

Chapter 11

HYDROLOGIC METHODS AND COMPUTATIONS

Table of Contents

CHAPTER SECTION HEADINGS

11.0	INTRODUCTION	11-4
11.1	PRECIPITATION – NOAA ATLAS 14	11-5
11.2	24-HOUR RAINFALL DISTRIBUTION AND RUNOFF HYDROGRAPHS	11-7
11.3	RUNOFF AND PEAK DISCHARGE	11-8
	11.3.1 Rational Method	11-8
	11.3.2 Modified Rational Method: Critical Storm Duration	11-10
	11.3.3 NRCS Methods	11-12
	11.3.4 NRCS Curve Number and Runoff Depth	11-13
11.4	THE VIRGINIA RUNOFF REDUCTION METHOD	11-16
	11.4.1 The Virginia Runoff Reduction Method as a Regulatory Standard	11-17
	11.4.2 Volumetric Runoff Coefficients (R_v)	11-19
	11.4.3 Treatment Volume (T_v)	11-20
	11.4.4 The Simple Method	11-23
	11.4.4.1 Total Phosphorus Event Mean Concentration	11-23
	11.4.4.2 Site-Based Total Phosphorus Load Limit	11-24
11.5	WATER QUALITY CALCULATIONS	11-25
	11.5.1 General Considerations: Stormwater Retention vs. Detention	11-25
	11.5.2 BMP Sizing Using the VRRM Treatment Volume	11-26
	11.5.2.1 Annual Volume and Pollutant Load Reduction Credit	11-29
	11.5.2.2 BMP Design Volume	11-30
	11.5.3 Water Quality Design T_v Peak Flow Rate	11-31
	11.5.4 On-Line and Off-Line BMPs	11-32
11.6	WATER QUANTITY CONTROL	11-35
	11.6.1 VSMP Channel Protection Criteria	11-36
	11.6.2 VSMP Channel Protection Criteria: Allowable Peak Discharge Computations	11-41
	11.6.3 Curve Number Adjustment for Large Storm Controls	11-43
	11.6.4 Storage Volume Computations	11-48
	11.6.5 VSMP Flood Protection Criteria	11-51
	11.6.6 Limits of Analysis	11-52

11.7	DEVELOPMENT ON PRIOR DEVELOPED LAND	11-52
11.7.1	Water Quality Criteria for Develop on Prior Developed Land	11-53
11.7.1.1	Redevelopment Sites that Do Not Increase Impervious Cover	11-54
11.7.1.2	Redevelopment Sites that Increase Impervious Cover	11-57
11.7.2	Water Quantity Criteria for Developed on Prior Developed Land	11-58
11.8	REFERENCES	11-59

FIGURES

Figure 11.1	NOAA Atlas 14 Data Rainfall Zones for Carroll County, VA	11-6
Figure 11.2	Rational Method Runoff Hydrograph	11-9
Figure 11.3	Modified Rational Method Family of Runoff Hydrographs	11-11
Figure 11.4	Simple Off-Line BMP	11-34
Figure 11.5	Theoretical Runoff and Discharge Hydrographs	11-39
Figure 11.6	Solution of Runoff Equation (TR-55, Figure 2-1)	11-47
Figure 11.7	TR-55 Detention Basin Routing	11-49

TABLES

Table 11.1	Land Cover Volumetric Runoff Coefficients (R_v)	11-20
Table 11.2	Primary BMP Sizing, Design, and Compliance Features	11-30
Table 11.3	Hydrology Terminology	11-40
Table 11.4	Site Hydrology: Drainage Area A	11-42
Table 11.5	Curve Number Adjustment from the VRRM Compliance Spreadsheet Channel and Flood Protection Tab	11-46
Table 11.6	Updated Site Hydrology for Drainage Area A, Developed Condition	11-47

EQUATIONS

Equation 11.1	Rational Formula	11-8
Equation 11.2	Rational Method Rainfall Intensity	11-10
Equation 11.3	NRCS Runoff Equation, Q (TR-55, Eq. 2-1)	11-12, 11-44
Equation 11.4	NRCS Runoff Equation, Ia (TR-55, Eq. 2-2)	11-12, 11-44
Equation 11.5	Modified NRCS Runoff Equation (TR-55, Eq. 2-3)	11-13, 11-44
Equation 11.6	NRCS Runoff Equation, S (TR-55, Eq. 2-4)	11-13, 11-44
Equation 11.7	Stormwater Treatment Volume (T_v)	11-21
Equation 11.8	Composite Volumetric Runoff Coefficient ($R_{v,composite}$)	11-22
Equation 11.9	Simple Method Pollutant Load Calculation	11-23
Equation 11.10	Water Quality Pollutant Load Reduction Requirement	11-25
Equation 11.11	Derivation of NRCS Curve Number and Runoff Equation	11-31
Equation 11.12	Modified NRCS TR-55 Eq. 4-1	11-32
Equation 11.13	“Energy Balance” of Pre- and Post-Development Runoff Conditions	11-39
Equation 11.14	VSMP Channel Protection Criteria: Energy Balance Method with NRCS Terminology	11-40
Equation 11.15	Energy Balance Method with NRCS Terminology – Solved for $q_{p,Allowable}$	11-42, 11-47
Equation 11.16	Modified Equation 11.3 [NRCS Runoff Equation, Q (TR-55, Eq. 2-1)] For Retention Storage	11-45

Equation 11.17	Load Reduction Requirements for Redevelopment (≥ 1 acre of disturbance)	11-55
Equation 11.18	Load Reduction Requirements for Redevelopment (< 1 acre of disturbance)	11-56
Equation 11.19	Redevelopment Load Reduction Limit	11-56

APPENDICES

Appendix 11-A	Hydrologic Soil Groups of Virginia Soils
Appendix 11-B	13-Hour Rainfall Depth Data for Virginia, derived from NOAA Atlas 14
Appendix 11-C	Runoff Depths for Selected NRCS Runoff Curve Numbers
Appendix 11-D	Stormwater Computer Models

11.0 INTRODUCTION

Hydrology is the study of the properties, distribution, and effects of water on the earth's surface, and in the soils, underlying rocks, and atmosphere. The elements of the hydrologic cycle that will be discussed in this Chapter are the statistical rainfall patterns and the response characteristics of the natural and developed landscapes.

The hydrologic cycle is very complex. Simulating even a small portion of it, such as the relationship between precipitation and surface runoff, can be an inexact science. Many variables and dynamic relationships must be accounted for and, in most cases, reduced to basic assumptions. Many of these assumptions have been incorporated into past regulatory and computational frameworks for managing stormwater, in an effort to establish criteria that are relatively simple to implement. Unfortunately, either as a result of these assumptions or in spite of them, the resulting stormwater designs often do not meet all the program goals. As discussed in **Chapter 10** of this Handbook, the increases in the volume, duration, and frequency of peak runoff events have continued to impact streams and aquatic resources.

The Virginia Stormwater Management Program (VSMP) regulations (**9 VAC 25-870**) attempt to address these stormwater impacts by adopting the Virginia Runoff Reduction Method (VRRM). Using this method, the preferred compliance approach will now be to manage (and reduce to the extent possible) the volume of runoff from the most frequent rainfall events as the basis for hydrologic and hydraulic designs of stormwater management strategies. In general terms, this represents the incorporation of Better Site Design strategies (otherwise referred to as Low Impact development, Green Infrastructure, Environmental Site Design, etc.) into a regulatory framework built around runoff volume reduction. It should be understood that, as with past regulations, the reduction of pollutant loads remains the chief compliance metric. The difference is that runoff volume reduction is now an important, and in some cases necessary, strategy to achieve the required pollutant load reductions. Runoff volume reduction is also linked with revised channel and flood protection criteria in the VSMP regulations.

There is still a need to model the peak discharge and hydrologic and hydraulic response characteristics of the developed watershed. However, as discussed in **Chapter 10**, the hierarchy of treatment objectives to achieve the runoff water quality requirements starts with runoff volume reduction. The volume reduction, as tabulated through the VRRM, can then be applied to the quantity control strategies.

These same principles of volume reduction and the regulatory compliance criteria regarding pollutant removal are applied to the requirements of development on prior developed lands (i.e., redevelopment).

The purpose of this chapter is to provide background regarding volume reduction, a basic review of the hydrologic principles, and the computational procedures that apply to the VSMP regulations. This Chapter will build on the basic hydrologic and hydraulic stormwater management calculations provided in Chapters 4 and 5 of the Virginia Stormwater Management Handbook, First Edition, 1999 (*Blue Book*). Specific sections of the *Blue Book* are referenced in this chapter (rather than repeating the information), and the reader is encouraged to access the

Blue Book chapters, which will be kept on the DEQ website as legacy guidance, for a more detailed explanation or derivation of these calculations.

11.1 PRECIPITATION – NOAA ATLAS 14

Precipitation is a random event that cannot be predicted with certainty based on historical data. However, any given precipitation event has several distinct and independent characteristics which can be quantified as follows:

- Duration** - The length of time over which precipitation occurs (hours).
Depth - The amount of precipitation occurring throughout the storm duration (inches).
Frequency - The recurrence interval of events having the same duration and volume.
Intensity - The depth divided by the duration (inches per hour).

The statistical recurrence interval of these rainfall characteristics is the universal basis for most of the design criteria of the Virginia Stormwater Program:

- A 1-year frequency storm event is the combined rainfall characteristics of **depth** and **duration** that have a statistical probability of occurring at least once in any given year.
- The recurrence frequencies of rainfall intensities and durations provide the basis for the Rational Method computation of peak discharge using the **Intensity-Duration-Frequency (IDF) Curves**.
- Linear regression of the IDF curves described above provide the “**a**” and “**b**” constants used for the Modified Rational Method Critical Storm duration direct solution.

While it is true that precipitation is random and the amount of rainfall next week can't be predicted by the rainfall that occurred last week, there are predictive models that can look at years of rainfall records and predict future rainfall patterns. The longer the period of record that is considered, the more accurate the statistical analysis will be. This is especially true as we observe changing precipitation patterns (**Chapter 4.3**); the most recent rainfall data will reflect these changes to the extent possible.

The basis for the rainfall depths, frequencies, and intensities used for design must now reference the National Oceanographic and Atmospheric Administration (NOAA) Atlas 14 “Precipitation-Frequency Atlas of the United States” Volume 2, Version 3.0 (NOAA Atlas 14). Similarly, any continuous simulation models (**Section 4.2.5 of Chapter 4, Blue Book**) should also use this source for the latest available rainfall data.

NOTE: The VSMP regulation (**9 VAC 25-870-72 A**) identifies the required design storms as follows: *Unless otherwise specified, the prescribed design storms are the one-year, two-year, and 10-year 24-hour storms using the site-specific rainfall precipitation frequency data recommended by the U.S. National Oceanic and Atmospheric Administration (NOAA) Atlas 14.*

NOAA Atlas 14 rainfall data are based on significantly more data than the previous data set (Technical Paper 40). Technical Paper 40 used data through 1958, whereas NOAA Atlas 14 uses data through 2000, vastly increasing the amount of data available. The NOAA Atlas 14 rainfall

data provides the basis for the NRCS 24-hour rainfall depths used to apply to the Type II Rainfall Distribution (Type III in portions of southeast Virginia)¹ and unit runoff hydrographs for computing peak discharges. These data were also used to generate new IDF curves for use with the Rational Method², and new “a” and “b” constants for use in the Modified Rational Method direct solution.

Appendix 11-B provides the NOAA Atlas 14 rainfall data in tabular form for the 1, 2, 5, 10, 25, 50, and 100-year return frequencies. Some counties may have two (or more) rainfall zones (based on geography and regional rainfall influences). Therefore the tabular form will list “Zone 1”, “Zone 2”, etc. **Figures 11.B-1** through **11.B.17** provide maps of those counties so designers can determine which rainfall depths are appropriate for the location of the project. For example, **Figure 11.1** represents the four rainfall zones in Carroll County, Virginia.

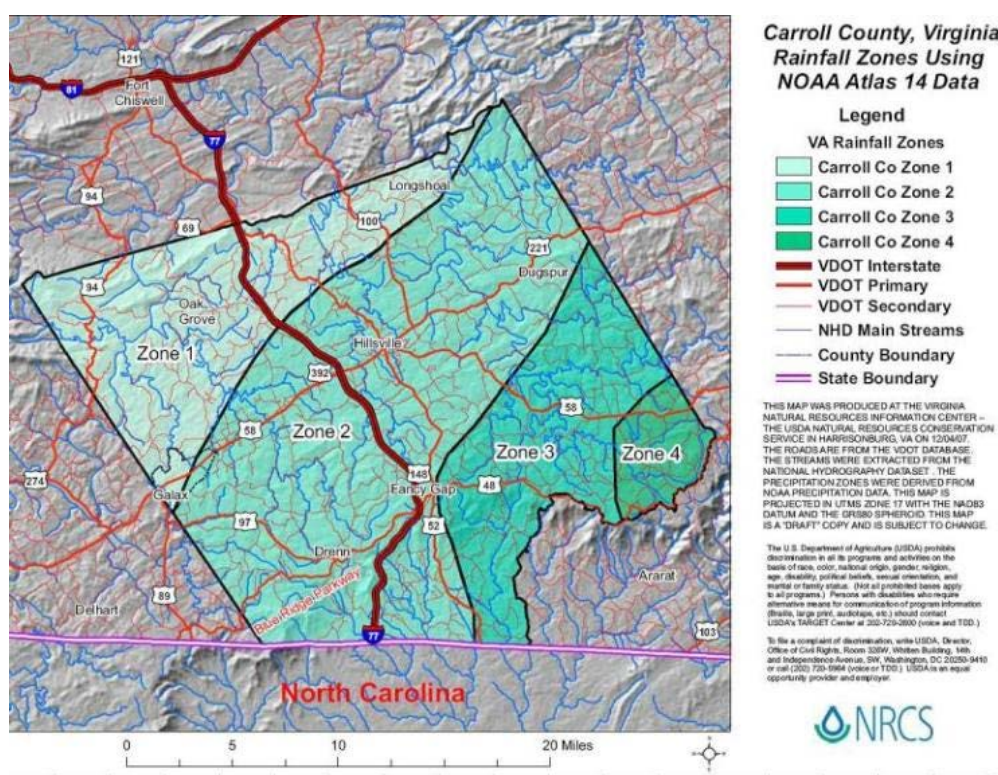


Figure 11.1. NOAA Atlas 14 Data Rainfall Zones for Carroll County, VA

¹ NRCS has advised that the NOAA Atlas 14 rainfall data may not follow the current Type II and Type III temporal rainfall distribution curves and should be used with caution for storms greater than the 10-year event. New software for TR-55, TR-20, and EFH-2 will be developed that will convert the Atlas 14 data to county-specific temporal distribution curves.

² To simplify the access and use of the new IDF Curves generated by Atlas 14 generated rainfall data, VDOT has developed a set of “B, D, & E” factors for each county and major city throughout the Commonwealth for the 2, 5, 10, 25, 50, & 100-yr recurrence interval storm durations, found in Appendices 6C-1 and 6C-2 in Chapter 6 of the VDOT Drainage Manual, at:

<http://www.extranet.vdot.state.va.us/locdes/electronic%20pubs/2002%20Drainage%20Manual/pdf/drain-manual-chapter-06.pdf>

11.2 24-HOUR RAINFALL DISTRIBUTION AND RUNOFF HYDROGRAPHS

The NRCS 24-hour storm distribution curve was derived from the National Weather Bureau's Rainfall Frequency Atlases. Further detailed discussion of the derivation and application of the 24-hour rainfall distribution used to generate a runoff hydrograph is provided in **Section 4-2.3 of Chapter 4** of the *Blue Book*, and Part 630 (Hydrology) of the USDA-NRCS's *National Engineering Handbook* (NRCS NEH). The reader will also find a detailed discussion of NRCS Runoff Hydrographs, including unit hydrographs and synthetic hydrographs in **Section 4-3 of Chapter 4** of the *Blue Book*.

There have been numerous studies of small storm hydrology and the potential for underestimating runoff using the NRCS Runoff Equation (Pitt, 1999). However, the small storm based provisions of the VSMP regulations (**9 VAC 25-870-65. Water Quality Compliance**) requires the use of the VRRM to manage a Treatment Volume (T_v) that is calculated using a rainfall depth and volumetric runoff coefficients (R_v), and not the NRCS Runoff Equation. The VRRM and T_v are described in more detail in **Section 11.4** of this chapter.

Section 9 VAC 25-870-72 C of the VSMP regulation, covering design storms and hydrologic methods, states the following:

The U.S. Department of Agriculture's Natural Resources Conservation Service (NRCS) synthetic 24-hour rainfall distribution and models, including, but not limited to WinTR-55 and WinTR-20; hydrologic and hydraulic methods developed by the U.S. Army Corps of Engineers; or other standard hydrologic and hydraulic methods, shall be used to conduct the analyses described in this part.

The regulation goes on to allow the use of the Rational and Modified Rational Methods, since these are commonly used methods (**9 VAC 25-870-72 D & E**):

D. For drainage areas of 200 acres or less, the stormwater program administrative authority may allow for the use of the Rational Method for evaluating peak discharges.

E. For drainage areas of 200 acres or less, the stormwater program administrative authority may allow for the use of the Modified Rational Method for evaluating volumetric flows to stormwater conveyances.

The reader should note that the volume reduction credit that applies to the VSMP Quantity Control requirements (**9 VAC 25-870-66**) has been developed to readily apply to NRCS methodology using the NRCS Runoff Equation (**Section 11.6** of this chapter). Further, the Rational Method has traditionally been used for computing peak discharges for sizing pipes and drainage conveyance infrastructure, for which the upper acreage threshold of 200 acres may be appropriate. However, there are limitations on the appropriateness of the Rational and Modified Rational Methods as stormwater management sizing and compliance tools. These methods, as well as the NRCS method, and their applicability and limitations are described below.

11.3 RUNOFF AND PEAK DISCHARGE

The practice of estimating runoff as a fixed percentage of rainfall has been used in the design of storm drainage systems for over 100 years. Despite its simplification of the complex rainfall-runoff processes, it is still the most commonly used method for urban drainage calculations. It can be accurate when drainage area land cover is highly impervious and/or homogeneous.

For urbanizing watersheds or drainage areas comprised of pervious cover such as open space, woods, lawns, or agricultural land uses, with varying amounts of impervious cover mixed in throughout the entire area, the rainfall/runoff relationship becomes much more complex.

In very general terms, hydrologic methods can be grouped by their capability to effectively model the land uses, combine the flows from distinct drainage areas, and provide the output in a format applicable to stormwater design. This section will provide a very brief overview of the methods acknowledged in the VSMP regulations: the Rational Method, the Modified Rational Method, and NRCS Methods. The NRCS Methods include numerous modeling and predictive techniques. However, the use of the NRCS basic hydrologic principles of Curve Number (*CN*), Time of Concentration (*T_c*), and a runoff hydrograph and peak discharge are covered here as described in *Technical Release 55: Urban Hydrology for Small Watersheds*. (NRCS, 1986).

As mentioned previously, the reader is also encouraged to review **Section 4-4 of Chapter 4** of the *Blue Book* for additional detail and applicability of these methods.

11.3.1 Rational Method

The *Rational Method* was introduced in 1880 as a way to determine peak discharges from drainage areas. It is frequently criticized for its simplistic approach, but this same simplicity has made the Rational Method one of the most widely used techniques today for calculating peak discharge from urban land uses.

The Rational Formula estimates the peak rate of runoff at any location in a drainage area as a function of the *runoff coefficient*, *mean rainfall intensity*, and *drainage area*. The *Rational Formula* is expressed as follows:

Equation 11.1. Rational Formula

$$Q = CIA$$

Where:

- Q* = maximum rate of runoff (cfs)
- C* = dimensionless runoff coefficient, dependent upon land use (refer to **Section 4-4.1 in Chapter 4** of the *Blue Book* for reference to acceptable runoff coefficients).
- I* = design rainfall intensity (in./hr.), for a duration equal to the time of concentration of the watershed
- A* = drainage area (acres)

As with all hydrologic methods, there are numerous assumptions related to the rainfall duration and intensity as a function of the drainage area size. Given the highly impervious urban landscape origins of the Rational Method, it is logical to establish that under steady rainfall the peak discharge occurs once the entire drainage area is contributing to the point of study. This occurs at a time (t) equal to the Time of Concentration (T_c). Since the method was developed only to predict the maximum peak discharge, the continuation of rainfall – in theory – does not cause any increase in peak rate of discharge. **Figure 11.2** illustrates a Rational Method runoff hydrograph.

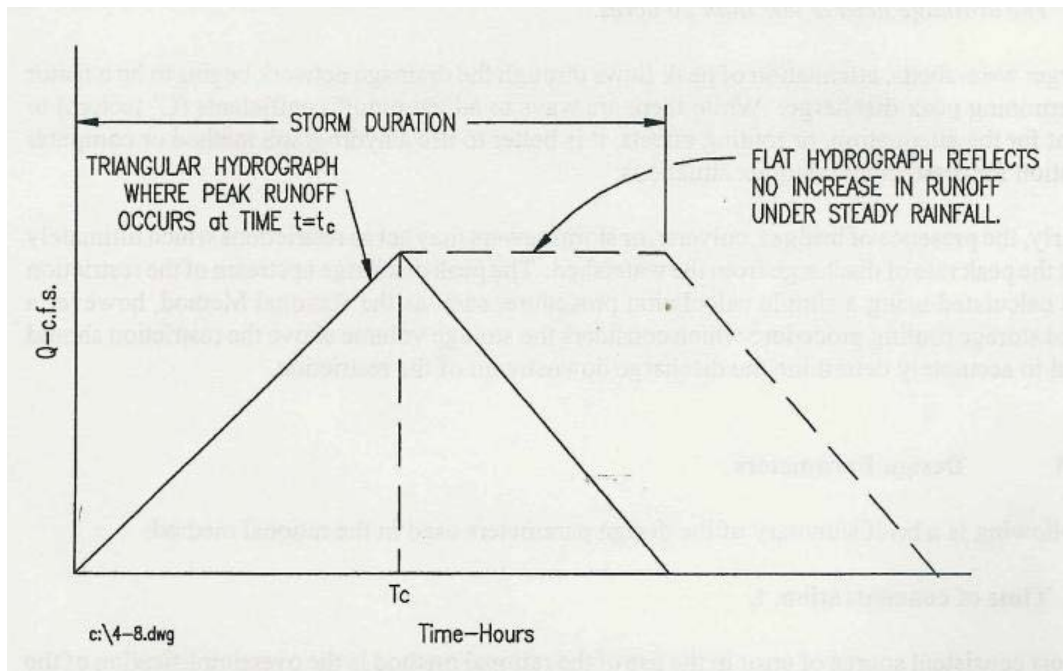


Figure 11.2. Rational Method Runoff Hydrograph

An important and possibly limiting factor is the lack of a true runoff hydrograph. As stated, the method was developed to predict peak flow rates occurring when the entire drainage area is contributing runoff. Establishing an arbitrary storm duration that is considered equal to the T_c , or some longer duration, can create a simple runoff hydrograph (in this case in the shape of a triangular or trapezoidal shape). However, the critical elements are not related to rainfall or land use patterns other than the intensity of the rainfall maximum return frequency. This may be appropriate for calculating a peak discharge, but it is arbitrary in terms of a total volume of runoff (defined as the area under the triangular or trapezoidal hydrograph shown in **Figure 11.2**). Quantifying the volume of runoff is important in demonstrating compliance with the VSMP quantity control requirements.

Based on these factors, and others described in **Section 4-4.1 of Chapter 4 of the Blue Book**, the use of the Rational Method as a hydrologic method for stormwater management facility design is typically limited as follows:

1. *The contributing drainage area is highly impervious;*
2. *The contributing drainage area has a time of concentration, T_c , less than 20 minutes; and*
3. *The contributing drainage area is less than 20 acres.*

Note: This guidance contradicts the allowed upper limit of 200 acres (VSMP Authority option) provided in **9 VAC 25-870-72.D & E**, as noted above. Designers should verify the VSMP Authority requirements regarding acceptance of this or other hydrologic methods for demonstrating compliance with the VSMP regulations.

When using the Rational Method, the designer will no longer use the IDF curves to determine the rainfall intensity for the calculated T_c . Instead, the designer should refer to the “B, D, & E” factors for each county and major city throughout the Commonwealth for the 2, 5, 10, 25, 50, & 100-year recurrence interval storm durations (T_c) (NOTE: B, D, & E factors are not available for the 1-year design storm). As noted above, the B, D, & E factors were derived from the NOAA Atlas 14 rainfall data by VDOT and are published by VDOT in the VDOT Drainage Manual Appendix 6C-1 and 6C-2 at:

<http://www.extranet.vdot.state.va.us/locdes/electronic%20pubs/2002%20Drainage%20Manual/pdf/drain-manual-chapter-06.pdf> (revised 7/09)

The values are used to compute the rainfall intensity I (inches/hour) as follows:

Equation 11.2 Rational Method Rainfall Intensity

$$I_f = \frac{B}{(T_c + D)^E}$$

Where:

I_f = Rainfall intensity for a given year recurrence interval (2, 5, 10, 25, 50, & 100-year) in inches/hour

T_c = Drainage area time of concentration assumed equal to the storm duration), in minutes

11.3.2 Modified Rational Method: Critical Storm Duration

The modified rational method is a variation of the Rational Method, developed mainly for the sizing of detention facilities in urban areas. The Modified Rational Method is applied in a manner similar to that of the Rational Method, except that it uses a fixed rainfall duration. The Rational Method generates the peak discharge that occurs when the entire watershed is contributing to the peak (at a time $t = T_c$) of a triangular hydrograph and ignores the effects of a storm which lasts longer than time t . The modified rational method, on the other hand, considers storms with a longer duration than the watershed T_c , which may result in a smaller or larger *peak rate of discharge*, but will produce a greater *volume* of runoff (area under the triangular or trapezoidal hydrograph) associated with the longer duration of rainfall. **Figure 11.3** below shows a family of hydrographs representing storms of different durations.

NOTE: The storm duration which generates the greatest volume of runoff may not necessarily produce the greatest peak rate of discharge.

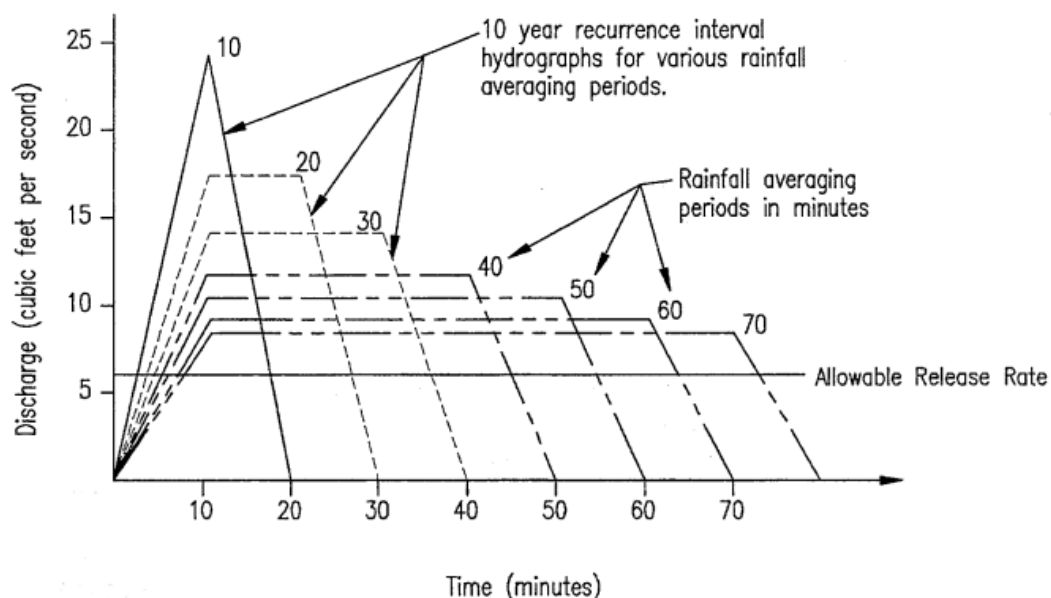


Figure 11.3. Modified Rational Method Family of Runoff Hydrographs

All of the limitations listed for the Rational Method also apply to the Modified Rational Method. The key difference is the assumed shape of the resulting runoff hydrograph. The modified rational method allows the designer to analyze several different storm durations to determine the one that requires the greatest storage volume with respect to the allowable release rate. This storm duration is referred to as the *critical storm duration* and is used as a basin sizing tool. The technique is discussed in more detail in **Section 4-4.2** of **Chapter 4** of the *Blue Book*.

The designer might perform an iterative calculation to determine the rainfall duration which produces the maximum storage volume requirement when sizing a detention basin. Or, a simpler approach would be to calculate the Modified Rational Method Critical Storm Duration Direct Solution which uses rainfall “a” and “b” constants. These constants have been updated to reflect the NOAA Atlas 14 rainfall data, however, there are no values for the 1-year storm event and therefore may not be applicable to the VSMP channel protection criteria. A detailed explanation of the computational procedure is provided in **Section 5-4.3** of **Chapter 5** of the *Blue Book*. The updated “a” and “b” constants can be found in the VDOT Drainage Manual Appendix 11-H-1 and 11H-2 at:

<http://www.extranet.vdot.state.va.us/locdes/electronic%20pubs/2002%20Drainage%20Manual/pdf/drain-manual-chapter-11.pdf> (revised 7/09)

Chapter 11.5.4.2 of the VDOT Drainage Manual provides important usage instructions for the “a” and “b” constants.

11.3.3 NRCS Methods

The USDA-Natural Resource Conservation Service (NRCS) published Technical Release Number 55 (TR-55), 2nd edition, in June of 1986, entitled *Urban Hydrology for Small Watersheds*. NRCS has digitized this hydrologic model and currently uses and refers to “WinTR-55,” and there is no longer a printed reference book.

NOTE: The Virginia Office of the USDA-NRCS is in the process of updating and coordinating their hydrological methodologies with the NOAA Atlas 14 data. Rainfall distribution tables have been updated to reflect the NOAA Atlas 14 data (see Appendix 11-B). As well, the TR-55 and TR-20 hydrologic models have been converted into computer models (WinTR55 and WinTR20). The older TR-55 and TR-20 documentation used tables and graphs that are no longer used in WinTR55 and WinTR20. The newer computer models are also be implementing the NOAA Atlas 14 rainfall frequency data, including rainfall depths and rainfall distributions. However, since these conversions are still a work in progress, this chapter will refer to the old TR-55 way of doing things, and will be updated at a future date to incorporate the new reference materials.

The techniques outlined in *TR-55* require the same basic data as the rational method: drainage area, time of concentration, land use and rainfall. The NRCS approach, however, is more sophisticated in that it allows the designer to manipulate the time distribution of the rainfall, the initial rainfall losses to interception and depression storage, and the moisture condition of the soils prior to the storm. **Section 4-4.3 of Chapter 4 of the *Blue Book*** provides a detailed description of these variables.

TR-55 presents two general methods for estimating peak discharges from urban watersheds: the **graphical method** (see **Section 4-4.4 of Chapter 4 of the *Blue Book***) and the **tabular method** (see **Section 4-4.5 of Chapter 4 of the *Blue Book***). The graphical method is limited to watersheds whose runoff characteristics are fairly uniform and whose soils, land use, and ground cover can be represented by a single Runoff Curve Number (*CN*).

The tabular method is a more complete approach and can be used to develop a runoff hydrograph at any point in a watershed. For large watersheds, it may be necessary to divide the area into sub-watersheds in order to account for major land use changes, analyze specific study points within sub-watersheds, or locate stormwater drainage facilities and assess their effects on peak flows. *The tabular method can generate a hydrograph for each sub-watershed for the same storm event.* The hydrographs can then be *routed* through the watershed and combined to produce a partial composite hydrograph at the selected study point. *The tabular method is particularly useful in evaluating the effects of an altered land use in a specific area within a given watershed.*

NOTE: As noted above, the NRCS tabular method is presented in the *Blue Book* and referenced here in an effort to distinguish the difference between the graphical peak discharge and tabular hydrograph methods. The tabular method of

developing a runoff hydrograph is relatively straight forward, yet cumbersome when attempted long-hand (pencil and paper), much like the storage indication routing technique outlined in **Section 5-9** (*Hydrograph Routing*) of **Chapter 5** of the *Blue Book*. While both these methods are straightforward, computing them long-hand is comparable to using an abacus or a slide rule to compute standard engineering calculations. VSMP Authority site plan reviewers are not likely to encounter a plan using either the long-hand TR-55 Tabular Hydrograph Method or long-hand Storage Indication Routing in the final stormwater design computations.

In most cases, the designer will use the NRCS methods to develop the base hydrology (CN , T_c , graphical peak discharge [q_p], etc.), and use that data in one of the numerous hydrologic/hydraulic computer models (including TR-55, TR-20, HEC 1, etc.).

The NRCS methods of graphical peak discharge are covered in detail in *Blue Book* and will not be repeated in the same detail here, other than to describe how they apply to the VRRM. The reader is strongly encouraged to obtain a copy of the TR-55 manual from the USDA-NRCS to gain more insight into the procedures and limitations.

11.3.4 NRCS Curve Number and Runoff Depth

Prior to using either the graphical or tabular methods to calculate a peak discharge, the designer must determine the watershed weighted CN and the T_c . The NRCS CN is used to develop the rainfall-runoff relationship and estimate the depth of runoff (Q) in inches. This method is described in detail in Part 630 of the NRCS *National Engineering Handbook (NEH, NRCS, 1985)*. The *runoff equation* (found in TR-55 and discussed later in this section) provides a relationship between rainfall and runoff as a function of the CN . The CN is a measure of the land's ability to infiltrate or otherwise detain rainfall, with the excess becoming runoff. The CN is a function of the land cover (woods, pasture, agricultural use, percent impervious, etc.), hydrologic condition, and soils.

The VSMP regulations address the development of the rainfall-runoff relationship very specifically in **9 VAC 25-870-66 Water Quantity**:

E. For purposes of computing predevelopment runoff, all pervious lands on the site shall be assumed to be in good hydrologic condition in accordance with the U.S. Department of Agriculture's Natural Resources Conservation Service (NRCS) standards, regardless of conditions existing at the time of computation. Predevelopment runoff calculations utilizing other hydrologic conditions may be utilized provided that it is demonstrated to and approved by the VSMP authority that actual site conditions warrant such considerations.

F. Predevelopment and postdevelopment runoff characteristics and site hydrology shall be verified by site inspections, topographic surveys, available soil mapping or studies, and calculations consistent with good engineering practices. Guidance

provided in the Virginia Stormwater Management Handbook and by the Virginia Stormwater BMP Clearinghouse shall be considered appropriate practices.

This regulatory language clearly places significant emphasis on accurate field reconnaissance to verify the information needed to develop a *CN* for both the pre- and post-development conditions. While it may seem arbitrary that the pre-development land cover must be considered to be in “good” condition, the premise is that if it is not in good condition, this is likely due to some form of land disturbance or use and, therefore, not reflective of true *pre-development* conditions.

Curve Number: *Section F* of the VSMP regulations noted above identifies the level of effort required to collect the data needed to establish the *CN*:

1. Soils mapping (to determine the hydrologic soil group): **Section 4-4.3.3 of Chapter 4** of the **Blue Book** provides a detailed description of the NRCS Hydrologic Soil Group (HSG) Classification. **Appendix 11-A** of this chapter provides a list of the HSG classifications for the soils of Virginia. The designer should consult **BMP Specification No. 8, Appendix 8-A: Infiltration and Soil Testing** for guidance on determining the equivalent HSG for soils that have been disturbed by prior development or other impacts.
2. Land cover type (impervious, woods, grass, etc.).
3. Treatment (cultivated or agricultural land).
4. Hydrologic condition (for design purposes, the hydrologic condition should be considered "GOOD" for the pre-development condition).
5. Urban impervious area modifications (connected, unconnected, etc.).
6. Topography – detailed enough to accurately identify drainage divides, t_c and T_t flow paths and channel geometry, and surface condition (roughness coefficient).

NOTE: Terminology Alert 1 – It is very important to recognize that TR-55 and the VRRM use the term *Open Space* differently:

- The VRRM considers *managed turf* to be equivalent to the TR-55 *open space*, that is: lawns, parks, golf courses, and cemeteries, with a *CN* equivalent to pasture/grassland in good hydrologic condition. This generally represents lawn areas that have been cleared and/or graded to accommodate development.
- The VRRM considers *Open Space* to be protected undisturbed (or restored) land comparable to *Forest* and equivalent to the TR-55 *woods*, that is: wooded areas protected from grazing with ground litter and brush covering the soil.

The VRRM definition of what can be considered *Forest/Open Space* is provided in **Table 12.1 of Chapter 12** of this Handbook, and includes land that will remain undisturbed OR that will be restored to a hydrologically functional state; as well as land that will be subject to minimal operational and management activities so as to minimize the compaction of soils, the application of fertilizers, and other impacts. In all cases, the designation of lands as *Forest/Open Space* will require some form of a protective covenant.

The designer should refer to **Chapter 4** of the *Blue Book* or more appropriately TR-55 for a full explanation of the basis for NRCS CN 's.

Runoff Depth Q : The runoff depth is the measure of the fraction of rainfall that becomes runoff. The NRCS runoff equation (TR-55 2-1) is used to solve for runoff depth, Q , in inches, as a function of rainfall depth and CN :

Equation 11.3. NRCS Runoff Equation, Q [TR-55 Eq. 2-1]

$$Q = \frac{(P - I_a)^2}{(P - I_a) + S}$$

Equation 11.4. NRCS Runoff Equation, I_a [TR-55 Eq. 2-2]

$$I_a = 0.2S$$

Equation 11.5. Modified NRCS Runoff Equation [TR-55 Eq. 2-3]

$$Q = \frac{(P - 0.2S)^2}{(P + 0.8S)}$$

Equation 11.6. NRCS Runoff Equation: S [TR-55 Eq. 2-4]

$$S = \frac{1000}{CN} - 10$$

Where: Q = runoff depth (in),
 P = rainfall depth (in),
 I_a = Initial abstraction (in),
 S = potential maximum retention after runoff begins (in),
 CN = Curve Number

These terms are further described, as follows:

- The Runoff Depth (Q) is measured in inches and can also be referred to in units of watershed-inches, meaning it represents the depth of runoff across the watershed or drainage area as described by the CN , and can easily be converted into a volume of runoff. (The runoff equation figures prominently in the application of the volume reduction credit when applied to the quantity control requirements; see **Section 11.6** of this Chapter.)

NOTE: Terminology Alert Number 2 – the term Q is often used in stormwater designs to refer to peak discharge measured in cubic feet per second (*cfs*). However, NRCS methodology uses Q to refer to runoff depth, in inches, as noted in the NRCS Runoff Equation above. The runoff depth is readily converted to

runoff volume by multiplying by the drainage area, or is converted to peak discharge (q , measured in units of cubic feet per second, or cfs) through a process of convolution using a unit hydrograph or the TR-55 Graphical Peak Discharge method.

The VRRM Compliance Spreadsheet's *Channel and Flood Protection* tab uses the term RV for the Runoff Depth in inches as applied to the CN adjustment. Further discussion of the VSMP regulation Quantity Control Criteria will require further clarification of these terms (see **Section 11.6.1** of this Chapter).

- The rainfall (P) as required by the VSMP regulations is as follows:
 - 1-inch of rainfall is determined to be the 90th percentile rainfall depth, required by the VRRM to address the annual pollutant load reduction requirements (**9 VAC 25-870-65 Water Quality Compliance**). The determination of the 90th percentile rainfall is discussed in more detail in **Section 10.1.2** of **Chapter 10** of this Handbook; or
 - 1-year 24-hour storm, 2-year 24-hour storm, and/or the 10-year 24-hour storm rainfall depths, as derived from NOAA Atlas 14 (**Appendix 11-B**) as required for addressing the water quantity (stream channel and flood protection) requirements (**9 VAC 25-870-66. Water Quantity**).
- Initial abstraction (Ia) is the combination of all rainfall losses before runoff begins, and consists mainly of interception, infiltration during early parts of the storm, and surface depression storage. It is measured in inches and can be described as the depth of rainfall that occurs before runoff begins. Infiltration during the early part of the storm is highly variable and dependent on such factors as rainfall intensity, soil crusting, and soil moisture (antecedent condition); however, it is generally correlated with soil and land cover parameters. Values for Ia can be obtained in TR-55.
- The potential maximum retention (S) after runoff begins is dependent upon the soil cover complex and, in principle, should not vary from storm to storm. It is the depth of rainfall that is captured and retained on the landscape in excess of the initial abstraction. **The application of Runoff Reduction practices serves to increase the maximum retention (S), thereby decreasing the CN** (discussed further in **Section 11.6.3** of this Chapter).

TR-55 provides a graphical solution for the runoff equation, provided in **Appendix 11-C**. Also, the National Engineering Handbook provides the runoff depths for selected CNs in tabular form, also provided in **Appendix 11-C**. Additional information on the derivation, assumptions, and limitations of the Runoff Equation can be found in Part 630 of the NRCS *National Engineering Handbook*.

11.4 THE VIRGINIA RUNOFF REDUCTION METHOD

The Virginia Runoff Reduction Method (VRRM) is designed to provide a more consistent path towards achieving the water quality treatment objectives (nutrient reductions) and performance goals (annual load reductions) as identified by the VSMP regulations: the reduction of nutrients,

specifically Total Phosphorus (TP), to a prescribed site-based annual pollutant load limit ($TP \leq 0.41 \text{ lb/ac}$). (see **Section 11.4.4** of this Chapter)

Previous stormwater quality regulatory performance goals were focused, figuratively speaking, on scrubbing the target pollutants out of each drop of storm water with the application of BMPs. This strategy is dependent on the BMP's ability to reduce the Event Mean Concentration (EMC in mg/l) of the pollutant in the runoff. The challenges with this strategy have become very apparent:

- BMP performance is highly variable. Nutrient removal, especially TP and TN, can be very difficult to target and quantify based on seasonal and other factors;
- Nutrients in the natural environment can exist in different forms and at a wide range of concentrations. In some circumstances, it may be physically impossible, using BMPs only, to consistently reduce the EMC of any given pollutant to the extent required by the VSMP regulations or that which may be required to meet water quality goals. For many pollutants, the outflow from a BMP is limited by the threshold of an "irreducible concentration," which is reflective of the limits of the treatment mechanisms.

Therefore, the VRRM adds the reduction of runoff volume as an important treatment objective, representing a significant means to achieve the primary compliance objective of pollutant removal. In theory, where BMPs may not be able to consistently reduce the EMC of a pollutant (the amount of pollutant in each drop of water), the runoff reduction strategies aim to reduce the total number of drops of runoff, thereby dramatically improving the total annual pollutant load reduction performance. This overall performance can be characterized as follows:

$$\text{Total Load Reduction (TR) lb/yr} = \text{Runoff Reduction (RR)} + \text{Pollutant Removal (PR)}$$

Another primary goal of the VRRM is to establish a link between the water quality and water quantity requirements of the regulations. The Code of Virginia (§ 10.1-603.4. Development of regulations) establishes that the VSMP regulations should encourage the use of Low Impact Development. While not actually mandating specific site design strategies, the VRRM incorporates provisions that allow the designer to compute the hydrologic credit of incorporating structural and nonstructural volume reduction water quality protection strategies and, by doing so, to reduce the storage volume required to meet the water quantity (channel and flood protection) requirements.

Chapters 5 and 6 of this Handbook provide extensive amounts of information related to stormwater management approaches and site design strategies that reduce stormwater volume. The VRRM Technical Memo (CWP 2008) provides the supporting documentation for the runoff reduction capabilities and updated pollutant removal performance of the different BMPs. **Section 11.6** of this chapter provides information on crediting runoff volume reduction for water quantity control requirements.

11.4.1 The Virginia Runoff Reduction Method as a Regulatory Standard

Section 9 VAC 25-870-65.A of the VSMP regulation requires that:

- A. *Compliance with the water quality design criteria set out in subdivisions 1 and 2 of 9 VAC 25-870-63 shall be determined by utilizing the Virginia Runoff Reduction Method or another equivalent methodology that is approved by the board.*
- B. *The BMPs listed below are approved for use as necessary to effectively reduce the phosphorus load and runoff volume in accordance with the Virginia Runoff Reduction Method.*

This establishes the VRRM as the computational method for demonstrating compliance (however, the Board may authorize the use of an “equivalent” methodology). **Section 9 VAC 25-870-63**, referred to in the citation above, establishes the water quality design criteria requirements; and the reference to the “BMPs listed” establishes that BMPs listed on the Virginia BMP Clearinghouse website are the practices authorized to be used for compliance.

The VRRM represents a simple computational method that establishes specific values for several fundamental parameters of stormwater management. These parameters, listed below, represent the core functional elements of the method:

1. Volumetric runoff coefficients for three basic land cover types (undisturbed forest/open space; disturbed areas/managed turf; and impervious cover) based on Hydrologic Soil Groups.

The volumetric runoff coefficients (R_v) are discussed in detail in the VRRM Technical Memo (CWP 2008), and **Section 5.3.2 of Chapter 5** and **Section 10.1.2.1 of Chapter 10** of this Handbook. These coefficients, based on extensive research, reflect the relative contributions of the different land covers to both runoff volume and runoff pollutant loads.

NOTE: Terminology Alert 3 – This R_v term should not be confused with the VSMP regulation Channel Protection Criteria Energy Balance Equation term for runoff volume, labeled as RV . Refer to Table 11.3 in Section 11.6.1 of this Chapter.

2. Computational procedures for determining the BMP design Treatment Volume (T_v) using the 90th percentile rainfall depth.

The T_v is a central component of the VRRM and represents the common currency of site-based stormwater management, linking the water quality and quantity criteria together. The T_v and the establishment of the 90th percentile rainfall depth is discussed in more detail in **Section 5.3.3 of Chapter 5** and **Section 10.1.2 of Chapter 10** of this Handbook.

3. Computational procedure for calculating annual pollutant loading from a developed site; Simple method.

The VRRM uses a modified Simple Method (**Equation 11.9, Section 11.4.4**) for calculating the annual pollutant load from the developed site. The calculation is performed for the entire site to establish the target load reduction requirement, and for each drainage area to

determine the relative reduction achieved by the implementation of BMPs. The load reduction achieved through the implementation of structural and nonstructural BMPs must be such that the calculated site-based total annual load is less than or equal to 0.41 lb/ac/yr (**9 VAC 25-870-63.A.1**).

4. Runoff reduction and pollutant removal credits for specific BMPs (the sizing of which are governed by the BMP Design Specifications approved by Director of the Department of Environmental Quality [DEQ] and posted on the Virginia BMP Clearinghouse website);

The VRRM Technical Memo (CWP 2008) identifies the research that supports the BMP pollutant removal and volume reduction credits adopted by the DEQ. The basis of the BMP design specifications, including the Level 1 and Level 2 designs and performance credits, includes a thorough review of the National Stormwater Quality Database (NSQD 2004), the National Pollutant Removal Performance Database (version 3 (CWP, 2007)), and a literature review and synthesis of 50 stormwater technical notes and in-depth analysis of more than 70 BMP research studies. Level 1 and Level 2 BMP standards are discussed further in **Section 11.4.3** of this Chapter.

5. Computational procedures are provided for a simplified *CN* adjustment to account for runoff reduction practices when evaluating compliance with the water quantity control requirements (channel and flood protection) of **9 VAC 25-870-66**.

Several methods of manipulating the large storm runoff hydrograph to reflect the runoff reduction achieved in meeting the water quality requirements were considered. The *CN* adjustment was considered a reasonable estimation of the runoff hydrograph, and is covered in more detail in **Section 11.6.3** of this Chapter.

11.4.2 Volumetric Runoff Coefficients (*R_v*)

Chapter 5.3.4 describes the VRRM three-step compliance strategy. The compliance objective is still to meet the site-based pollutant load limit for Total Phosphorus. Therefore, the three-step strategy represents the suggested means to achieve that load limit, beginning with site design and runoff reduction practices. In that context, the regulatory requirement is not to incorporate all three steps for every development site. Depending on site characteristics and load reduction requirements, a site may incorporate one, two, or all three of the steps. Nevertheless, the three steps are a sound way to start developing a compliance strategy. The three steps are as follows:

Step 1: Apply Environmental Site Design (ESD) practices (see Chapter 6) to minimize impervious cover, grading, and loss of forest cover. This step includes the conservation of open spaces where the natural soil horizon and native vegetation is preserved. Employing these practices can result in a reduction of the required water quality Treatment Volume (*T_v*) and pollutant load generated by the site, *before any BMPs are selected and applied to the site design.*

Step 2: Apply Runoff Reduction (RR) BMPs to reduce the runoff volume generated by the developed portions of the site. This step includes the selection of those BMPs that have

demonstrated the ability to retain runoff volume through evapotranspiration, infiltration, extended filtration, and alternative use (such as rainwater harvesting). This step also includes the restoration or the protection of established hydrologically functional areas of the site, such as buffers, conserved open space, reforested areas, addition of soil amendments, etc.; and

Step 3: Apply Pollutant Removal (PR) BMPs to achieve any remaining pollutant removal that may be required to achieve the required annual load limit of 0.41 lb/ac. This step can also include the purchase of nutrient offsets or other off-site compliance options.

The primary objective of Step 1 is to reduce the overall site runoff volume. The computational equivalent would be to reduce the runoff depth (Q) described in **Section 11.3.4**. In some cases, the implementation of ESD practices will be self-crediting; that is, designs that reduce impervious cover and/or maintain forested areas will have a lower CN and thereby a lower overall runoff depth computed, using the NRCS Runoff Equation. Likewise, the VRRM computational procedure for computing the annual pollutant load and the corresponding runoff Tv for BMP sizing will self-credit when areas of the site are undisturbed or designated for restoration and/or protection. **Table 11.1** provides the relevant volumetric runoff coefficients (Rv).

Table 11.1. Land Cover Volumetric Runoff Coefficients (Rv)

Land Cover	Runoff Coefficients			
	HSG-A	HSG-B	HSG-C	HSG-D
Forest/Open Space	0.02	0.03	0.04	0.05
Disturbed Soil or Managed Turf	0.15	0.20	0.22	0.25
Impervious Cover	0.95			

Source: CWP, 2008

As illustrated by the Rv values in **Table 11.1**, the effect of grading, site disturbance, and soil compaction greatly increases the runoff coefficient compared to forested areas. These values are based on research (CWP, 2008) that includes small storm hydrology factors in order to correlate the 1-inch rainfall event to an annual volume of runoff. That is, by managing the runoff from the 1-inch rainfall event, the total annual volume of rainfall that is managed can be translated to an equivalent annual volume of runoff and pollutant load computation.

The designer will enter the acres of *Forest/Open Space*, *Managed Turf*, and *Impervious Cover* into the User Input cells of the Site Data tab and the appropriate drainage area (D.A.) tabs of the VRRM Compliance Spreadsheet. The spreadsheet will generate a composite Rv for the site and the drainage areas. This composite Rv is comparable to a NRCS CN or the Rational Method runoff coefficient in that it describes how much rainfall becomes runoff.

The proper assignment of R_v values to the different land covers requires that the designer have accurate soil information for the site. Another element in selecting R_v values is verifying that any acreage that is to be designated as *Forest/Open Space* will in fact be preserved, both during construction and after construction. This means that these areas must be designated to be protected on the erosion and sediment control plan, and an enforceable recorded protective documentation (e.g., easement) must be developed and executed prior to plan approval.

11.4.3 Treatment Volume (T_v)

Treatment Volume (T_v) is the calculated design volume of runoff that must be managed to meet the VSMP water quality requirements. The VSMP water quality load limit for TP is a site-based limit, meaning that the T_v does not need to be “zeroed out.” The T_v is reduced to the point where the site-based load limit is achieved. In other words, if enough total load reduction (TR) is achieved through runoff reduction (RR), Pollutant removal (PR), or a combination of the two in one portion of the site or drainage area, the remaining area does not require treatment. (On the other hand, every point of stormwater discharge from the site must be analyzed to show compliance with the VSMP water quantity requirements.)

NOTE: Terminology Alert Number 4 – The term Treatment Volume (T_v) refers to the volume associated with a particular drainage or land area based on the land cover and resulting volumetric Runoff Coefficient (R_v – see **Section 11.4.2**). There can be a T_v for the entire site (based on the composite Runoff Coefficient), a T_v for a particular drainage area within the site (for instance, for each drainage area tab in the VRRM Compliance Spreadsheet), and a T_v for an individual BMP based on the contributing drainage area and/or volume from an upstream practice. These can be referred to as T_{vSITE} , T_{vDA} , and T_{vBMP} respectively.

It is important to note that the T_{vSITE} is the most important for overall compliance purposes, as it relates directly to computing the post-developed pollutant load and the corresponding load reduction required to meet the site-based TP load limit. Any adjustments to a Drainage Area tab land cover based on the site design BMP selection, i.e., the selection of a BMP such as *Sheetflow to a Vegetated Area or Open Space*, or preservation of open space or reforestation should also be reflected on the Site Data tab land cover, as this will reduce the overall site-based reduction requirement.

The T_{vBMP} is most important for sizing individual BMPs in accordance with the specifications, because each BMP is sized based on the T_v generated by the contributing drainage area (CDA) draining to that BMP.

Most of the BMP Design Specifications include a Level 1 and Level 2 design standard. The Level 1 standard generally requires a storage or treatment function sized for the T_v . The Level 2 design standard increases the T_v storage or treatment function sizing by a factor of 1.1, 1.25, or 1.5. This T_v multiplier is included in the BMP Design Specifications and was derived for each practice based on the available BMP performance data relative to the annual volume of runoff

treated. (Refer to the complete BMP Design Specifications posted on the Virginia Stormwater BMP Clearinghouse website at: <http://vwrrc.vt.edu/swc/>.)

The VRRM Tv is calculated by multiplying the 1-inch rainfall depth by the composite Rv based on the three site cover runoff coefficients: *Forest/Open Space* (F), *Managed Turf* (T), and *Impervious Cover* (I) present at the site, as shown in **Equation 11.7** below (CWP et al., 2008). This method generates a Tv of close to 1 inch for highly impervious sites and a gradually decreasing Tv for decreasing levels of imperviousness.

Equation 11.7 Stormwater Treatment Volume (Tv)

$$Tv = \frac{P \times [Rv_{composite}] \times SA}{12}$$

Equation 11.8 Composite Volumetric Runoff Coefficient ($Rv_{composite}$)

$$Rv_{composite} = (Rv_I \times \%I) + (Rv_T \times \%T) + (Rv_F \times \%F)$$

Where:

Tv	=	Stormwater treatment volume in acre feet
$Rv_{composite}$	=	Composite or weighted runoff coefficient
P	=	Depth of rainfall; “water quality” $P = 1$ -inch
Rv_I	=	Runoff coefficient for Impervious cover (Table 11.1)
Rv_T	=	Runoff coefficient for Turf cover or disturbed soils (Table 11.1)
Rv_F	=	Runoff coefficient for Forest/Open Space (Table 11.1)
$\%I$	=	Percent of site in Impervious cover (fraction)
$\%T$	=	Percent of site in Turf cover (fraction)
$\%F$	=	Percent of site in Forest/Open Space (fraction)
SA	=	Total site area, in acres

As discussed in **Terminology Alert Number 4** above, this computation can be for the site, a drainage area within the site, or an individual BMP drainage area.

Related to the discussion of CN in **Section 11.3.4** of this Chapter, another important terminology alert is provided here to emphasize the importance of proper land cover definitions associated with the VRRM:

NOTE: Terminology Alert Number 5 – TR-55 and the VRRM use the term Open Space differently:

- The VRRM considers *managed turf* to be equivalent to the TR-55 *open space*, that is: lawns, parks, golf courses, and cemeteries, with a CN equivalent to pasture/grassland in good hydrologic condition. This generally represents lawn areas that have been cleared and/or graded to accommodate development.

- The VRRM considers *Open Space* to be protected undisturbed (or restored) land comparable to *Forest* and equivalent to the TR-55 *woods in good hydrologic condition*; that is, wooded areas protected from grazing with ground litter and brush covering the soil.
- The VRRM definition of what can be considered *Forest/Open Space* is provided in **Table 12.1 of Chapter 12**, and includes land that will remain undisturbed OR that will be restored to a hydrologically functional state, as well as land that will be subject to minimal operational *and management* activities so as to **minimize the compaction of soils**, the application of fertilizers, and other impacts. In all cases, the designation of lands as *Forest/Open Space* will require some form of a permanent protective covenant, deed restriction, easement, or similar measure.

The designer should refer to **Chapter 4** of the *Blue Book* or, more appropriately TR-55 for a full explanation of the basis for the *CNs*, and **Table 12.1 of Chapter 12-** for *details and definitions* on how to qualify land cover for purposes of calculating the *Tv*.

11.4.4 The Simple Method

The Simple Method estimates the annual pollutant load exported in stormwater runoff from small urban catchments (Schueler, 1987). The Simple Method sacrifices some precision for the sake of simplicity and ease of use, but it is a reasonably accurate way to predict annual pollutant loads. The Simple Method as shown in **Equation 11.9** below was used to establish the site-based annual TP load limit of 0.41 lb/ac/yr (average natural load), and is also used to calculate the annual TP and TN loads of the site in its developed condition (Site Data tab of the VRRM Compliance Spreadsheet). The difference between these two TP values represents the site-based TP Load reduction requirement.

Equation 11.9 Simple Method Pollutant Load Calculation

$$L = P \times P_i \times Rv_{composite} \times C \times A \times 2.72/12$$

Where:

<i>L</i>	= total post-development pollutant load (pounds/ year)
<i>P</i>	= average annual rainfall depth (inches) = 43 inches for Virginia
<i>P_j</i>	= fraction of rainfall events that produce runoff = 0.9
<i>Rv_{composite}</i>	= composite volumetric runoff coefficient (Equation 11.8)
<i>C</i>	= flow-weighted event mean concentration (EMC) of TP (mg/L)
<i>A</i>	= area of the development site (acres)
12	= unit conversion factor: rainfall inches to feet
2.72	= unit conversion factor: L to ft ³ , mg to lb, and acres to ft ²

The VRRM Compliance Spreadsheet also calculates the pollutant load generated by the contributing drainage area to the selected BMPs (D.A. tabs). Refer to **Chapter 12** of this Handbook for an explanation of the VRRM Compliance Spreadsheet and the supporting calculations.

11.4.4.1 Total Phosphorus Event Mean Concentration

The Center for Watershed Protection (CWP) analyzed the National Stormwater Quality Database (NSQD) version 1.1 to compare Virginia with National Event Mean Concentrations (EMCs) derived for total nitrogen (TN), total phosphorus (TP), and total suspended solids (TSS). Statistical trends were examined for the EMCs based on land use (residential/non-residential) and physiographic province (Piedmont/Coastal Plain).

Based on the analysis, there is a statistically significant difference in pollutant concentrations in stormwater between residential and nonresidential sites, particularly for TN. In one sense, this could have been considered justification for using different EMCs for the two categories of land use. However, the designation of a land use category would also require a corresponding impervious cover in order to differentiate between high density residential and commercial, detached residential and campus commercial, etc. The distinction of the amount of impervious cover created unintended consequences, including hidden incentives to increase impervious cover to qualify for an easier compliance threshold, among other complications. This ultimately led to the selection of a single EMC standard for measuring compliance.

The review of Virginia piedmont and coastal plain residential and non-residential EMCs bracketed the existing standard of 0.26 mg/l as established by the Virginia Stormwater Management Program (CWP 2008). Therefore, the TP EMC for regulatory compliance remains 0.26 mg/l.

11.4.4.2 Site-Based Total Phosphorus Load Limit

The site-based load limit for TP was derived with the intention of establishing the allowable maximum TP load from developed lands that would meet the targets established in the Virginia Tributary Strategies. As the Chesapeake Bay Total Maximum Daily Load Watershed Implementation Plan (TMDL WIP) came to replace the earlier Virginia tributary strategies, the focus on setting this site-based load limit shifted towards identifying the land being converted to development. Several iterations of calculations were considered, each making different assumptions of the land conversions: the relative amount of forest and agricultural lands historically being converted to urban lands.

The Chesapeake Bay TMDL WIP initially identified that the allocation for nutrient loads from new developed lands would be based on achieving no increase above allowable 2025 average nutrient loads from previous land uses. The final TMDL Phase I WIP further refined the proposed load limit by establishing that the assumed “previous” or prior land uses of the proposed developed lands within Virginia’s Chesapeake Bay watershed would be assumed to be a mix of forest, cropland, pasture, and hay.

A Virginia Stormwater Management Regulatory Advisory Panel (RAP) was convened to analyze the various options previously considered, as well as propose new ones, for establishing a land-use based regulatory nutrient load limit for new development. The RAP considered several scenarios of land use conversion trends in the Chesapeake Bay watershed (WSSI, 2001a). Since the regulatory mandate was intended to apply statewide, the focus was adjusted to consider all of

Virginia and not just the Chesapeake Bay watershed. Ultimately the RAP elected to use the Impervious Cover Model (Schueler et al. 2009) to define the nutrient baseline upper limit as that generated by the amount of impervious cover that has been shown to impact the index of biotic integrity in streams: approximately 5% to 10% small watershed imperviousness. Since the VRRM also identifies the other land covers associated with urban development as sources of TP, the RAP also had to designate the base-line upper limit land cover for the balance of the developed site: *managed turf* and *forest/open space* and the corresponding soil types (since the VRRM runoff coefficients are adjusted for hydrologic soil groups).

The final consensus of the RAP was to define the target site-based load limit from newly developed lands as **0.41 lb/ac/yr**, computed using the VRRM for typical land cover as follows:

Impervious cover = 10%
 Forest/Open Space = 60%
 Managed Turf = 30%

The assumed soil types for each land cover were estimated from the from STATSGO state-wide soils database soils breakdown for Virginia outside of the Chesapeake Bay Watershed:

HSG A:	1.15%	HSG C:	28.60%
HSG B:	61.28%	HSG D:	8.97%

11.5 WATER QUALITY CALCULATIONS

Water quality calculations include the steps of calculating the pollutant loading from the developed site (**Equation 11.9**), and developing a combined strategy of site design and BMP implementation that reduces the calculated pollutant load to the required load limit of 0.41 lb/ac (**Equation 11.10**). The selection and design of various site design and BMP strategies can be tested using the VRRM Compliance spreadsheet. The basis of the VRRM is the use of site design strategies that increase runoff abstraction and the implementation of stormwater BMPs that include retention storage to reduce the volume of runoff discharging from the site as a pathway to reduce pollutant loads. Additional pollutant load reduction can be achieved with BMPs that do not necessarily retain runoff. The volume and pollutant reduction credit is combined as a percent reduction and applied to the calculated pollutant load (**Equation 11.9**) to demonstrate compliance with the site based load limit. **Equation 11.10** provides the computation for the pollutant load reduction requirement. The BMP implementation strategy must achieve a total load reduction (runoff volume reduction plus pollutant removal) efficiency to achieve the required reduction.

Equation 11.10: Water Quality Pollutant Load Reduction Requirement

$$L_{reduction} = L_{postdevelopment} - (0.41 \text{ lb/ac/yr}) \times A$$

Where:

$L_{reduction}$	= load reduction requirement (lb)
$L_{postdevelopment}$	= postdevelopment pollutant load (Equation 11.9)
0.41 lb/ac/yr	= site based TP load limit
A	= drainage or site area (acres)

11.5.1 General Considerations: Stormwater Retention vs. Detention

The definition of retention storage implies infiltration, evapotranspiration, or use (as in rainwater harvesting). The most common example of retention is infiltration. However, the physical ability to infiltrate runoff into the native soil horizon is limited by the permeability of the native soil. While runoff will naturally seep into even hydrologically limited soils (such as HSG C and D soils) if given enough time, the typical stormwater management strategy of conveying the runoff from a developed drainage area to a comparatively small area designated for infiltration is limited by the hydrologic and hydraulic loading of the soils. In other words, relying on infiltration in marginal soils (i.e., with low permeability) as a long term stormwater retention strategy, even when implementing uniformly distributed micro-scale practices, is highly dependent on adequate soil permeability in order to meet requirements for long term performance.

The challenge of ensuring that the operational life of retention BMPs is comparable to that of the other site infrastructure is best addressed during design. Many designers elect to forego infiltration (unless the soils are verified as highly permeable, and the site is relatively clean, i.e., low traffic and minimal particulate pollutant loads) and instead select practices that include an underdrain.

The popularity of bioretention as a stormwater practice can be partially attributed to its effectiveness in providing the function of retention through the engineered soil media, along with the biological uptake and evapotranspiration through the plantings, even with an underdrain³. The Level 1 and some Level 2 practices that incorporate an underdrain provide varying degrees of volume reduction credit. Some credit is derived from the internal water storage within the soil matrix where the volume of runoff is held for an extended period (and either released by the plants via evapotranspiration or eventually drained by the underdrain) and the Level 2 credit is partially attributed to the potential for infiltration at the bottom of the practice (infiltration sump). Research indicates that the delayed discharge from bioretention cells is statistically similar to storm flow reaching streams via interflow in undeveloped watersheds (DeBusk et al. 2011).

These results suggest that a bioretention cell with an underdrain processes stormwater and delivers it to the receiving stream in a manner comparable to an undeveloped watershed, particularly in watersheds that don't exhibit naturally high levels of infiltration. As such, the retention credit is applied to practices with an underdrain based on mimicking the pre-development hydrologic characteristics of interflow. **Section 8.1 of Chapter 8** provides

³ The Level 2 Bioretention design includes a provision for establishing a sump beneath the underdrain in order to achieve Level 2 performance even with an underdrain.

additional research and supporting documentation for the various runoff volume reduction mechanisms, including evapotranspiration.

Another distinction between retention and detention is the availability of storage for additional runoff over an extended storm event. It should be expected that, once filled, the traditional retention storage is no longer available to capture additional runoff volume. For storm events greater than 1 inch or consecutive rain events with a short interval, runoff will likely bypass the practice; whereas practices with underdrains will likely have some storage capacity available as runoff is leaving the system over the course of the storm. This results in treatment of more volume than the static design storage. This might seem to be contrary to the statements above regarding retention; however, it actually is consistent with how an undeveloped watershed processes stormwater as the soils begin to saturate, creating more runoff.

11.5.2 BMP Sizing Using the VRRM Treatment Volume

The VSMP regulations require an *annual* pollutant load reduction. To achieve this performance goal, the 90th percentile rainfall depth of 1 inch was selected as the design storm for sizing BMPs. The rationale for using the 90th percentile event is that it represents the majority of runoff volume on an annual basis, and that targeting larger events would not be cost effective in terms of BMP implementation. The upward inflection of the rainfall depth-frequency curve at the 90% mark (**Chapter 10, Figure 10.3**) indicates that BMPs would be required to be increasingly larger and more expensive for every incremental increase in rainfall depth above 1 inch. However, targeting the first 1-inch rainfall depth still provides partial treatment for water quality and quantity protection for these larger storms. **Chapter 10** provides a thorough explanation of the choice of the 1-inch rainfall depth as the water quality design storm.

The Post-Development T_v (**Equation 11.7**) is computed in the VRRM Compliance Spreadsheet:

1. On the Site Data tab for the entire site (T_{vSITE});
2. For each drainage area on the D.A. tabs (T_{vDA}); and
3. For each BMP selected in the D.A. tab, based on the Credit Area of *turf acres* and *impervious acres* draining to the practice (T_{vBMP}). **This is the T_v that is used to size the BMP.**

The T_{vBMP} used to size the BMP (item 3 above), **is not summed for the designer in the VRRM Compliance Spreadsheet**. Rather, the designer has to determine the design T_{vBMP} by summing the Runoff Reduction (D.A. tab Column I) and the Remaining Runoff Volume (D.A. tab Column J). This sum also includes the additional runoff volume (if any) delivered from an upstream practice (Column H). Or the designer may use **Equation 11.7** to compute the volume independent of the spreadsheet.

Example T_v determination: The following example illustrates the determination of the T_{vBMP} from the D.A. tab of the VRRM Compliance Spreadsheet.

Step 1: Consider a drainage area of 2.5 acres within a larger development site:

Drainage Area Land Cover data input cells:

Drainage Area A Land Cover (acres)						
	A soils	B Soils	C Soils	D Soils	Totals	Land Cover Rv
Forest/Open Space (acres)	0.00	0.00	0.50	0.00	0.50	0.04
Managed Turf (acres)	0.00	0.00	0.75	0.00	0.75	0.22
Impervious Cover (acres)	0.00	0.00	1.25	0.00	1.25	0.95
				Total	2.50	

Post Development Treatment Volume (cf)	4,982
---	-------

Step 2: Determine the contributing drainage area of Managed Turf and Impervious cover to a selected BMP. Any area of *Forest/Open space* to the BMP is not applied to BMP sizing (this is intended to avoid the need to construct BMPs to manage runoff from *Forest/Open Space*, it also serves as an incentive to avoid impacting forested areas, and to protect or restore new open space areas).

Select Bioretention Level 1:

Treat all the impervious acres [1.25 ac (row 46, column G)]; and all the turf acres [0.75 ac (cell G47)]

Treatment Volume (T_{VBMP}) to Bioretention Level 1:

Sum of cells I46 and I47 (Runoff Reduction: 1,724 + 240) & J46 and J47 (Remaining Runoff Volume: 2,586 + 359) = **4,909 ft³**

Total Area Treated (cells G71 and G72) = 1.25 ac impervious, 0.75 ac turf

Bioretention Level 1 is treating 2.0 acres, and is sized based on a contributing T_{VBMP} of **4,909 ft³**.

This example can also illustrate how the design T_{VBMP} being directed to the Bioretention BMP is reduced when the contributing drainage area, or a portion thereof, is directed to a runoff reduction BMP prior to the Bioretention area. In this case, an **Alternate Scenario** includes Permeable Pavement Level 1 to treat a portion of the parking runoff prior to discharging to Bioretention.

Alternate Scenario:

Step 1: Manage some of the parking runoff (0.75 ac of the 1.25 acre of impervious) with Permeable Pavement Level 1; and direct the remaining runoff to a downstream Bioretention Level 1 practice (that will also treat the remaining impervious area and all the turf acres – **Step 2** below).

Select Permeable Pavement Level 1:

Implement 0.75 acres of permeable pavement [0.75 ac (cell G28)];

Treatment Volume (T_{VBMP}) to Permeable Pavement L1:

Sum of cell I28 (Runoff Reduction: 1,164) & J28 (Remaining Runoff Volume: 1,423) = **2,587 ft³**

Select Bioretention Level 1 as Downstream Treatment to be Employed (column P).

Step 2: Select Bioretention L1: Treat the remaining impervious acres [$1.25 - 0.75 = 0.5$ ac (cell G46)]; and all the turf acres [0.75 ac (cell G47)] with Bioretention L1.

Treatment Volume (T_{VBMP}) to Bioretention L1:

Sum of cells I46 and I47 (Runoff Reduction: $1,259 + 240$) & J46 and J47 (Remaining Runoff Volume: $1,888 + 359$) = **3,746 ft³** (reduction of approximately 24% of the required Bioretention T_v).

The total T_{VBMP} includes 1,423 ft³ of Volume from Upstream RR Practice (cell H46)

Total Area Treated (cells G71 and G72) = 1.25 ac impervious, 0.75 ac turf.

The same acreage is treated, however the design treatment volume to the Bioretention Level 1 is reduced, and the overall pollutant load reduction performance is increased by using an upstream practice to create a volume reduction treatment train.

11.5.2.1 Annual Volume and Pollutant Load Reduction Credit

The VRRM Compliance Spreadsheet is a BMP selection and *compliance* tool – not a BMP design tool. It provides a common language and allows for cross-checking between designers and plan reviewers. The discussion above illustrates how the spreadsheet will provide valuable information regarding BMP sizing and design. It is important to note that, when a BMP such as Bioretention is selected, the spreadsheet does not include a sizing or “*storage volume provided*” function. As such, the *annual* volume and pollutant load reduction computation does not reflect BMP sizing; the spreadsheet assumes that the BMP has been sized according to the BMP Design Specifications, and awards the annual volume reduction credit accordingly. There is no increase in the annual volume or pollutant load reduction (other than that awarded for Level 2) since there is no supporting data for the load reductions associated with the small number of storms that represent the largest 10% of the annual rainfall events.

Similarly, the quantity control credits that are applied to the *CN* adjustment calculations on the Spreadsheet’s Channel and Flood Protection tab do not reflect instances of increased storage. The Curve Number adjustment represents the blending of *annual* volume reduction and *single-event* modeling in the VRRM. The intent is to provide a practical and easy-to-use compliance tool, and not a design tool (which would be significantly more complex and likely not a spreadsheet based application).

NOTE: BMPs can be designed with additional storage volume above the required Level 1 or Level 2 design T_v . **However, sizing must still be in accordance with the BMP Specifications, and the *annual* volume and *annual* pollutant load**

reduction credit is not influenced by any increase in the sizing. The regulated pollutant load reduction credits itemized in the BMP Design Specifications are annual values, and compliance with the VSMP regulations are based on annual load reductions.

As noted above, the VRRM Compliance Spreadsheet does not incorporate BMP sizing into the Curve Number adjustment when providing the volume credit towards quantity control requirements. If the designer wishes to use an oversized runoff reduction and/or water quality protection practice to achieve additional storage credit towards quantity control requirements, the calculations demonstrating the value of that additional volume must be performed independent of the VRRM compliance spreadsheet (such as a hydrologic or routing program). In other words, the spreadsheet will only compute the *CN* adjustment based on the annual volume reduction credit for a properly sized BMP.

11.5.2.2 BMP Design Volume

The sizing of Runoff Reduction BMPs will either include a storage volume or a surface area or other element that is created to accommodate the design T_{VBMP} according to the various BMP Design Specifications. It is important to recognize that most BMPs incorporate a surface area design feature that, while not the primary sizing factor, is a critical design feature for ensuring BMP performance and longevity. This combined design element is identified in column 4 of **Table 11.2**.

An example of combined design elements the Bioretention specification, where the design is focused on providing an adequate total storage volume and surface area within the practice. This includes the storage volume elements of surface ponding volume within the soil media and gravel layers, and the additional requirement of establishing a minimum surface area in order to effectively manage the incoming volume and peak rate of runoff.

Table 11.2. Primary BMP Sizing, Design, and Compliance Features

BMP		Runoff Reduction and/or Pollutant Removal Credit Based on Storage Volume ¹	Runoff Reduction and/or Pollutant Removal Credit Based on Surface Area ²	Design Criteria include both Storage Volume & Surface Area Components ³
Sheet Flow to Conservation Areas			✓	
Sheet Flow to Vegetated Filter Strips			✓	
Simple Disconnection			✓	
Simple Disconnection with Compensatory Practices	Micro-Infiltration	✓		✓
	Residential Rain Garden	✓		✓
	Rainwater Harvesting	✓		

	Urban Planter	✓		✓
Bioretention		✓		✓
Permeable Pavement		✓		✓
Grass Swale		✓		✓
Infiltration		✓		✓
Rainwater Harvesting		✓		
Vegetated Roof		✓		✓
Filtration		✓		✓
Extended Detention		✓		✓
Stormwater Wetlands			✓	✓
¹ Minimum design criteria for storage volume.				
² Minimum design for surface area of the practice.				
³ Minimum design criteria include storage volume and surface area design features.				

11.5.3 Water Quality Design T_v Peak Flow Rate

The peak flow rates for the 1-year 24-hour storm and larger storms are readily computed using accepted hydrologic methods outlined in this chapter. However, there has not been a standard method for computing the water quality design peak flow rate. The water quality design peak flow rate is needed for the design and sizing of pretreatment cells, level spreaders, by-pass diversion structures, overflow riser structures, grass swales and water quality swale geometry, etc. All require a peak rate of discharge in order to ensure non-erosive conditions and flow capacity.

Of the hydrologic methods available, the Rational Formula is highly sensitive to the time of concentration and rainfall intensity, and therefore should only be used with reliable Intensity-Duration-Frequency (IDF) curves (or B, D, & E factors discussed in **Section 11.3.1** on page 11-9 above) for the rainfall depth and region of interest (Claytor and Schueler, 1996). Unfortunately, there are no IDF curves or B, D, & E factors available for the 1-inch rainfall depth. The NRCS *CN* methods are very useful for characterizing complex sub-watersheds and drainage areas and estimating the peak discharge from large storms (greater than 2 inches), but can significantly underestimate the discharge from small storm events (Claytor and Schueler, 1996). Since the T_v is based on a 1-inch rainfall, this underestimation of peak discharge can lead to undersized diversion and overflow structures, resulting in a significant volume of the design T_v potentially bypassing the runoff reduction practice. Undersized overflow structures and outlet channels can cause erosion of the BMP conveyance features which can lead to costly and frequent maintenance.

In order to maintain consistency and accuracy, the following Modified *CN* Method is recommended to calculate the peak discharge for the 1-inch rain event. The method uses the Small Storm Hydrology Method (Pitt, 1994) and NRCS Graphical Peak Discharge Method (USDA, 1986) to provide an adjusted Curve Number that is more reflective of the runoff volume from impervious areas within the drainage area. The design rainfall is a NRCS Type II distribution, so the method incorporates the peak rainfall intensities common in the eastern United States. The time of concentration is computed using the method outlined in TR-55.

The following provides a step by step procedure for calculating the Water Quality Treatment Volume's peak rate of discharge, q_{pTv} :

- Step 1:** Calculate the adjusted CN for the site or contributing drainage area. The following equation is derived from the NRCS CN Method and is described in detail in the Part 630 (Hydrology) of the NRCS National Engineering Handbook:

Equation 11.11 Derivation of NRCS Curve Number and Runoff Equation

$$CN = \frac{1000}{[10 + 5P + 10Q_a - 10(Q_a^2 + 1.25Q_aP)^{0.5}]}$$

Where:

- CN = Adjusted curve number
 P = Rainfall (inches), (1.0" in Virginia)
 Q_a = Runoff volume (watershed inches), equal to $Tv \div \text{drainage area}$

Note: When using a hydraulic/hydrologic model for sizing a runoff reduction BMP or calculating the q_{pTv} , designers must use this modified CN for the drainage area to generate runoff equal to the Tv for the 1-inch rainfall event.

- Step 2:** Compute the Time of Concentration (T_c) for the site or drainage area. **Chapter 4** of the *Blue Book* and Chapter 3 of TR-55 (Time of Concentration and Travel Time) provide detailed procedures for computing the T_c . The designer should select the T_c flow path that is representative of the impervious cover. .
- Step 3:** Calculate the Water Quality Treatment Volume's peak discharge (q_{pTv})
 The (q_{pTv}) is computed using the following equation and the procedures outlined in Chapter 4 (Graphical Peak Discharge Method) of TR-55.

Equation 11.12. Modified NRCS TR-55 Eq. 4-1

$$q_{pTv} = q_u \times A \times Q_a$$

Where:

- q_{pTv} = Treatment Volume peak discharge (cfs)
 q_u = unit peak discharge (cfs/mi²/in)
 A = drainage area (mi²)
 Q_a = runoff volume (watershed inches = Tv/A)

Designers can also use WinTR-55 or an equivalent TR-55 spreadsheet to compute (q_{pTv}):

- Read the initial abstraction (I_a) from TR-55 Table 4.1 or calculate it using $I_a = 200/CN - 2$

- Compute I_a/P ($P = 1.0$);
- Read the Unit Peak Discharge (q_u) from exhibit 4-II using T_c and I_a/P ;
- Compute the (q_{pTv}) peak discharge:

This procedure is for computing the peak flow rate for the 1-inch rainfall event. All other calculations of peak discharge from larger storm events for the design of drainage systems, culverts, etc., should use published CNs and computational procedures.

11.5.4 On-Line and Off-Line BMPs

Runoff Reduction BMPs are typically sized and designed to manage the design treatment volume from the 1-inch rainfall event. In some cases designers may choose to manage or detain a larger storm event in order to partially or fully meet the quantity control requirements. In all cases, the designer must account for the conveyance of these larger storms *through* the BMP (the BMP is said to be **On-Line**) or *around* the BMP (making the BMP **Off-Line**).

Using the water quality design T_v peak flow rate described in **Section 11.5.3** above, the designer can size a bypass control for an *On-Line* BMP, such that flows that exceed the design capacity exit via an internal riser structure or weir overflow. This means that the BMP accepts all the runoff from the contributing drainage area and the overflow is within the BMP (or main treatment area). On-line BMPs must be carefully designed to accommodate the large storm design peak flow rate in terms of inflow velocity and energy, as well as an adequately sized overflow to allow the runoff to safely exit the BMP.

On-line systems in these cases will require careful design and construction to ensure adequate conveyance of the large storm inflow.

On-line systems should include the following:

- Inflow points should be protected from erosive velocity;
- An overflow structure must be provided within the practice to pass storms greater than the design storm storage to a stabilized conveyance or storm sewer system;
- Discharge from the overflow structure should be controlled so that velocities are non-erosive at the outlet point;

The overflow structure type and design should be scaled to the application – this may be a landscape grate or yard inlet for small practices or a commercial-type structure for larger installations.

Alternately, an *Off-Line* BMP design uses an external diversion structure to manage the large storm flow so the runoff in excess of the 1-inch rain event will not damage the BMP (excessive velocity or ponding depth) or re-suspend and export previously trapped pollutants. This can be accomplished through a low-flow diversion structure that channels the smaller storm flow volume into the BMP, while forcing the larger flows to bypass the BMP. These types of low-flow diversions or large storm bypass structures are external – thereby diverting the flow before it gets to the BMP – or they can be part of the BMP inlet structure, such as a forebay or level spreader. In some cases, off-line BMPs with a storage volume can be located so that once the

storage volume is full, additional runoff simply diverts past or around the BMP. **Figure 11.4** below illustrates a simple off-line BMP.

Off-line designs require that the designer determine the runoff peak flow rates for the range of design storms: 1-inch rainfall depth, and 1-year, 2-year, and 10-year 24-hour storms, as needed. Off-line designs are usually the preferred option for volume reduction BMPs, especially where larger drainage areas (e.g., greater than 0.5 to 1 acre) are conveyed by a pipe or armored drainage system.

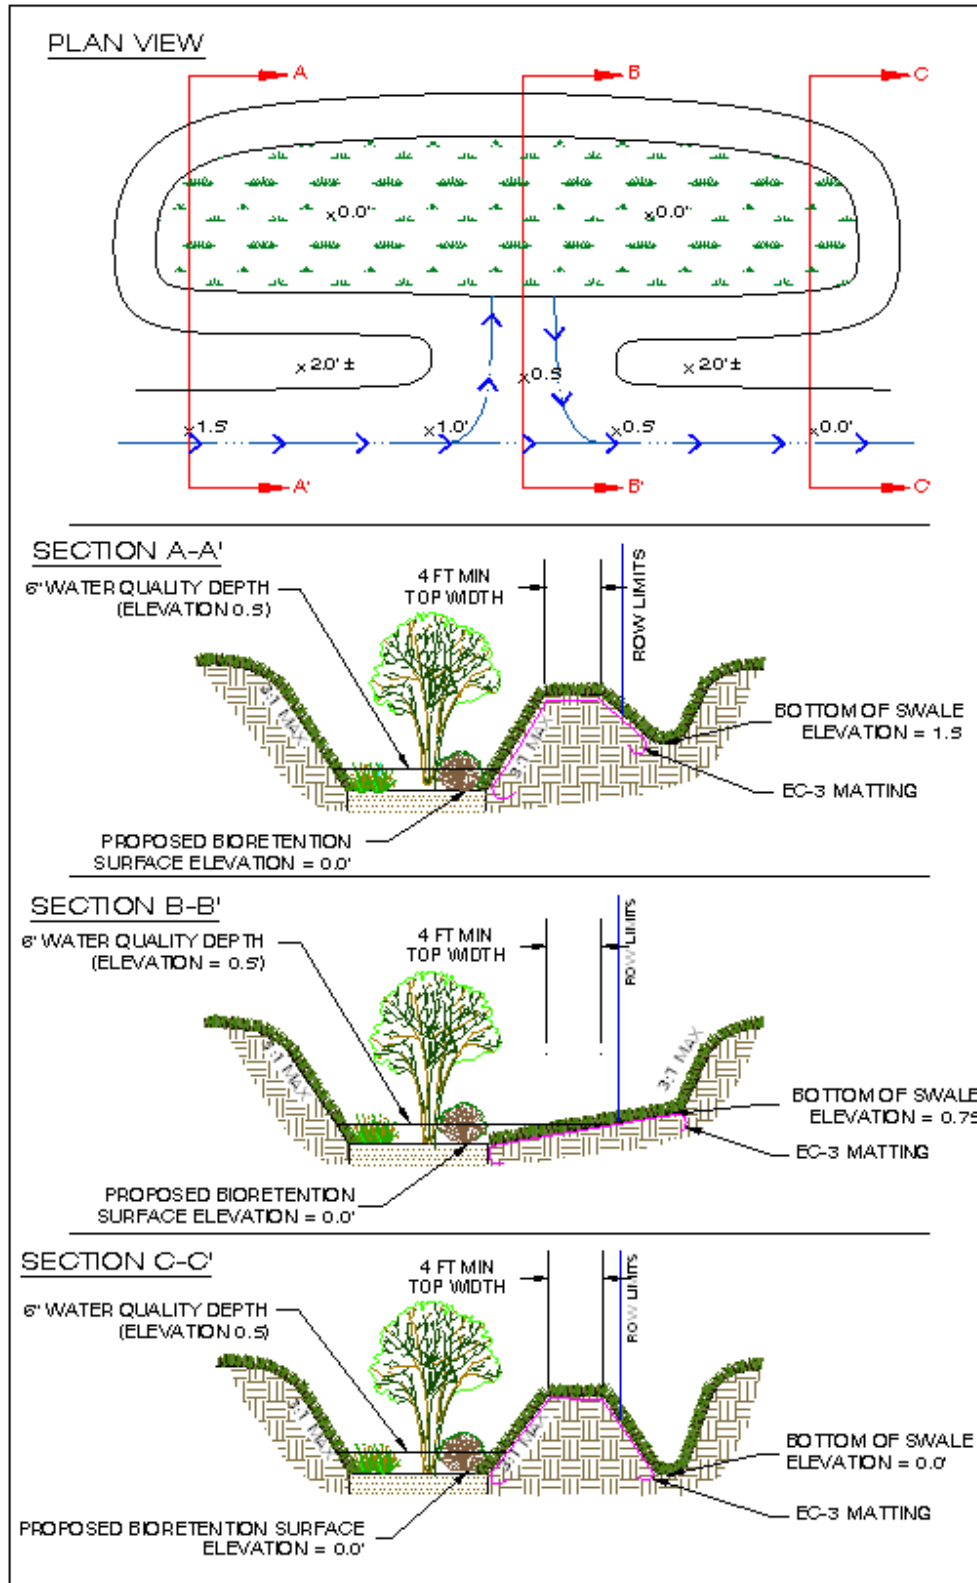


Figure 11.4. Simple Off-Line BMP

11.6 WATER QUANTITY CONTROL

The water quantity control requirements of the VSMP regulations have evolved as described in **Section 10.1.3 of Chapter 10** of this Handbook. The VSMP regulations divide the quantity control requirements into Channel Protection criteria and Flood Protection criteria.

With the adoption of the new VSMP regulations, there is a possibility for confusion, since there are multiple active performance criteria and technical requirements for channel protection currently in place, as follows:

1. **Minimum Standard 19** of the Erosion and Sediment Control Regulations (**9 VAC 25-840-40.19**). This criterion is currently applied statewide on all regulated land disturbing activities.
2. Stream channel erosion provisions (**9 VAC 25-870-97**) of Part II.C of the VSMP regulations. This criterion is currently applied on all regulated land disturbing activities in jurisdictions that implement the VSMP regulations as adopted in 1999. This provision requires compliance with either Minimum Standard 19 or an alternate 1-year 24-hour storm extended detention standard. This standard may also apply to “grandfathered” development projects as defined by the VSMP regulations and determined by the VSMP authority.
3. Stream channel erosion provisions of **§62.1-44.15:28.4 A 7** of the *VSMA* and **§62.1-44.15:52 A** of the *VESCL*. This criterion was originally adopted in 2004 as a “safe harbor” for development projects that proposed a stormwater discharge to an eroded channel. The “safe harbor” was considered necessary to address a provision in Minimum Standard 19 that requires that all stormwater discharges must be to an adequate channel (and an eroded channel was considered, by definition, to be *not* adequate, regardless of on-site detention or volume reduction).

Implementation of the criterion of this “safe harbor” provision outlined below *exempts the applicant from any flow rate capacity and velocity requirements for natural or man-made channels as defined in any regulations promulgated pursuant to the Virginia SWM or ESC laws and associated regulations.*

The technical criterion of this “safe harbor” provision includes:

- i) *Detain the **water quality volume** and release it over 48 hours;*
- ii) *Detain and release over a 24-hour period the expected rainfall resulting from the **one year, 24-hour storm**; and*
- iii) *Reduce the allowable peak flow rate resulting from the **1.5, 2, and 10-year, 24-hour storms** to a level that is less than or equal to the peak flow rate from the site assuming it was in a good forested condition, achieved through multiplication of the forested peak flow rate by a reduction factor that is equal to the runoff volume from the site when it was in a good forested condition divided by the runoff volume from the site in its proposed condition.*

This criterion provided the groundwork for the development and ultimate adoption of the Channel Protection criteria in **9 VAC 25-870-66** of the current VSMP regulations (VSMP Channel Protection Criteria). The intention is to eventually replace the MS-19 provisions of the

Erosion and Sediment Control Regulations with the VSMP Channel Protection Criteria (item 2 above) in an effort to have a single technical standard for stream channel protection. It is also expected that the “safe Harbor” provisions will be eliminated since the VSMP Channel Protection Criteria addresses the storms that are considered to cause most of the channel erosion without the unnecessarily large storage volumes required to address the larger and less frequent storms.

Therefore, this section will only cover the provisions of the VSMP Channel Protection Criteria. Information on compliance with MS-19 criterion can be found in the **Chapter 5** of the *Blue Book*, and the information provided here, in addition to the hydraulic calculations in **Chapter 5** of the *Blue Book*, should be sufficient for applicants interested in implementing the “safe harbor” criteria.

11.6.1 VSMP Channel Protection Criteria

The VSMP Channel Protection Criteria establish the requirements for discharges of stormwater to one of three types of channels, specifically referred to as “*Stormwater Conveyance Systems*” which are defined in the VSMP regulations (**9 VAC 25-870-10**) as a combination of drainage components that are used to convey stormwater discharge, either within or downstream of the land-disturbing activity as follows:

- (i) *"Manmade stormwater conveyance system" means a pipe, ditch, vegetated swale, or other stormwater conveyance system constructed by man except for restored stormwater conveyance systems;*
- (ii) *"Natural stormwater conveyance system" means the main channel of a natural stream and the flood-prone area adjacent to the main channel (**Note:** emphasis added); or*
- (iii) *"Restored stormwater conveyance system" means a stormwater conveyance system that has been designed and constructed using natural channel design concepts. Restored stormwater conveyance systems include the main channel and the flood-prone area adjacent to the main channel.*

The following are excerpts from the VSMP Channel Protection Criteria (**9 VAC 25-870-66 B**):

1. **Manmade Stormwater Conveyance System (9 VAC 25-870-66 B 1).** *When stormwater from a development is discharged to a manmade stormwater conveyance system, following the land-disturbing activity, either:*
 - a. *The Manmade Stormwater Conveyance system shall convey the post-development peak flow rate from the two-year 24-hour storm event without causing erosion of the system. Detention of stormwater or downstream improvements may be incorporated into the approved land-disturbing activity to meet this criterion, at the discretion of the stormwater program administrative authority; or*
 - b. *The peak discharge requirements for concentrated stormwater flow to natural stormwater conveyance systems in subsection 3 (Natural Stormwater Conveyance Systems) shall be met.*

Subdivision (a) indicates that a stormwater detention system may be incorporated into the site design such that the outflow does not cause erosion of the system. A manmade conveyance system can consist of various channel lining materials that will have different maximum allowable velocities: grass, grass with permanent stabilization matting, rip rap, or other material. The VESCH (latest edition) provides information on the allowable velocity for various natural materials. The designer should refer to manufacturer specifications for manufactured permanent or temporary stabilization products.

NOTE: Temporary stabilization products are intended to temporarily support the soil and vegetative growth until full stabilization is achieved. However, the design must address the occurrence of erosive peak flows prior to the establishment of the vegetation.

Subsection (b) refers to a new version of a “safe harbor”, meaning the designer can choose to implement the criteria required in item 3 of this section and that is deemed adequate to meet the criteria for any downstream conveyance system.

2. ***Restored Stormwater Conveyance Systems (9 VAC 25-870-66 B 2).*** *When stormwater from a development is discharged to a restored stormwater conveyance system that has been restored using natural design concepts, following the land-disturbing activity, either:*
 - a. *The development shall be consistent, in combination with other stormwater runoff, with the design parameters of the restored stormwater conveyance system that is functioning in accordance with the design objectives; or*
 - b. *The peak discharge requirements for concentrated stormwater flow to natural stormwater conveyance systems in subsection 3 shall be met.*

This standard requires that the designer verify that the restored stormwater conveyance system was designed to accommodate the stormwater discharge from the subject development, as well as “other stormwater runoff”, meaning the discharges from other new or existing developments. The primary goal is to ensure that the restored stormwater conveyance system is adequate and will not be impacted by the new stormwater discharge.

Similar to subsection 1, a stormwater detention system may be incorporated into the site design so that the outflow does not exceed the design capacity of the restored system for the designated design storms. Also similar to subsection 1, the safe harbor provision of compliance with criteria of subsection 3 is available if the discharge is not consistent with the design parameters of the restored system.

3. ***Natural Stormwater Conveyance Systems (9 VAC 25-870-66 B 3).*** *When stormwater from a development is discharged to a natural stormwater conveyance system, the maximum peak flow rate from the one-year 24-hour storm following the land-disturbing activity shall be calculated either:*
 - a. *In accordance with the following methodology:*

$$Q_{Developed} \leq I.F. * (Q_{Pre-developed} * RV_{Pre-Developed}) / RV_{Developed}$$

*Under no condition shall $Q_{Developed}$ be greater than $Q_{Pre-Developed}$ nor shall $Q_{Developed}$ be required to be less than that calculated in the equation $(Q_{Forest} * RV_{Forest})/RV_{Developed}$;*

Where:

I.F. (Improvement Factor) equals 0.8 for sites > 1 acre or 0.9 for sites \leq 1 acre.

$Q_{Developed}$ = allowable peak flow rate of runoff from the developed site.

$RV_{Developed}$ = volume of runoff from the site in the developed condition.

$Q_{Pre-Developed}$ = peak flow rate of runoff from the site in the pre-developed condition.

$RV_{Pre-Developed}$ = volume of runoff from the site in pre-developed condition.

Q_{Forest} = peak flow rate of runoff from the site in a forested condition.

RV_{Forest} = volume of runoff from the site in a forested condition; or

- b. In accordance with another methodology that is demonstrated by the VSMP Authority to achieve equivalent results and is approved by the board.*

The criterion for this subsection has been referred to as the “Energy Balance” method. While technically not “energy”, the use of the peak discharge ($Q_{Developed}$) and the volume ($RV_{Developed}$) of the post-development runoff attempts to address the impact of the increased erosive energy of the stormwater runoff caused by the increase in peak discharge *and* volume of runoff. [The increased volume of runoff released from the development site results in a longer duration of discharge. Incorporating the time function associated with the increased volume more accurately reflects the “power” of the runoff discharging from the site in its developed condition, rather than energy (WSSI 2011b)]. This also establishes the framework for incorporating the volume reduction credit applied to the water quality T_v .

Figure 11.5 represents the theoretical discharge hydrographs in the post-development condition, as provided to the VSMP regulation Regulatory Advisory Panel (RAP). The *Post-development Conventional SWM* peak rate of discharge has been throttled down with a detention facility to replicate the peak discharge of the pre-development condition; however, the volume of runoff (the area under the runoff curve) is significantly greater than that of the pre-development condition. Thus the product of the peak rate and the volume is greater than that of the pre-development condition. The *Post-development Energy Balance* discharge hydrograph reflects a significantly reduced peak discharge to compensate for the increased volume. As such, the basis of the Energy Balance is to achieve the goal of the post-development “energy” being equal to (or less than) the pre-development energy. The “energy” for the purposes of the VSMP regulation is defined as the peak flow rate multiplied by the volume of runoff. The “energy balance” of the pre- and post-development condition is defined as follows:

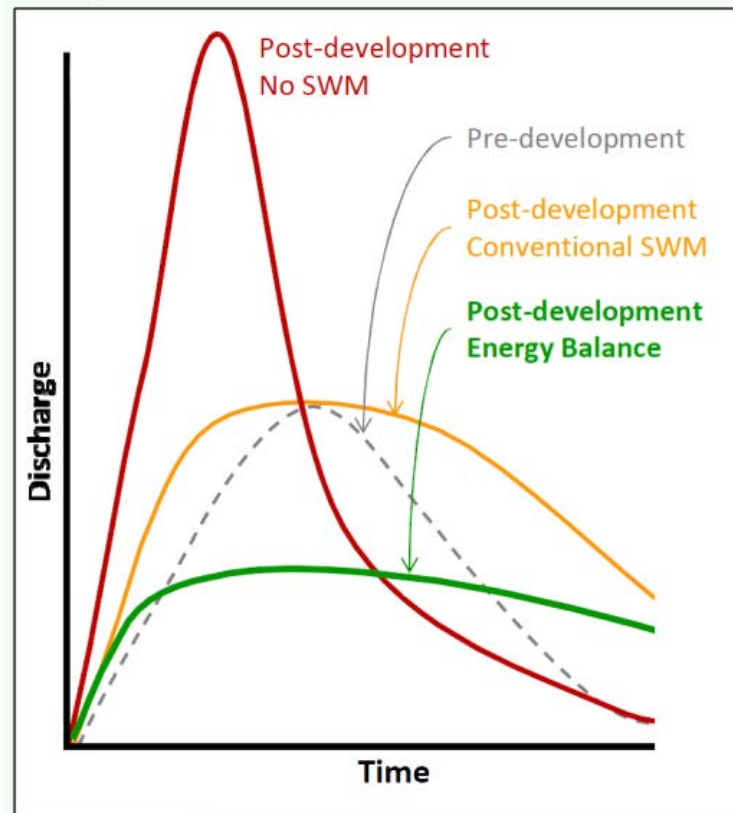


Figure 11.5. Theoretical Runoff and Discharge Hydrographs (Source: WSSI 2011b)

Equation 11.13. “Energy” Balance of Pre- and Post-Development Runoff Conditions

$$\text{Developed Condition Runoff (Peak Flow Rate * Volume)} \leq \text{Pre-Developed Condition Runoff (Peak Flow Rate * Volume)}$$

Rearranging **Equation 11.13** to solve for the allowable *Developed Condition Runoff Peak Flow Rate* yields a reduction in the developed peak flow rate that is inversely proportional to the increase in runoff volume (**Equation 11.14** below).

In order to facilitate the NRCS *CN* computational methods, the terminology of the Energy Balance Method as expressed in Item 3 above (**9 VAC 25-870-66.B.3**) must be reviewed.

NOTE: Terminology Alert #6 – Section 11.3.4 of this chapter identifies some of the terms that should be used with caution so as to not misrepresent any of the hydrologic parameters. This warning expands that caution to include the terminology of the VSMP Channel Protection Criteria. The term *Q* for the pre- and post-development conditions as defined in **9 VAC 25-870-66 B 3** is inconsistent with the traditional nomenclature of the NRCS Runoff Equation. All the related values are summarized in **Table 11.3** below. Unfortunately, the various computational methods use similar (and in some cases identical) terms to represent very different parameters. Designers should be very careful to ensure

the proper value (and corresponding unit) are being used for each designated parameter.

Table 11.3. Hydrology Terminology

Description	Units	Term
NRCS TR-55		
Runoff Depth	inches (in)	Q
Runoff Volume	cubic feet (ft ³) or acre feet (ac.ft.)	V_r
Storage Volume	cubic feet (ft ³) or acre feet (ac.ft.)	V_s
Peak Discharge	cubic feet per second (cfs)	q_p
VRRM Treatment Volume Runoff Coefficients		
Unit-less Volumetric Runoff Coefficients		R_v
VRRM Curve Number Adjustment		
Runoff Depth	inches	RV
VSMP Regulations Channel Protection Criteria (4VAC50-60-66.B)		
Runoff Volume*	cubic feet (ft ³) or acre feet (ac.ft.)*	RV
*Units of volume in the VSMP regulations Channel Protection Criteria can also be expressed in terms of <i>watershed-inches</i> or inches (consistent with Runoff Depth as expressed in the VRRM <i>CN</i> adjustment.		

The VSMP regulation Channel Protection Criteria (or *Energy Balance Method*) defined in **4 9 VAC 25-870-66 B 3** and as expressed in narrative terms in **Equation 11.13** above is re-defined in **Equation 11.14** below, using the terminology of the NRCS TR-55 Runoff Equation as provided in **Table 11.3**, in order to maintain consistency with the traditional hydrologic nomenclature.

Another modification is the simplification of the Energy Balance Method term for the runoff volume. The ratio of the pre- and post-development condition runoff *volume* is more readily expressed as the ratio of pre- and post-development *runoff depth*. Both terms yield the same ratio, however the use of the runoff depth (this value is represented by **Q** in the NRCS terminology, and **RV** in the VRRM) greatly simplifies the computation and also facilitates the Curve Number adjustment: the term for the runoff depth, **Q** (or **RV**), measured in inches, is a readily determined parameter in computing the TR-55 Graphical Peak Discharge, **q_p**. The Runoff Depth, **Q**, (or **RV**) is a function of rainfall and the drainage area *CN*, and can be determined using the NRCS Runoff Equation (**Equation 11.3** and TR-55 Equation 2-1), or read from the tables in **Appendix 11-C** of this Chapter, or read graphically from **Figure 11-C.1** (TR-55 2-1). **Equation 11.14** reflects this change, and the definitions of the terms reflect the use of runoff depth rather than volume.

**Equation 11.14. VSMP Channel Protection Criteria:
Energy Balance Method with NRCS Terminology**

$$q_{p\text{Developed}} \leq I.F. * (q_{p\text{Pre-Developed}} * Q_{\text{Pre-Developed}}) / Q_{\text{Developed}}$$

Or rewritten:

$$q_{pDeveloped} \leq I.F. * (q_{pPre-Developed} * RV_{Pre-Developed}) / RV_{Developed}$$

Where:

I.F. (Improvement Factor) = 0.8 for sites > 1 acre or 0.9 for sites ≤ 1 acre.

$q_{pDeveloped}$ = allowable peak flow rate of runoff from the developed site (cfs).

$q_{pPre-Developed}$ = peak flow rate of runoff pre-developed condition (cfs).

$Q_{Pre-Developed} = RV_{Pre-Developed}$ = developed condition runoff depth (inches).

$Q_{Developed} = RV_{Developed}$ = developed condition runoff depth (inches).

NOTE: The term $q_{pDeveloped}$ in **Equation 11.14** could be more accurately expressed as $q_{pAllowable}$ since it represents the allowable peak discharge from the developed site, and not the peak discharge into a proposed BMP.

The addition of an improvement factor (I.F.) in the VSMP Channel Protection Criteria is based on the statutory requirement that the VSMP regulations “*improve upon the contributing share of the existing predevelopment runoff characteristics and site hydrology if stream channel erosion or localized flooding is an existing predevelopment condition.*” (§ 62.1-44.15:28.4 A 7, Code of Virginia). The improvement factor value of 0.8 for sites > 1 acre or 0.9 for sites ≤ 1 acre is established by the VSMP regulation.

11.6.2. VSMP Channel Protection Criteria: Allowable Peak Discharge Computations

The design storm for the VSMP Channel Protection Criteria is either the 2-year 24-hour design storm (for manmade stormwater conveyance system) or the 1-year 24-hour design storm (for discharge to a natural stormwater conveyance system). The design storm for the VSMP Channel Protection Criteria for restored stormwater conveyance systems will vary based on the design of the restored system. The hydrologic computations for determining the pre- and post-developed peak discharges for the various design storms, using the NRCS methods, are outlined **Sections 4-4.3 and 4-4.4 of Chapter 4** in the *Blue Book*. The following steps represent the procedure for applying the VSMP Channel Protection Criteria for the discharge of stormwater to a natural stormwater conveyance system (the 1-year 24-hour design storm) and will reference the *Blue Book* for certain hydrologic details rather than repeating them here.

The hydrology for the example development site in **Section 13.1 of Chapter 13** will be used here to illustrate the Energy Balance computations.

Step 1: Pre- and Post Development Hydrology

Develop the basic hydrologic parameters for the Drainage Areas for both the pre- and post-development conditions. The VSMP regulation Water Quantity requirements are applied at each point of stormwater discharge from the site. So while the hydrology will be established for the entire site for water quality purposes, the designer must address

water quantity requirements for each point of discharge. For this example, the Pre- and Post-development condition for **Drainage Area A** is analyzed as follows:

- The development of the CN and T_c are covered in detail in NRCS TR-55 and **Section 4.4.3 of Chapter 4** of the *Blue Book*.
- The development of the Graphical Peak Discharge is described in detail in TR-55 and **Section 4.4.4 of Chapter 4** of the *Blue Book*.

Step 2: Pre- and Post-Development Runoff Volume

The Pre- and Post-Development values for Q_I in **Table 11.4** are substituted into **Equation 11.14** above for $Q_{Pre-Developed}$ and $Q_{Post-Developed}$ respectively, along with the Improvement Factor (I.F. = 0.8) as follows:

Table 11.4. Site Hydrology: Drainage Area A

Rainfall Depths: 1-year 24-hour storm: 2.66"; 10-year 24-hour storm: 4.93"									
Pre-Developed DA A									
Land Use	Condition	HSG	Area (ac)	CN	T _c (hrs)	Q ₁ (in)	q _{p1} (cfs)	Q ₁₀ (in)	q _{p10} (cfs)
Meadow	Good	B	2.05	58					
Meadow	Good	C	1.38	71					
Woods	Good	C	0.50	70					
Total			3.93	64					
Post-Developed DA A									
Land Use	Condition	HSG	Area (ac)	CN	T _c (hrs)	Q ₁ (in)	q _{p1} (cfs)	Q ₁₀ (in)	q _{p10} (cfs)
Open Space	Good	B	2.05	61					
Open Space	Good	C	0.50	74					
Impervious		C	0.88	98					
Woods	Good	C	0.50	70					
Total			3.93	72	0.21	0.61	2.9	2.15	11.0

Equation 11.15. Energy Balance Method with NRCS Terminology – Solved for $q_{pAllowable}$

$$q_{pAllowable} \leq I.F. * (q_{pPre-Developed} * Q_{Pre-Developed}) / Q_{Developed}$$

$$q_{pAllowable} \leq 0.8 * (q_{pPre-Developed} * 0.33") / 0.61"$$

$$q_{pAllowable} \leq 0.43 * (q_{pPre-Developed})$$

Note that the term for $q_{pAllowable}$ has been substituted for $q_{pDeveloped}$.

Step 3: Allowable Post-Development Peak Discharge

If the pre-development peak discharge for the 1-year 24 hour storm has not been calculated yet, that needs to be done next. **Table 11.4** conveniently provides both the pre- and post-development values, so the post development allowable peak discharge can now be computed by inserting the value for $q_{pPre-Developed}$ into the equation developed in Step 2 above.

$$q_{pAllowable} \leq 0.43 * (0.9 \text{ cfs})$$

$$q_{pAllowable} \leq \mathbf{0.4 \text{ cfs}}$$

The 1-year post-development allowable peak discharge of 2.9 cfs (from **Table 11.4**) must be reduced to 0.4 cfs. **This reduction does not reflect the incorporation of any runoff reduction credits achieved in compliance with the water quality criteria (i.e., through BMPs).** The implementation of runoff reduction practices will reduce the developed condition runoff depth $Q_{Developed}$, which will serve to increase the calculated $q_{pAllowable}$.

Step 4: Determine the Minimum Peak Discharge

The VSMP Channel Protection Criteria (**9 VAC 25-870-66 B 3 a**) stipulates that:

- Under no condition shall the allowable developed condition discharge be greater than the pre-development discharge, and
- The allowable developed condition discharge shall not be required to be less than that of the pre-development condition reduced by the ratio of a forested condition to the Developed condition: $(q_{pForest} * Q_{Forest}) / Q_{Developed}$

The greater of the allowable discharges calculated in Step 3 and Step 4 above will govern as the developed condition allowable peak discharge.

11.6.3 Curve Number Adjustment for Large Storm Controls

An important element of the VRRM is the capability of the volume reduction practices to reduce the volume of runoff. In principle, when runoff reduction practices are used to capture and retain or infiltrate runoff, downstream stormwater management practices should not have to detain, retain or otherwise treat the volume that is removed. In other words, the volume of runoff reduction provided should be subtracted from the volume calculated by stormwater runoff peak flow computations. The challenge lies in how to accurately credit the *annual* volume reduction in the *single-event* computation of the peak rate of runoff from larger storms.

Peak flow rate reduction for single-event runoff and hydraulic routing models is accomplished by accounting for BMP stage-storage-discharge relationships. This computational procedure is outlined in detail in **Chapter 5** of the *Blue Book*. Many of the BMPs used in the Runoff

Reduction Method provide some amount of storage volume, and designers can apply basic hydraulic routing relationships to model the detention or retention of the runoff volume with respect to time. However, the response characteristics of many runoff reduction practices may not follow the traditional detention/retention design parameters. Routing of runoff reduction BMPs can be a difficult and complex task, given all the hydrologic and hydraulic variables associated with volume reduction, such as evapotranspiration, storage within the soil media, infiltration, and extended filtration.

Several methods for manipulating the post-development condition runoff hydrograph were considered: Truncated Hydrograph, Hydrograph Scalar, Multiplication, Precipitation Adjustment (subtract retention from rainfall), Runoff Adjustment (subtract retention from runoff), and *CN* adjustment. (Koch, 2005) The Runoff Reduction Method uses the *CN* adjustment as a simple and conservative method for crediting specific runoff reduction values toward peak flow reduction. The method converts the total *annual* runoff reduction credit from all the BMPs in the drainage area from cubic feet (or acre-feet) to watershed-inches of retention storage, and then uses the NRCS TR-55 runoff equations 2-1 through 2-4 provided in *Urban Hydrology for Small Watersheds* (USDA 1986) to derive a Curve Number adjustment that reflects the reduced runoff depth. This new *CN* can then be used for computing the large storm peak discharge from the drainage area for determining the storage volume needed for downstream channel or flood protection requirements.

A simplified derivation of the computational procedure starts with the combined NRCS TR-55 Runoff Equations 2-1 through 2-4 in order to express the runoff depth in terms of rainfall and potential maximum retention. In addition, the potential maximum retention, *S*, is related to soil and cover conditions of the watershed through the *CN*, as described by **Equations 11.3** through **11.6** (TR-55 Eq. 2-1 thru 2-4), repeated here for purposes of this Section.

Equation 11.3 NRCS Runoff Equation, *Q* [TR55 Eq. 2-1]

$$Q = \frac{(P - I_a)^2}{(P - I_a) + S}$$

Equation 11.4 NRCS Runoff Equation, *I_a* [TR55 Eq. 2-2]

$$I_a = 0.2S$$

Equation 11.5 Modified NRCS Runoff Equation [TR55 Eq. 2-3]

$$Q = \frac{(P - 0.2S)^2}{(P + 0.8S)}$$

Equation 11.6 NRCS Runoff Equation: *S* [TR55 Eq. 2-4]

$$S = \frac{1000}{CN} - 10$$

Where:

Q = runoff depth (in),

- P = rainfall depth (in),
 I_a = Initial abstraction (in),
 S = potential maximum retention after runoff begins (in),
 CN = Curve Number

The retention storage depth equivalent to the Runoff Reduction values assigned by the Runoff Reduction Method, and any additional retention storage provided on the site (expressed in terms of retention storage R , inches) is subtracted from the total runoff depth associated with the CN for the developed condition, which then will provide for a new value of S (Modified Equation 2-3). A new CN is then back-calculated from the new value of S using Equation 2-4 (Koch, 2005).

While it is not easy to predict the absolute runoff hydrograph modification provided by reducing stormwater runoff volumes, it is clear that reducing runoff volumes will have an impact on the runoff hydrograph of a development site. Simple routing exercises verify that this Curve Number adjustment approach represents a conservative estimate of peak reduction.

It is important to note that the Curve Number adjustment associated with the retention of one watershed-inch of runoff volume will decrease as the rainfall depth increases (meaning 1-inch of volume reduction has less of an impact on a 5-inch rain event than it will on a 2-inch rain event). Therefore, the CN adjustment must be computed for each design storm depth. This Curve Number adjustment procedure is simplified for designers in the VRRM Compliance Spreadsheet on the Channel and Flood Protection tab.

Equation 11.16: Modified Equation 11.3 NRCS Runoff Equation, Q
 [TR55 Eq. 2-1] for Retention Storage

$$Q - R = \frac{(P - 0.2S)^2}{(P + 0.8S)}$$

Where:

- Q = runoff depth (in),
 R = Retention Storage
 P = rainfall depth (in),
 S = potential maximum retention after runoff begins (in),
 CN = Curve Number

Continuing the Channel Protection Criteria computations from above, the designer should have already developed the BMP implementation strategy for the drainage area in order to move on to the CN adjustment. This design continues to develop Drainage Area A from **Section 11.6.2** above, referring to **Example 13.1** of **Chapter 13** of this Handbook.

Step 5: Retention Volume Provided in Runoff Reduction BMPs.

This example, detailed in **Section 13.1** of **Chapter 13**, includes a combination of practices: a Vegetated Filter Strip, Permeable Pavement Level 1, and Bioretention Level 2. The total volume of runoff reduction credited in this drainage area is 2,631 ft³ and is

displayed in the VRRM Compliance Spreadsheet in the DA A tab, cell I77, and in the Channel and Flood Protection tab, cell C6.

Step 6: Curve Number Reduction

The Channel and Flood Protection tab displays the **Weighted CN** for the drainage area in cell G35 based on the standard *CN* definitions for *Forest/Open Space* (assumed to be consistent with TR-55's *woods* – even if the land cover is meadow or other land cover protected as open space), *Managed Turf*, and *Impervious Cover*.

For this example, before considering any runoff reduction, the weighted $CN = 72$, which is the same as the TR-55 *CN* as provided in **Table 11.4** above.

Table 11.5 below provides the runoff depth in inches, with and without Runoff Reduction, derived from the Channel and Flood Protection tab of the VRRM Compliance Spreadsheet.

Table 11.5. Curve Number Adjustment from the VRRM Compliance Spreadsheet Channel and Flood Protection Tab

	1-year storm	2-year storm	10-year storm
RV_{Developed} (in) with no Runoff Reduction	0.61	0.94	2.14
RV_{Developed} (in) with Runoff Reduction	0.43	0.76	1.96
Adjusted CN	67	68	70

NOTE: Terminology Alert #7 – The VRRM Compliance Spreadsheet calculates the *CN* adjustment in the Channel and Flood Protection tab using the Runoff Depth, *RV*, in units of inches, which is the same parameter as the TR-55 Runoff Depth, *Q*, in inches.

The computational procedure mimics **Equations 11.3** through **11.6**, and can be computed graphically by using **Figure 11.6** below with a rainfall depth $P = 2.66$ inches, and a Direct Runoff Depth, Q (or in the VRRM terminology, RV) = 0.41 inches. The intersection of the two values corresponds to a *CN* of 67. The use of **Figure 11.6** may lead to some error in the scale and accuracy of plotting the values of rainfall and runoff, and reading the *CN*, so the designer may elect to simply use the Channel and Flood Protection tab of the VRRM Compliance Spreadsheet. Likewise, there will be situations where a computed value for the *RV* or other values in the spreadsheet may vary slightly due to rounding or interpolation. The VRRM Spreadsheet selects nearest values when solving for S and back-calculating the adjusted *CN*.

Step 7: Re-compute the developed peak discharge for the 1-year 24-hour storm ($q_{p1Developed}$).

The designer should refer to **Section 4.4.4** of **Chapter 4** of the *Blue Book* (or TR-55) for guidance on calculating the peak discharge: Rainfall depth = 2.66 inches, $T_c = 0.21$ hours; and a $CN = 67$.

The new Peak Discharge is computed as 1.6 cfs. Therefore, the application of runoff reduction practices resulted in a runoff reduction credit of 2,631 ft³, a CN reduction from 72 to 67 for the 1-year 24-hour rainfall, and a corresponding reduction in the 1-year peak discharge from 2.9 cfs to 1.6 cfs. These values are summarized in **Table 11.6**.

Table 11.6. Updated Site Hydrology for Drainage Area A, Developed Condition

	CN	q _{p1} (cfs)	RV ₁ (inches)
Pre-Developed	64	0.9	0.33
Developed	72	2.9	0.62
Developed with Runoff Reduction (RR)	67	1.6	0.42

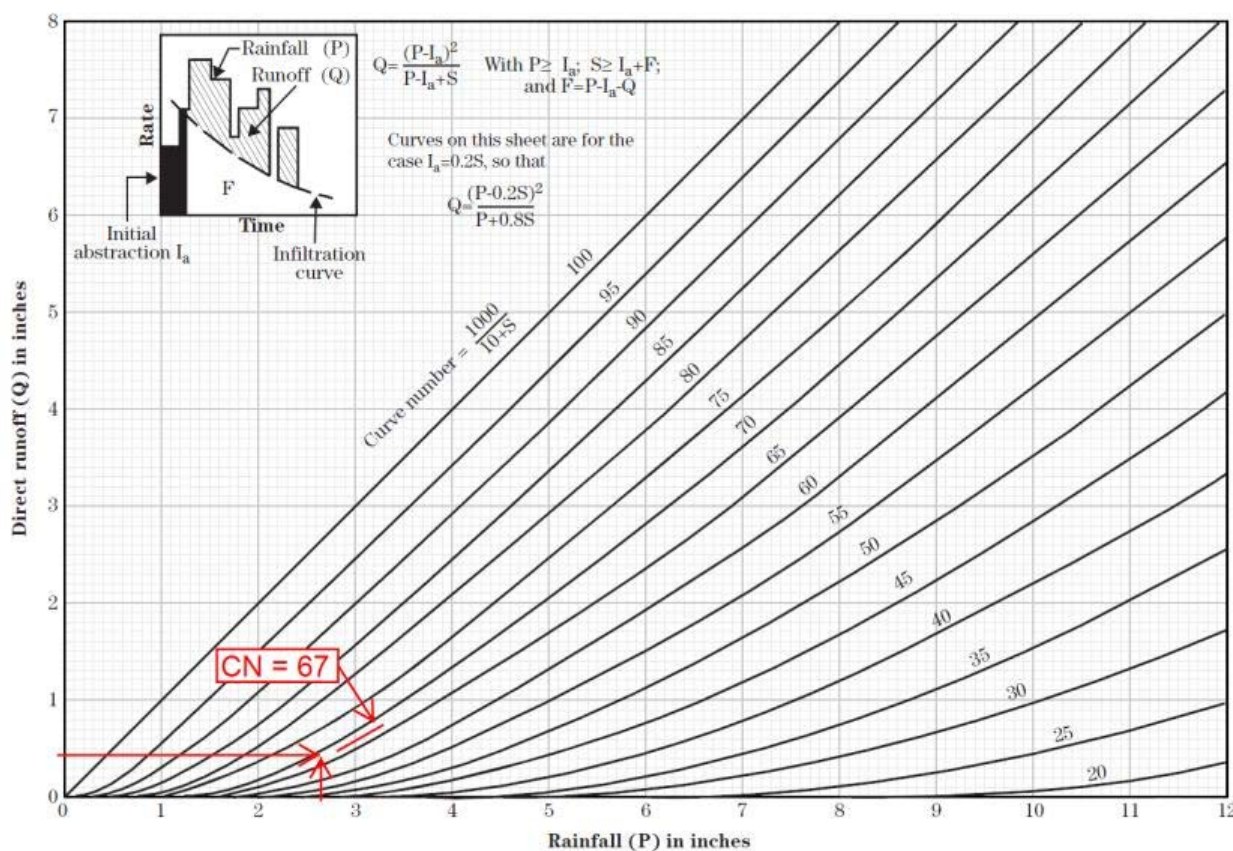


Figure 11.6. Solution of Runoff Equation (TR55, Figure 2-1)

Step 8: Calculate the Adjusted Allowable Peak Discharge (repeat of Steps 2 and 3 above with the new Site Hydrology using **Equation 11.15: Energy Balance Method with NRCS Terminology – Solved for q_{pAllowable}**):

$$q_{p1Allowable} \leq I.F. * (q_{p1Pre-Developed} * RV_{1Pre-Developed}) / RV_{1Developed\ w\ RR}$$

$$q_{p1Allowable} \leq 0.8 * (0.9 * 0.33") / 0.43"$$

$$q_{p1Allowable} \leq 0.6 \text{ cfs}$$

NOTE: The value for $Q_{Pre-Developed}$ in **Equation 11.14** is replaced with the equivalent VRRM terminology: RV_1 .

Note that the allowable peak discharge has increased, thereby reducing the required storage volume.

11.6.4 Storage Volume Computations

Several different options are available to the designer for calculating the storage volume required to reduce the developed peak discharge down to the allowable peak discharge. **Chapter 5** of the **Blue Book** discusses four different computational tools:

- Graphical Hydrograph Analysis;
- TR-55 Storage Volume for Detention Basins (Shortcut Method);
- Modified Rational Method Critical Storm Duration; and
- Modified Rational Method Critical Storm Duration, Direct Solution

The *Modified Rational Method Critical Storm Duration, Direct Solution* will require updated A, B Constants in order to solve for the storm that requires the greatest storage volume, and the *Modified Rational Method Critical Storm Duration* and the *Graphical Hydrograph Analysis* are not very practical without supporting computer software to simplify the computational process. Therefore, this Chapter will address the computational procedure using the TR-55 Storage Volume for Detention Basins (Shortcut Method), covered in **Section 5-4.2** of **Chapter 5** of the **Blue Book**. (This procedure is also available in various computer program formats.)

Step 9: Calculate the Storage Volume required to achieve the allowable peak discharge *with* runoff reduction credits:

The information required for the TR-55 Short cut method from **Table 11.6** and **Equation 11.15** above:

$$q_{p1Allowable} = 0.6 \text{ cfs}$$

$$q_{p1Developed} = 1.6 \text{ cfs}$$

$$Q_{1Developed} = RV_1 = 0.43 \text{ inches}$$

Using **Figure 11.7** below and the ratio of the allowable peak discharge to the peak inflow:

$$\left(q_o / q_i \right) \text{ or } \left(q_{p1Allowable} / q_{p1Developed} \right) = \left(0.6 \text{ cfs} / 1.6 \text{ cfs} \right) = 0.38$$

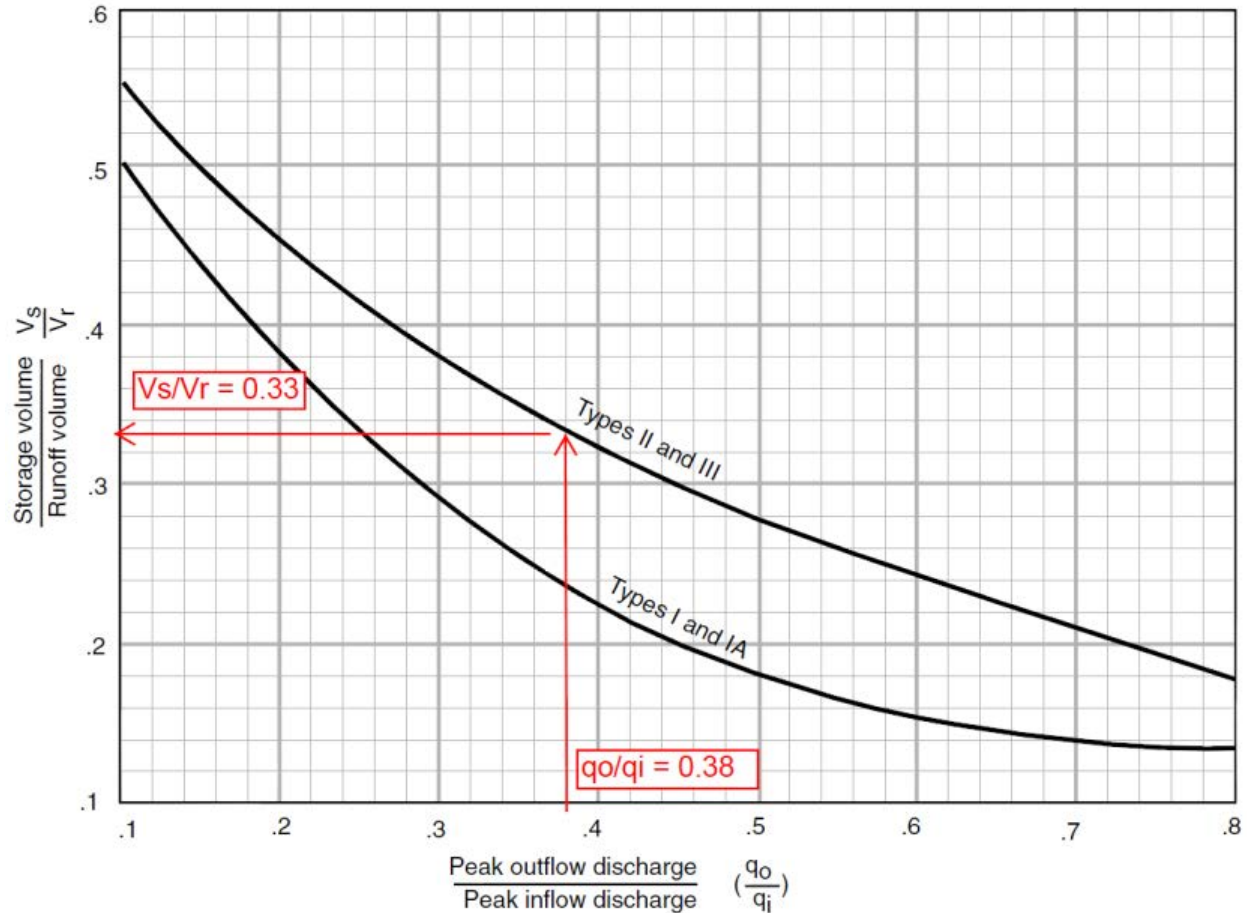


Figure 11.7. TR55 Detention Basin Routing (USDA 1986)

Read the ratio of the volume of storage to the volume of runoff from **Figure 11.7**:

$$V^S/V_r = 0.33$$

Solve for V_s : $V_s = V_r * (V^S/V_r)$

Where:

V_s = volume of storage required

V_r = developed condition runoff depth, in watershed-inches, expressed as Q or in the VRRM as RV_1 (step 9 above) = 0.43 watershed-inches

$V^S/V_r = 0.33$ from **Figure 11.7**

$$V_s = V_r * 0.33 = 0.43 * 0.33 = 0.14 \text{ watershed inches}$$

0.14 watershed inches * 3.93 ac * (3,630 ft³/ac-in) = **1,997 ft³** of storage required.

The benefits of using runoff reduction practices can be demonstrated by calculating the storage that would be required without any runoff reduction credits and comparing the result.

Repeat **Step 9** above with the following values:

Step 9: Calculate the Storage Volume required to achieve the allowable peak discharge *without* runoff reduction credits:

$$q_{p1Allowable} = 0.4 \text{ cfs (Steps 2 and 3 – no runoff reduction)}$$

$$q_{p1Developed} = 2.9 \text{ cfs (Table 11.6)}$$

$$Q_{1Developed} = RV_1 = 0.62 \text{ inches (Table 11.6)}$$

Using **Figure 11.7** and the ratio of the allowable discharge out to the discharge in:

$$(q_o/q_i) \text{ or } (q_{p1Allowable}/q_{p1Developed}) = (0.4 \text{ cfs}/2.9 \text{ cfs}) = 0.14$$

$$\text{From Figure 11.7: } V^s/V_r = 0.51$$

Solve for V_s : $V_s = V_r * (V^s/V_r) = V_r * 0.51 = 0.62 * 0.51 = 0.32$ watershed-inches

0.32 watershed inches * 3.93 ac * (3,630 ft³/ac-in) = **4,565 ft³** of storage required.

The implementation of Runoff Reduction Practices can significantly reduce the total storage volume required to achieve the allowable release rate for the VSMP Channel Protection Criteria. In this example, the channel protection storage requirement was reduced from **4,565 ft³** to **1,997 ft³** (more than a 50% reduction). The VRRM provides a double reduction as an incentive to reduce the developed condition runoff volume and more closely replicate the site's pre-development hydrologic response, as follows:

1. The VSMP Channel Protection "Energy Balance" criteria allows an increase in the $q_{p1Allowable}$ (approaching the $q_{p1Pre-Developed}$), as the developed condition runoff volume is decreased by runoff reduction practices, more closely replicating the pre-development runoff volume; and
2. The VRRM *CN* Adjustment reduces the developed condition peak discharge ($q_{p1Developed}$).

Considering the example above, it is conceivable that the retention storage provided in the runoff reduction BMPs listed in **Step 5** and discussed in **Section 13.1** of Chapter 13 can be increased to provide the additional 1,997 ft³ of storage, along with a hydraulic control structure (if needed) to ensure that the peak rate of discharge is not exceeded, thereby eliminating the need for a separate runoff quantity control detention facility.

11.6.5 VSMP Flood Protection Criteria

The same calculation procedures can be used to credit the retention storage towards the VSMP Quantity Control requirements (**9 VAC 25-870-66 C Water Quantity**). The relative influence of the retention storage towards adjusting the *CN* and the reducing the developed condition peak discharge (q_{p10}) decreases as the depth of rainfall increases. The 1-year 24-hour storm *CN* adjustment (from a *CN* of 72 to a *CN* of 67) is reduced for the 10-year 24-hour storm to a *CN* of 70.

However, the Flood Control criterion allows the designer to establish the required peak flow rate based on the capacity of the conveyance system, or based on the pre-development condition for those systems that experience flooding, and therefore may not need a significant reduction:

9 VAC 25-870-66 C. Water quantity

- C. Flood protection. Concentrated stormwater flow shall be released into a stormwater conveyance system and shall meet one of the following criteria as demonstrated by use of acceptable hydrologic and hydraulic methodologies:*
- 1. Concentrated stormwater flow to stormwater conveyance systems that currently do not experience localized flooding during the 10-year 24-hour storm event: The point of discharge releases stormwater into a stormwater conveyance system that, following the land-disturbing activity, confines the postdevelopment peak flow rate from the 10-year 24-hour storm event within the stormwater conveyance system. Detention of stormwater or downstream improvements may be incorporated into the approved land-disturbing activity to meet this criterion, at the discretion of the stormwater program administrative authority.*
 - 2. Concentrated stormwater flow to stormwater conveyance systems that currently experience localized flooding during the 10-year 24-hour storm event: The point of discharge either:*
 - a. Confines the postdevelopment peak flow rate from the 10-year 24-hour storm event within the stormwater conveyance system to avoid the localized flooding. Detention of stormwater or downstream improvements may be incorporated into the approved land-disturbing activity to meet this criterion, at the discretion of the stormwater program administrative authority; or*
 - b. Releases a postdevelopment peak flow rate for the 10-year 24-hour storm event that is less than the predevelopment peak flow rate from the 10-year 24-hour storm event. Downstream stormwater conveyance systems do not require any additional analysis to show compliance with flood protection criteria if this option is utilized.*

The pre-development and developed design storm runoff depth (*Q*, or *RV*), in inches, and peak discharge (q_{p10}), in cfs, is calculated using the same method as described for Channel Protection in this Chapter, and in **Chapters 4 and 5** of the *Blue Book*. The retention volume credit from the implementation of runoff reduction practices can be solved graphically or by reading the new *CN* from the Channel and Flood Protection tab of the VRRM Compliance Spreadsheet.

11.6.6 Limits of Analysis

Similar to the previous stormwater regulations, the VSMP Quantity Control criteria includes provisions that establish how far downstream the designer must analyze the stormwater conveyance system to demonstrate compliance. For the VSMP Channel Protection Criteria (**9 VAC 25-870-66 B 4**):

- If the VSMP Channel Protection criteria for *Natural Stormwater Conveyance Systems* is used, there is no requirement for a downstream analysis;
- If the VSMP Channel Protection criteria for *Manmade or Restored Stormwater Conveyance Systems* is used, then the stormwater conveyance systems shall be analyzed for compliance to a location that:
 - Based on land area, the point of discharge contributing drainage area is less than or equal to 1.0% of the total watershed area [draining to that point]; or
 - Based on peak flow rate, the peak flow rate from the one-year 24-hour storm at the point of discharge is less than or equal to 1.0% of the existing peak flow rate from the one-year 24-hour storm prior to the implementation of any stormwater quantity control measures.

The VSMP Flood Protection criterion (**9 VAC 25-870-66 C 3**) similarly establishes a limit of analysis when determining capacity of the stormwater conveyance system for the 10-year storm.

- If the point of discharge complies with the criteria for releasing the developed 10-year 24-hour storm peak discharge at below the pre-development rate, then no downstream analysis is required.
- If the point of discharge of the 10-year 24-hour storm is proposed to be contained within the stormwater conveyance system, then an analysis of the system to ensure the discharge stays within the system must be conducted to a point where:
 - The site's contributing drainage area is less than or equal to 1.0% of the total watershed area draining to a point of analysis in the downstream stormwater conveyance system;
 - Based on peak flow rate, the site's peak flow rate from the 10-year 24-hour storm event is less than or equal to 1.0% of the existing peak flow rate from the 10-year 24-hour storm event prior to the implementation of any stormwater quantity control measures; or
 - The stormwater conveyance system enters a mapped floodplain or other flood prone area, adopted by ordinance, of any VSMP Authority.

11.7 DEVELOPMENT ON PRIOR DEVELOPED LAND

The stormwater quality requirements for development on prior developed land are defined in **9 VAC 25-870-63** (Water Quality Design Criteria Requirements), discussed in **Chapter 5**, and outlined below. The required load reduction is a percent reduction rather than a pollutant load calculated based on the existing developed condition. In addition, within the redeveloped site, any increase of *impervious cover* (if any) must be considered as new development and therefore requires a load reduction comparable to that of new development for the acreage of new impervious (0.41 lb/ac). Therefore, the required load reduction for redevelopment is the total load reduction computed for the two conditions: the redeveloped site plus the new impervious cover on the site.

The requirements for water quantity as outlined in **9 VAC 25-870-66** (Water Quantity) do not distinguish the difference between new and re-development. Rather, the channel and flood protection requirements are defined by the downstream *stormwater conveyance system*. These stormwater quantity requirements are applied to the development project regardless of the status as new development or redevelopment, and are discussed below and covered in detail in **Section 11.6** of this Chapter.

11.7.1 Water Quality Criteria for Development on Prior Developed Land

For the purposes of the stormwater criteria, *prior developed land* is defined as land that has been previously utilized for residential, commercial, industrial, institutional, recreation, transportation or utility facilities or structures. Therefore, any land disturbing activity on a site that meets this definition must comply with the requirements of **9 VAC 25-870-63 A 2**, as follows:

2. Development on prior developed lands.

- a. *For land-disturbing activities disturbing greater than or equal to one acre that result in no net increase in impervious cover from the predevelopment condition, the total phosphorus load shall be reduced at least 20% below the predevelopment total phosphorus load.*
- b. *For regulated land-disturbing activities disturbing less than one acre that result in no net increase in impervious cover from the predevelopment condition, the total phosphorus load shall be reduced at least 10% below the predevelopment total phosphorus load.*
- c. *For land-disturbing activities that result in a net increase in impervious cover over the predevelopment condition, the design criteria for new development shall be applied to the increased impervious area. Depending on the area of disturbance, the criteria of subdivisions a or b above, shall be applied to the remainder of the site.*
- d. *In lieu of subdivision c, the total phosphorus load of a linear development project occurring on prior developed lands shall be reduced 20% below the predevelopment total phosphorus load.*
- e. *The total phosphorus load shall not be required to be reduced to below the applicable standard for new development unless a more stringent standard has been established by a local stormwater management program locality.*

The same principles outlined in **Section 11.4** of this chapter for computing the pollutant load (for both the pre-development and post-development condition) apply to the compliance computations for development on prior developed land. The difference in the computations will be in determining the pollutant load reduction requirement based on the disturbance thresholds and the amount of additional impervious cover (if any), as outlined above. The following section provides a description of the steps for computing the load reduction requirement, while **Chapter 12** outlines the procedures for using the VRRM Compliance Spreadsheet for Development on Prior Developed Lands.

NOTE: For simplicity, the term *Redevelopment* will be used for *Development on Prior Developed Land*. Likewise, the term *VRRM Redevelopment Compliance*

Spreadsheet will be used to refer to the VRRM Compliance Spreadsheet for Development on Prior Developed Lands.

The general procedure for computing the load reduction requirement on redevelopment projects is applied to 2 general categories of redevelopment:

1. Redevelopment sites that **do not** result in net increase in impervious cover in the *post-development* (or post-redevelopment) land cover; and
2. Redevelopment sites that **do** result in a net increase in impervious cover in the *post-development* (or post-redevelopment) land cover.

A third category of project is linear development occurring on prior developed lands. In order for a development project to be subject to a load reduction requirement there must be a change in the land cover from the pre- to post-development (or post-redevelopment) condition (**Table 11.1**), or other hydrologic change such as grading or drainage infrastructure improvements. Linear development as defined in the VSMP Regulations can include a variety of activities that are linear in nature but may not necessarily reflect a land cover change, i.e., above and below ground utility installation. Therefore, it is important to consider the definitions of the land cover categories of **Table 11.1** in order to verify if a change occurs, or if a management practice can be used to offset the change. Detailed definitions and management practices applicable to the different land cover designations are provided in **Table 12.1** of **Chapter 12**.

The most common type of linear development that will require a load reduction is the construction of transportation infrastructure. Linear roadway projects that construct additional traffic lanes, new turn lanes or intersection improvements in urban areas, etc., are redevelopment projects that clearly include a net increase in impervious cover. However, the VSMP Regulations specifically require that these projects achieve a 20% load reduction below the predevelopment condition; the criterion for new development (the site-based load limit) is not applied to the new impervious cover.

Another important distinction for linear transportation projects is that of pavement maintenance, i.e., milling and repaving or otherwise maintaining the roadway surface and right of way. These activities maintain the original grade, alignment, and footprint of impervious cover and are generally considered maintenance and not subject to the stormwater management requirements.

11.7.1.1 Redevelopment Sites that Do Not Increase Impervious Cover

The first procedure described here is for the sites that do not result in a net increase in impervious cover. In general this scenario requires a load reduction such that the post-development load is either 10 or 20% lower (depending on the acreage of land disturbance; see Subdivision 2-a or 2-b of **9 VAC 25-870-63 A**) than the load from the land cover of the original site.

Step 1: Resource Mapping (see **Chapter 6**) and Environmental Site Assessment

The Resource Mapping and Environmental Site Assessment will ideally identify the available locations for runoff reduction and/or pollutant removal practices on redevelopment

projects within the existing and proposed site infrastructure prior to establishing a final design and grading plan. At urban and ultra-urban redevelopment sites, the proposed micro-topography and resulting drainage divides can often be manipulated to direct runoff to these favorable locations without significant impacts to the overall site design.

The designer can implement the stormwater practices to achieve the load reduction requirement by treating the new, redeveloped, or existing site areas *within the limits of the project* (as defined by the project site). The project site should incorporate all of the disturbed area and proposed improvements (including existing buildings when being renovated), and any additional area of the site needed for vehicle access, material and equipment staging, and the construction of the stormwater BMPs.

Step 2: Site Hydrology & Pollutant Loads

1. Determine the *pre-development* land cover (forest/open space, managed turf, or impervious).

The *pre-development* (or pre-redevelopment) land cover is defined as the land cover that exists at the time that plans for the land development of a tract of land are submitted to the VSMP authority. Where a development is phased, or where plan submittal and approval is broken down into steps such as demolition of existing structures, preliminary grading, or construction of roads or utilities, etc., the land cover at the time of the first item submitted establishes the pre-development conditions.

2. Determine the *post-development* land cover (forest/open space, managed turf, or impervious).

The *post-development* (or post-redevelopment) land cover is defined as the land cover that reasonably may be expected or anticipated to exist after completion of the land development activity on a specific site (i.e., the land cover as defined by the approved plans for the redevelopment project).

3. Compute the *pre-development* and *post-development* Site R_v (**Equation 11.8**), T_v (**Equation 11.7**), and corresponding pollutant loads (**Equation 11.9**).
4. Compute the load reduction requirement using **Equation 11.17** for redevelopment projects that disturb one acre or more (land disturbance ≥ 1 acre: subdivision 2-a of **9 VAC 25-870-63 A**), or **Equation 11.18** for re-development projects that disturb less than one acre (land disturbance < 1 acre: subdivision 2-b of **9 VAC 25-870-63 A**):

Equation 11.17. Load Reduction Requirement for Redevelopment (≥ 1 acre of disturbance)

$$L_{reduction} = L_{Post-ReDevelopment} - L_{Pre-ReDevelopment}(1 - 0.2)$$

Where:

$L_{reduction}$ = Load reduction requirement (lb/yr)

$L_{Post-ReDevelopment}$ = Post-development (or post redevelopment) load (lb/yr)

$L_{Pre-ReDevelopment}$ = Pre-development (or pre redevelopment) load (lb/yr)

OR

Equation 11.18. Load Reduction Requirement for Redevelopment (< 1 acre of disturbance)

$$L_{reduction} = L_{Post-ReDevelopment} - L_{Pre-ReDevelopment}(1 - 0.1)$$

Where:

$L_{reduction}$ = Load reduction requirement (lb/yr)

$L_{Post-ReDevelopment}$ = Post-development (or post redevelopment) load (lb/yr)

$L_{Pre-ReDevelopment}$ = Pre-development (or pre redevelopment) load (lb/yr)

5. Verify that the load reduction requirement computed in item 4 does not exceed that which would be required to meet the load limit standard for new development (0.41 lb/ac):

Equation 11.19. Redevelopment Load Reduction Limit

$$L_{reduction} \leq L_{Post-ReDevelopment} - (0.41 \text{ lb/ac/yr}) \times A$$

Where:

$L_{reduction}$ = total load reduction requirement (lb) for the redevelopment project computed in Step 4

$L_{Post-ReDevelopment}$ = post-redevelopment pollutant load (**Equation 11.9**)

0.41 lb/ac/yr = site based TP load limit

A = redevelopment site area (acres)

NOTE: The VRRM Redevelopment Compliance Spreadsheet provides for these computations. The user must enter the *total disturbed acreage* and the *pre-development* and *post-development* land cover acres on the Site Data tab. The spreadsheet will compute the total load reduction requirement. Refer to **Section 12.4 of Chapter 12** for the VRRM Redevelopment Compliance Spreadsheet user's guide.

Step 3: Drainage Area Hydrology, Peak Discharge, and Treatment Volume (Tv)

Repeat the procedures of Step 2 as needed to determine the post-development Land Cover and corresponding Site R_v (**Equation 11.8**) and T_v (**Equation 11.7**) in each drainage area.

Step 4: Apply volume (or load) reduction BMPs to the redevelopment site in order to achieve the required reduction calculated in Step 2 or by **Equation 11.10**, whichever is less.

11.7.1.2 Redevelopment Sites that Increase Impervious Cover

The following procedure is for re-development sites that result in a net increase in impervious cover in the post-development condition.

Step 1: Resource Mapping (see **Chapter 6**) and Environmental Site Assessment.

Step 2: Site Hydrology & Pollutant Loads

1. Determine the *pre-development* land cover (forest/open space, managed turf, or impervious).
2. Determine the *post-development* land cover (forest/open space, managed turf, or impervious).
3. Determine the *adjusted pre-development* land cover.

The *adjusted pre-development* land cover is the pre-development land cover minus the pervious acreage (forest/open space or turf based on soil types) proposed for new impervious cover.

4. Determine a comparably adjusted *post-development* land cover.

This is the *post-development* land cover minus the net acreage of new impervious cover.

The *adjusted pre-development* land cover acreage is now the same as the post-development land cover, and is considered the redevelopment acreage used to compute the 10 or 20% load reduction requirement (**Equation 11.17** or **11.18** based on the acreage of disturbance.)

The net acreage of increased impervious cover is considered new development and is used to compute the load reduction required to meet the load limit for new development (subdivision 2-c of **9 VAC 25-870-63 A**).

5. Compute the *pre-development*, *adjusted pre-development*, *post-development*, and *new impervious* R_v (**Equation 11.8**), T_v (**Equation 11.7**), and corresponding pollutant loads (**Equation 11.9**).

NOTE: An *adjusted* pre- and post-development land cover is required in order to accommodate the computation of dual load reduction criteria for redevelopment sites with a net increase in impervious cover. The required total load reduction for the redevelopment site is the sum of the load reduction from these two computations:

- The load reduction required for the new impervious cover to meet the site based load limit of 0.41 lb/ac/yr (**Section 11.4.4.2**); and
- The load reduction required for the balance of the site to meet the 10 or 20% load reduction from that of the existing (pre-development) land cover.

6. Compute the new development area load reduction requirement for the net acreage of new impervious cover (**Equation 11.10**)
7. Compute the redevelopment area load reduction requirement using **Equation 11.17** for redevelopment projects that disturb one acre or more (land disturbance ≥ 1 acre;

subdivision 2-a of **9 VAC 25-870-63 A**), or **Equation 11.18** for redevelopment projects that disturb less than one acre (land disturbance < 1 acre; subdivision 2-b of **9 VAC 25-870-63 A**):

8. Add the load reduction requirements of Step 6 and Step 7 of this procedure for the total redevelopment site load reduction.
9. Verify that the load reduction requirement computed in item 8 does not exceed that which would be required to meet the load limit standard for new development (0.41 lb/ac) using **Equation 11.19**.

Step 3: Drainage Area Hydrology, Peak Discharge, and Treatment Volume (T_v)

Repeat the procedures of Step 2 as needed to determine the post-development Land Cover and corresponding Site R_v (**Equation 11.8**) and T_v (**Equation 11.7**) in each drainage area.

Step 4: Apply volume (or load) reduction BMPs to the redevelopment site in order to achieve the required reduction calculated in Step 2 or by **Equation 11.10**, whichever is less.

NOTE: The VRRM Redevelopment Compliance Spreadsheet provides for all of the computations listed in **Sections 11.7.1.1** and **11.7.1.2**. The user must enter the total disturbed acreage, and the *pre-development* and *post-development* land cover acres on the Site Data tab (reflecting the increase in impervious cover and the corresponding decrease in the pervious cover in the *post-development* land use). The spreadsheet will perform the computations for the two criteria and provide the total load reduction requirement. Refer to **Section 12.4** of **Chapter 12** for the VRRM Redevelopment Compliance Spreadsheet user's guide.

11.7.2 Water Quantity Criteria for Development on Prior Developed Land

The requirements for channel and flood protection on redevelopment projects are the same as those for new development and are determined in part by the type of downstream *stormwater conveyance system* (**Section 11.6.1**: VSMP Channel Protection Criteria and **Section 11.6.5**: VSMP Flood Protection Criteria, derived from **9 VAC 25-870-66**). The criteria for both channel and flood protection include provisions that identify conditions in the downstream stormwater conveyance system (erosive velocity, out of bank flows or flooding, etc.) that in turn define the specific quantity control requirements.

Minimal increases in impervious cover may in turn require a minimal amount of volume or peak flow control to meet the requirements of a manmade or restored stormwater conveyance system (**9 VAC 25-870-66 B 1 and 2**). Similarly, application of the Energy Balance Method for discharge to a natural stormwater conveyance system when the net increase in impervious cover is minimal should yield an equally minimal flow reduction requirement based on similar pre- and post-development conditions. (Even no increase in impervious cover will require some flow reduction due to the Energy Balance Method Improvement Factor of 0.8). The application of a water quality BMP strategy to achieve the load reduction requirement (10% or 20%) may

provide enough volume reduction (or be expanded as needed) such that the curve number adjustment or detention storage achieves required peak rate reduction.

In all cases, the designer should carefully analyze the receiving stormwater conveyance system in order to define the requirements, and select the appropriate BMP strategy that achieves both the quality (**Section 11.5**) and quantity requirements (**Section 11.6**).

11.8 REFERENCES

Center for Watershed Protection (CWP), 2007, National Pollutant Removal Performance Database, Version 3. Center for Watershed Protection. Ellicott City, MD

CWP. 2007. Virginia Stormwater Management: Nutrient Design System, May 14, 2007. Center for Watershed Protection, Ellicott City MD

CWP, National Fish and Wildlife Foundation (NFWF) and Virginia Department of Conservation and Recreation (VADCR). 2008. *Technical Memorandum: The Runoff Reduction Method*. April 18, 2008.

Debusk, Kathy M. EIT; Hunt W.F. Ph.D., P.E.; Line D.E., P.E. *Bioretention Outflow: Does it Mimic Watershed Shallow Interflow?* Journal of Hydrologic Engineering, Volume 16, Issue 3, March 2011.

Koch, Paul R. (2005) "A Milwaukee Model for LID Hydrologic Analysis" *Proceedings from Managing Watersheds for Human and Natural Impacts: Engineering, Ecological, and Economic Challenges*, American Society of Civil Engineers, Reston, VA.

NSDQ 2004. The National Stormwater Quality Database (NSQD, version 1.1) February 16, 2004

Robert Pitt, Alex Maestre, and Renee Morquecho Dept. of Civil and Environmental Engineering Pitt, Robert P.E., Ph.D., DEE, 1999. *Small Storm Hydrology and Why it is Important for the Design of Stormwater Control Practices*, Advances in Modeling the Management of Stormwater Impacts, Volume 7. (Edited by W. James). Computational Hydraulics International, Guelph, Ontario and Lewis Publishers/CRC Press.

Schueler, T. R., Lisa Fraley-McNeal and Karen Capiella. 2009. *Is Impervious Cover Still Important? Review of Recent Research*. Journal of Hydrologic Engineering. 14(4):309-315.

U.S.D.A.-Natural Resource Conservation Service (NRCS). *Engineering Field Manual*. Washington, DC.

U.S.D.A.-Natural Resource Conservation Service (NRCS). 1985. *National Engineering Handbook, Part 630: Hydrology*. Washington, DC. NRCS Directives website located online at: <http://directives.sc.egov.usda.gov/>; NEH630 website located online at: <http://directives.sc.egov.usda.gov/viewerFS.aspx?hid=21422>.

U.S.D.A.-Natural Resource Conservation Service (NRCS). 1956. *National Engineering Handbook, Section 5: Hydraulics*. Washington, DC.

U.S.D.A.-Natural Resource Conservation Service (NRCS). 1986. *Urban Hydrology for Small Watersheds*. Technical Release No. 55 (TR-55). Washington, DC.

U.S.D.A.-Natural Resource Conservation Service (NRCS). 1982. *Project Formulation – Hydrology*. Technical Release No. 20 (TR-20). Washington, DC.

WSSI, 2001a. January 21, 2011 RAP Presentation: *Quality Control Discussion*.

WSSI, 2001b. January 21, 2011 RAP Presentation: *Quantity Subcommittee Update*.

Appendix 11-A

HYDROLOGIC SOIL GROUPS OF VIRGINIA SOILS

The Virginia state office of the USDA-Natural Resource Conservation Service has provided the following guidance pertaining to accessing Hydrologic Soil Group information from the *National Engineering Handbook* and NRCS web resources:

NEH630, Chapter 7 Hydrologic Soils Group Update

What's new? Chapter 7 contains the official definitions of the four hydrologic soils groups that, along with land use, management practices and hydrologic conditions, determine a soil's associated runoff curve number. Chapter 7 was revised in January 2009 and May 2007. HSGs are now listed by soil map unit. **A single national [or state list] list will not be maintained and is obsolete.**

Where is the official HSG information? HSG information can be found by consulting the Soils section of the VA NRCS web site. www.va.nrcs.usda.gov/technical/Soils/index.html. You can access the soils data through the eFOTG, the State Soil Geographic Database (STATSGO), the Soil Data Mart, or the Web Soil Survey.

What about Table 2.1 in the Engineering Field Handbook? Table 2.1 is a list of HSGs by soil series and is now obsolete.

What about the EFH-2 Runoff and Peak Discharge software and the HSG database (Soils.HG)? The software has an HSG database for Virginia, available on the engineering web site www.va.nrcs.usda.gov/technical/hydrology.html. The HSG database is "officially" obsolete. However, we will review the list once per year to ensure it is current. The HSG database is current for 2008. A notification will go out once it is updated for 2009. However, the most up-to-date soils information is located on the Web Soil Survey.

Additional information for obtaining and using digital soil information
(Contact your friendly area Soil Resource Specialist for further information.)

Web Soil Survey <http://websoilsurvey.nrcs.usda.gov/app/>



Using Soil Data Viewer with ArcMap 9.2: Once a digitized soil data layer is available, the user can use soil data viewer and toolkit to create soil-based thematic map. A step-by-step guide for using soil data viewer and toolkit is available on the web (from the main soils page, <http://www.va.nrcs.usda.gov/technical/Soils/index.html>, on the left; and on the training page <http://www.va.nrcs.usda.gov/intranet/training.html>).

In light of this NRCS guidance, designers are advised to obtain soil HSG information from directly from the NRCS soils web site, in order to have the most accurate, reliable and up-to-date information.

Table 11-A.1 below is an update of a similar table provided in Appendix A of Chapter 4 of the 1999 Virginia Stormwater Management Handbook, for which this is an update. **Table 11-A.1** contains the majority of soils found in Virginia, along with their corresponding Hydrologic Soil Group designations. Soil names that appear in *italics* were listed in the 1999 Handbook but are no longer included in Virginia soils as identified by the NRCS. However, we have included them here in order for designers and regulators to be able to reference the information that may have been used in earlier stormwater management plans and BMP designs. However, **designers should note that all stormwater BMP/SCM designs that require specific soil conditions to be present should be based on an actual analysis of soils at the site.**

Table 11-A.1. Hydrologic Soil Groups in Virginia

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Abell	B	Ackwater	D	Acredale (SIL)	D
Aden (SIL)	C	Airmont (FLV-L)	C	Alaga	A
Alanthus (SIL)	B	Albano (SIL)	D	Albermarle (FSL)	B
Alderflats (SIL)	D	Allegheny	B	Alluvial Land (FSL)	B
Alluvial Land (FSL)	B/D	Alluvial Land, Sandy and Gravelly (S)	C/D	Alluvial Land, Wet (SL)	C/D
Alonzville	B	Altavista	C	Alticrest	B
Appling	B	Appomattox	B	Aqualfs (SIL)	D
Aquents (CN-SIL)	B	Aquic Udifluvents (FSL)	B	Aquults (FSL)	D
Aquults (L)	C/D	Arapahoe	B/D	Arcola	C
Argent (SIL)	D	Ashburn (SIL)	C	Ashe	B
Ashlar	B	Assateague	A	Atkins	D
Atlee	C	Augusta	C	Aura	B
Austinville (SICL)	B	Axis (VFSL)	D	Aycock (SIL)	B
Ayersville (PGR-L)	B	Backbay (MPT)	D	Badin (SIL)	B
Baile (L)	D	Bailegap	B	Balsam (CB-L)	B
Bama (SL)	B	<i>Bayboro</i>	D	Banister	C
Barkers Crossroads (L)	D	Batteau (L)	C	Beaches (S)	D
Beckham (CL)	B	Beech Grove	C	Beech Grove (SIL)	D
Belhaven (MUCK)	D	Beltsville	C	Belvoir	C
Benthole (GR-SIL)	B	Bentley (LS)	C	Berks (CN-SIL)	C
Berks (CNV-SIL)	D	Bermudian (SIL)	B	Bertie (FSL)	C
Bertie (VFSL)	B	Bethera (SIL)	D	Bethesda (GR-SIL)	C
Bibb	D	Biltmore (FSL)	A	Birdsboro (L)	B
Birdsboro (SIL)	C	Bladen	D	Blairton (SIL)	C
Bland (SICL)	C	<i>Bleakhill</i>	C	Blocktown (GR-SIL)	C/D

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Bloodyhorse (GR-L)	B	Bluemount (GR-SIL)	C	Bohicket	D
Bojac	B	Bolling	C	Bolton (L)	B
Bonneau (LS)	A	Bookwood (SIL)	B	Botetourt	C
Bourne	C	Bowmansville (SIL)	B/D	Braddock	B
<i>Bradley</i>	C	Brandywine	A	<i>Brecknock</i>	<i>B</i>
Bremo	C	Brentsville	C	Brevard (GR-FSL)	B
Brickhaven (FSL)	C	Brinklow (SIL)	D	Broadway (SIL)	B
Brockroad (SIL)	C	Brownwood	B	Brumbaugh	B
Brushy	B	Buchanan	C	Buckhall	B
<i>Bucks</i>	<i>B</i>	Buckton	B	Buffstat (CN-SIL)	B
Buffstat (SIL)	C	Bugley	C/D	Buncombe	A
Burketown (FSL)	C	Burrowsville	C	Burton (L)	B
Buzzrock (L)	B	Calverton (SIL)	C	Calvin	C
Camocca (FS)	A/D	Caneyville (SIL)	C	Carbo	C
Carbonton (FSL)	C	Cardiff	B	Cardova (GR-L)	C
Caroline	C	<i>Carrvale</i>	<i>D</i>	Cartecay	C
Cataska	D	Catharpin (SIL)	C	Catlett (GR-SIL)	C/D
Catoctin	C	Catpoint	A	Caverns (SL)	B
Cecil	B	Cedarcreek	C	Chagrin	B
Chandler (L)	B	Chantilly (L)	D	Chapanoke (SIL)	C
Chastain	D	Chatuge	D	Chavies (FSL)	B
Chenneby	C	Chesapeake (SL)	B	Chester	B
Chestnut (GR-FSL)	C	Chestnut (SL)	B	Chewacla	C
Chickahominy	D	Chilhowie	C	Chincoteague (SIL)	D
Chipley (FS)	C	Chiswell	D	Christian	C
Cid	C	Claiborne (SIL)	B	Clapham (SIL)	C
Clearbrook (CN-SIL)	D	Clifffield (CBV-FSL)	B	Clifford (L)	C
<i>Clifton</i>	C	Clingman (MK-PEAT)	D	Clover	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Cloverlick (GR-SIL)	B	Clubcaf (SIL)	D	Clymer	B
<i>Coastal Beach</i>	<i>D</i>	Codorus	C	Colescreek (FSL)	C
Colfax	C	Colleen	C	Colvard (FSL)	B
Combs	B	Comus	B	Conetoe	A
Congaree	B	<i>Coosaw</i>	<i>B</i>	Corolla (S)	D
Corydon (SICL)	D	Cotaco	C	Cottonbend	B
Coursey	C	Cowee	B	Coxville (L)	D
Craigsville (CB-SL)	B	Craven	C	Creedmoor	C
<i>Croton</i>	<i>D</i>	Cullasaja	B	Cullen	C
Culleoka (GR-SIL)	B	Culpeper	C	Daleville	D
Dan River (L)	B	Dandridge (CN-SICL)	D	Danripple	C
<i>Davidson</i>	<i>B</i>	Dawhoo (FSL)	D	<i>Decatur</i>	<i>B</i>
Dekalb	C	Delanco	C	Delila (SL)	D
Dellwood (CB-SL)	A	Deloss (FSL)	B/D	Derroc (CBV-L)	B
Devotion (SL)	B	Diana Mills (PCB-L)	C	<i>Dillard</i>	<i>C</i>
Dogue	C	Dorovan	D	Dothan (LS)	B
Downer (LS)	A	Dragston (FSL)	C	Drall	B
Drapermill (GR-L)	B	Drypond	D	Duckston (FS)	A/D
Duffield (SIL)	B	Dulles (SIL)	D	Dumfries (SL)	B
Dumps Variant	?	Dunbar (FSL)	D	Dunning (SIL)	D
Duplin (FSL)	C	Durham	B	Dyke	B
Dystrochrepts (LS)	B/D	Easthamlet (SL)	D	Ebbing (L)	C
Edgehill (GRV-FSL)	C	Edgehill (GRV-SL)	B	Edgemont	B
Edneytown	B	Edneyville	B	Edom	C
Elbert	D	Elioak	C	<i>Eliock</i>	<i>C</i>
Elkton (SIL)	C/D	Elliber (GRV-SIL)	A	Elsinboro	B
Emporia (FSL)	C	Endcav	C	Enon	C
Enott	C	Ernest	C	Escatawba	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Eubanks	B	Eulonia (FSL)	C	Eunola	C
Evansham (SICL)	D	Evard	B	<i>Evergreen</i>	B
Exum (SIL)	C	Exway (CL)	B	Faceville	B
Fairfax (L)	B	Fairpoint (CN-SIL)	C	Fairview	B
Fallsington	B/D	Fauquier	C	Faywood	C
Featherstone (MK-SIL)	D	Feedstone (SIL)	B	Fisherman (FS)	D
Fiveblock (CNV-SL)	C	Flairmont (FLV-L)	C	Flatwoods (SIL)	C
Fletcher (L)	C	Flume (L)	C	Fluvanna	C
Fluvaquents (L/SL/VFSL)	B/D	Fluvaquents (SIL/SICL/FSL)	D	Forestdale	D
Fork (FSL)	C	Frankstown (CN-SIL)	B	Frederick	B
French (L)	C	Fresh Water Swamp (MK-SL)	B/D	Fripp (S)	A
Gaila (SL)	B	Gainesboro	C	Galestown (LFS)	A
Galtsmill (FSL)	B	Georgeville	B	Germanna (SIL)	B
Gertie (SIL)	D	Gilpin	C	Gladehill	B
Glenelg	B	Glenville (L)	C	<i>Glenwood</i>	B
Golbintown (MPM)	B	Goldsboro	B	Goldston	C
Goldvein (GRV-SIL)	C	Goresville	B	Gravelly Alluvial Land (GR-L)	B/D
Greenlee (CBV-L)	B	Griffinsburg (GRV-SL)	C	Grigsby	B
Grimsley	B	Grist Mill (SL)	D	Gritney	B
Groseclose	C	Grover	B	Guernsey (SIL)	C
Gunstock	C	Gunston (SIL)	D	Guyan (SIL)	C
<i>Gwinett Variant</i>	B	Hagerstown (SIL)	C	Halewood (FSL)	C
Halifax	C	Haplaquepts (L)	A/D	Hapludults (FSL)	B/D
Happyland (GR-L)	D	Hartleton (CN-L)	B	Hatboro	D
Hattontown (SIL)	D	Hawksbill	B	Hayesville	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Hayesville (Stony)	C	Haymarket (SIL)	D	Hayter	B
<i>Haywood</i>	<i>B</i>	Hazel	C	<i>Hazel Channery</i>	<i>C</i>
Hazleton	B	Helena	C	Herndon	B
Hibler (SIL)	B	Hickoryknob (MPM)	C	Highsplint (CN-SIL)	B
Hiwassee	B	Hoadly (L)	C	Hobucken (L)	D
<i>Hogeland</i>	<i>C</i>	Holly (L)	D	Hollywood (CL)	D
Honga (PEAT)	D	Huntington	B	<i>Hyattsville</i>	<i>B</i>
Hyde (SIL)	B/D	Hydraquents (MK)	D	Ingledove (L)	B
Iotla (SL)	B	Iredell	C/D	Irongate	B
Itmann	C	Iuka (FSL)	C	Izagora	C
Izagora	C	Jackland (SIL)	D	Jedburg (L)	C
Jefferson	B	Johns	C	Johnston	D
Junaluska (CN-L)	B	Kalmia	B	Kaymine (CNV-SIL)	C
Keener (L)	B	Kelly (SIL)	D	Kempsville (LFS)	B
Kenansville	A	<i>Kenansville Variant</i>	C	Keyport (SIL)	C
Kingstowne (SCL)	D	Kinkora (SIL)	D	Kinston	B/D
<i>Klej</i>	<i>B</i>	Klinesville (CN-SIL)	C/D	Konnarock (CN-SIL)	<i>C</i>
Lackstown (FSL)	C	Laidig	C	Lakehurst (S)	A
Lakeland	A	Lakin (LS)	A	Lanexa	D
<i>Lansdale</i>	<i>B</i>	LaRoque (L)	B	Lawnes	D
Leaf (SIL)	D	Leaksville (SIL)	D	Leck Kill (SIL)	B
Leedsville (CB-SIL)	B	Leetonia (GR-LS)	C	Legore (L)	B
Lehew	C	Lenoir	D	Leon (S)	B/D
Levy	D	Lew	B	<i>Lewisberry</i>	<i>B</i>
Library (SIL)	D	Lignum	C	Lily	B
Lindside (SIL)	C	Littlejoe	B	Litz	C
Lloyd	C	Lobdell	B	Local Alluvial Land (L)	B
Lodi	B	Louisa	B	Louisburg	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Lowell (SIL)	C	Luckettes (SIL)	B	Lucy (LS)	A
<i>Lugnum</i>	C	Lumbee	B/D	Lunt	C
Lynchburg	C	Macove	B	Madison	B
Madsheep	C	Maggodee (FSL)	B	Magotha (FSL)	D
Manassas (SIL)	B	Mandy (CN-SIL)	C	Manor	B
<i>Mantachie</i>	C	Manteo	C/D	Marbie (SIL)	C
Marbleyard (CBL-SL)	C	Margo (L)	B	Marlboro (FSL)	B
Marr (VFSL)	B	Marrowbone (FSL)	C	Marumsco (L)	C
Masada	C	Massanetta	B	Massanutten	B
Matapeake (SIL)	B	Matewan (FL-FSL)	B	Matneflat (GR-SL)	B
Mattan	D	Mattapex	C	Maurertown	D
Mayodan	B	McCamy (FSL)	B	McClung (SL)	B
McGary (SIL)	C	<i>McQueen</i>	C	Meadows (GR-L)	D
Meadowville	B	Mecklenburg	C	Meggett (SL)	D
Melfa (MPT)	D	Melvin (SIL)	D	Middleburg	B
Milldraper (L)	B	Millrock	A	Mine Run (LS)	B
Minnieville	C	Mirerock	D	Mixed Alluvial Land	D
"Mixed Alluvium M1" (SIL)	B/D	"Mixed Aluvium Mm" (SIL)	B	Molena (LS)	A
Monacan (SIL)	C	Mongle (L)	C	Mongle (SIL)	D
Monongahela	C	Montalto	C	Montonia (CN-SIL)	B
<i>Montessor</i>	B	Montross (SIL)	C	Moomaw	C
<i>Morrisonville</i>	B	Morven (SIL)	B	Mount Lucas (L)	C
Mt Rogers (GR-L)	B	<i>Mt Weather</i>	B	Muckalee (L)	D
Munden	B	Murrill	B	Myatt	D
<i>Myatt Variant</i>	D	Myersville	B	Nahunta (SIL)	C
Nanford (SIL)	C	Nansemond (LS)	C	Nason (GR-L/GR-SIL)	B
Nason (L/SIL/SICL)	C	Nathalie	B	Nawney	D

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Neabsco (L)	C	Nestoria	C/D	Nevarc	C
Newark (SIL)	C	Newbern (SIL)	C	Newflat (SIL)	D
Newhan (FS)	A	Newmarc (SIL)	C	Nicelytown (SIL)	C
Nicholson (SIL)	C	Nimmo	D	Nixa	C
Nolichucky	B	Nolin (SIL)	B	Nomberville	B
Nopan (L)	D	Norfolk	B	Oak Level (L)	C
Oakhill	B	Oaklet (SIL)	C	Oatlands	B
Occoquan	B	Ochlockonee (SIL)	B	Ochraquults (FSL)	B/D
Ochrepts (CN-SIL)	D	Ochrepts (SIL)	B/D	Ocilla (LS)	B
Ogles (CBV-L)	B	Okeetee (SL)	D	Opequon (SICL)	C
Orange	D	Orangeburg	B	Orenda (L)	B
Oriskany	B	Orrville (L)	C	Osier (LFS)	A/D
Othello (SIL)	C/D	Ott (SIL)	B	Pacolet	B
Pactolus	A	Paddyknob (CNV-L)	C	Paddyknob (GR-L)	A
Pagebrook	D	Pamlico	D	Pamunkey (FSL/L)	B
Pamunkey (GR-SL)	A	Panorama (SIL)	B	Parker	B
Partlow	D	Pasquotank (SIL)	B/D	Peaks	C
Peawick	D	Penhook	B	Penn	C
Philo	B	Philomont (GR-SL)	B	Pigeonroost	B
Pignut (SIL)	C	Pineola (L)	B	Pineville (CN-L)	B
Pineywoods (SIL)	D	Pinkston	B	Pinoka (GR-FSL)	B
Pisgah (SIL)	C	Pits (S/GRX-S)	A	Pocaty (MUCK)	D
<i>Pocomoke</i>	<i>B/D</i>	Poindexter	B	Polawana	A/D
Pooler (L)	D	Pope (FSL)	B	Poplimento	C
Porters	B	Portsmouth	B/D	Pouncey (FSL)	D
Poynor (GRV-SIL)	B	Psammets (FS)	A	Pungo	D
Purcellville (SICL)	B	Purdy	D	Quantico (L)	B
Rabun (SIL)	B	Rains	B/D	Ramsey	D

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Rapidan (L)	B	Rappahannock (MUCK)	D	<i>Raritan</i>	C
Rasalo (SL)	C	Rayne	B	<i>Readington</i>	C
Reaville (SIL)	C	Redbrush (L)	C	Remlick	A
Rhodhiss (SL)	B	Rigley (SL)	B	Rion	B
Riverview	B	Rixeyville (FSL)	C	Roanoke	D
Rock Outcrop (BR)	D	Rohrersville	D	Ross (L)	B
Rough	D	Rowland (SIL)	C	Rubble Land (BYX-BY)	A
Rumford	B	Rushtown	A	<i>Ruston</i>	B
<i>Safell</i>	B	Sandy and Clayey Land (GR-SL)	B/D	Sassafras	B
Saunook (L)	B	Sauratown (GR-L)	B	Savannah	C
Scales (PEAT)	D	Scattersville	C	Schaffemaker (LS)	A
Seabrook	C	<i>Sedgefield</i>	C	Sekil (SL)	B
Seneca	B	Sequoia	C	Sewell	C
Shelocta	B	Shenval	B	Sherando	B
Sheva (FSL)	C	Shottower	B	Siloam (FSL)	D
Siloam (MPM)	C	Sindion	B	Sketerville (SIL)	C
Slabtown (SIL)	B	Slagle	C	<i>Slickens</i>	B
Sloping Sandy Land (FS)	A	<i>Snickersville</i>	B	Sowego (L)	B
Speedwell	B	Spessard (LS)	A	<i>Spivey</i>	B
Spotsylvania (FSL)	C	Spriggs	C	Springwood (SIL)	B
<i>Stanton</i>	D	Starr	C	State	B
Steep Sandy Land (FS)	A	Steinsburg (FSL)	B	Stonecoal (CNX-SL)	C
Stoneville	B	Stony Local Alluvial Land (L)	D	Stott Knob	B
Straightstone (L)	B	Strawfield (CL)	B	<i>Stuart</i>	C
Stumptown (FLV-L)	B	Suches	B	<i>Sudley (L)</i>	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Suffolk	B	Sugarhol (SIL)	B	Sulfaquents (MK-SICL)	D
Sumerduck (L)	C	Susquehanna (L)	D	<i>Swamp</i>	<i>D</i>
Swampoodle (L)	C	Sweetapple (FSL)	B	Swimley	C
Sycoline (SIL)	D	Sylco	C	Sylvatus	D
Talladega (SIL)	C	<i>Tallapoosa</i>	C	Tankerville (L)	C
Tarboro	A	Tarrus (SIL)	B	Tate (L)	B
Tatum	B	Tetotum	C	Thunder (CB-L)	B
Thurmont	B	Tidal Marsh (MUCK)	B/D	“Tidal Marsh, High” (ML-SL)	D
“Tidal Marsh, Low” (MK-SICL)	D	Timberville	B	Tioga (FSL)	B
Toast (SL)	B	Toccoa	B	Toddstav (SIL)	D
Tomotley	B/D	Toms (SIL)	C	Torhunta (L)	C
<i>Totier</i>	C	Toxaway (SIL)	B/D	Trappist (SIL)	C
<i>Trego</i>	<i>B</i>	Trenholm (SL)	D	Trimont (L)	B
Tuckahoe (L)	B	Tuckasegee (CB-L)	B	Ti,b;omg	B
Tirbevo;;e	C	Tisqiotee	B	Tugart)SIL)	D
Typic Udorthents (GRV-SL)	A/D	Uchee	A	Udalfs	D
Udifluents	B/D	Udipsamments	A/D	Udorthents (FSL)	B
Udorthents (L)	D	Udults (SL)	B/D or C/D	Unaka (L)	B
Unicoi (GRV-SL)	C	Unison	B	Urban Land (MAT)	D
Vance	C	Varina	C	Vaucluse (SL)	C
Vertrees	B	Virgilina (GR-SIL)	C	Wadesboro (CL)	B
Wahee	D	Wallen	B	Walnut (MPM)	B
Wando (LFS)	A	Warminster (CL)	C	Warne (FSL)	D
Watahala	B	Watauga	B	Wateree	B

Soil Name	Hydro Group	Soil Name	Hydro Group	Soil Name	Hydro Group
Watt	D	Waxpool (SIL)	D	Weaver (SIL)	C
<i>Weaverton</i>	C	Webbtown (CN-SIL)	C	Wedowee	B
Weeksville (SIL)	B/D	Wehadkee	D	Weikert	C/D
Westfield (L)	B	Westmoreland (SIL)	B	Weston (FSL)	D
Westphalia (LVFS)	B	Weverton	B	Wharton (SIL)	C
Wheaton (L)	D	Wheeling	B	<i>White Stone</i>	D
Whiteford (SIL)	B	Wickham (FSL)	B	Wilkes	C
Wingina (L)	B	Winnsboro (SL)	C	Wintergreen	B
Winton (FSL)	C	Wolfgap	B	Wolftrap (FSL)	D
Woodington (FSL)	B/D	Woodstown	C	Woolwine	B
Worsham	D	Wrightsboro (FSL)	C	Wurno	C
Wyrick	B	Yadkin	B	Yellowbottom (L)	C
Yemassee (FSL)	C	Yeopim (SIL)	B	Yogaville	B/D
York (SIL)	C	Zepp	B	Zion	C
Zoar	C				

Source: Compiled from the USDA-NRCS Online Soil Survey Data for Virginia, July, 2009

Appendix 11-B

24-HOUR RAINFALL DEPTH DATA FOR VIRGINIA

Table of Contents

TABLES

Table 11-B.1.	NRCS Implementation of NOAA's ATLAS 14 Rainfall Data for Virginia	11-B-2
---------------	---	--------

FIGURES

Figure 11-B-1.	NRCS Rainfall Zone Map for Albermarle County, Virginia	11-B-6
Figure 11-B.2.	NRCS Rainfall Zone Map for Augusta County, Virginia	11-B-7
Figure 11-B.3.	NRCS Rainfall Zone Map for Bedford County, Virginia	11-B-8
Figure 11-B.4.	NRCS Rainfall Zone Map for Carroll County, Virginia	11-B-9
Figure 11-B.5.	NRCS Rainfall Zone Map for Floyd County, Virginia	11-B-10
Figure 11-B.6.	NRCS Rainfall Zone Map for Giles County, Virginia	11-B-11
Figure 11-B.7.	NRCS Rainfall Zone Map for Grayson County, Virginia	11-B-12
Figure 11-B.8.	NRCS Rainfall Zone Map for Greene County, Virginia	11-B-13
Figure 11-B.9.	NRCS Rainfall Zone Map for Madison County, Virginia	11-B-14
Figure 11-B.10.	NRCS Rainfall Zone Map for Montgomery County, Virginia	11-B-15
Figure 11-B.11.	NRCS Rainfall Zone Map for Page County, Virginia	11-B-16
Figure 11-B.12.	NRCS Rainfall Zone Map for Patrick County, Virginia	11-B-17
Figure 11-B.13.	NRCS Rainfall Zone Map for Roanoke County, Virginia	11-B-18
Figure 11-B.14.	NRCS Rainfall Zone Map for Rockbridge County, Virginia	11-B-19
Figure 11-B.15.	NRCS Rainfall Zone Map for Rockingham County, Virginia	11-B-20
Figure 11-B.16.	NRCS Rainfall Zone Map for Scott County, Virginia	11-B-21

Table 11-B.1 provides the 24-hour rainfall depths for Virginia counties and major cities, as updated through summer 2013 by the Virginia office of the USDA-NRCS. For counties having more than one rainfall zone, consult the appropriate map figures following the table for the approximate boundaries of the various zones. For localities not listed, see data for an adjacent locality.

Table 11-B.1. NRCS Implementation of NOAA's ATLAS 14 Rainfall Data for Virginia


County	Rainfall Type	Storm Return Frequency (Years)						
		1	2	5	10	25	50	100
Accomack	DMV C	2.7	3.3	4.2	5.1	6.4	7.5	8.8
Albermarle (Zone 1)	NOAA D	3.4	4.1	5.2	6.2	7.6	8.7	10.1
Albermarle (Zone 2)	NOAA D	3.0	3.6	4.6	5.5	6.7	7.8	9.0
Alleghany	NOAA C	2.4	2.8	3.6	4.2	5.0	5.8	6.5
Amelia	NOAA C	2.7	3.3	4.2	5.0	6.1	7.1	8.2
Amherst	NOAA C	2.8	3.4	4.4	5.1	6.3	7.2	8.3
Appomattox	NOAA C	2.8	3.4	4.4	5.2	6.4	7.4	8.5
Augusta (Zone 1)	NOAA C	2.4	3.0	3.7	4.4	5.3	6.1	6.9
Augusta (Zone 2)	NOAA D	2.8	3.4	4.3	5.1	6.2	7.1	8.1
Bath	NOAA C	2.5	3.0	3.7	4.4	5.3	6.0	6.8
Bedford (Zone 1)	NOAA D	3.1	3.8	4.8	5.7	7.0	8.1	9.3
Bedford (Zone 2)	NOAA C	2.8	3.3	4.3	5.0	6.2	7.1	8.2
Bland	NOAA A	2.2	2.6	3.2	3.6	4.2	4.7	5.2
Botetourt	NOAA C	2.6	3.2	4.1	4.8	5.8	6.7	7.6
Brunswick	NOAA C	2.8	3.4	4.4	5.2	6.3	7.3	8.3
Buchanan	NOAA A	2.2	2.6	3.2	3.7	4.3	4.9	5.5
Buckingham	NOAA C	2.8	3.4	4.3	5.1	6.3	7.3	8.3
Campbell	NOAA C	2.7	3.3	4.3	5.0	6.2	7.2	8.25
Caroline	NOAA C	2.7	3.3	4.2	5.0	6.3	7.3	8.6
Carroll (Zone 1)	NOAA B	2.3	2.7	3.4	4.0	4.8	5.5	6.1
Carroll (Zone 2)	NOAA C	2.6	3.2	4.0	4.7	5.6	6.4	7.2
Carroll (Zone 3)	NOAA C	3.0	3.6	4.6	5.3	6.5	7.5	8.5
Carroll (Zone 4)	NOAA D	3.4	4.1	5.2	6.1	7.5	8.6	9.9
Charles City	NOAA C	2.8	3.4	4.4	5.2	6.5	7.6	8.8
Charlotte	NOAA C	2.7	3.3	4.2	5.0	6.1	7.1	8.1
Chesapeake (city)	NOAA B	3.0	3.7	4.8	5.7	7.0	8.2	9.4
Chesterfield	NOAA C	2.8	3.4	4.3	5.1	6.3	7.3	8.4
Clarke	NOAA B	2.4	2.9	3.6	4.3	5.2	5.9	6.8
Craig	NOAA C	2.4	2.9	3.6	4.2	5.1	5.9	6.6
Culpeper	NOAA C	2.7	3.3	4.2	5.0	6.2	7.2	8.1
Cumberland	NOAA C	2.7	3.3	4.2	5.0	6.1	7.07	8.14
Dickenson	NOAA A	2.2	2.6	3.2	3.7	4.4	5.0	5.7
Dinwiddie	NOAA C	2.8	3.4	4.4	5.2	6.3	7.3	8.4
Essex	NOAA C	2.7	3.2	4.2	5.0	6.3	7.4	8.6

County	Rainfall Type	Storm Return Frequency (Years)						
		1	2	5	10	25	50	100
Fairfax	NOAA C	2.6	3.1	4.0	4.8	6.0	7.0	8.2
Fauquier	NOAA B	2.6	3.2	4.0	4.8	5.9	6.9	8.0
Floyd (Zone 1)	NOAA C	2.5	3.1	3.9	4.6	5.6	6.4	7.3
Floyd (Zone 2)	NOAA C	2.9	3.5	4.4	5.2	6.4	7.4	8.4
Floyd (Zone 3)	NOAA D	3.4	4.1	5.3	6.2	7.6	8.8	10.2
Floyd (Zone 4)	NOAA D	3.8	4.6	5.9	7.0	8.6	10.0	11.5
Fluvanna	NOAA C	2.7	3.3	4.2	4.9	6.0	7.0	8.1
Franklin	NOAA C	2.8	3.4	4.4	5.2	6.32	7.31	8.39
Frederick	NOAA B	2.4	2.8	3.5	4.1	5.0	5.7	6.5
Giles (Zone 1)	NOAA A	2.1	2.5	3.1	3.6	4.3	4.9	5.5
Giles (Zone 2)	NOAA B	2.3	2.8	3.5	4.1	4.9	5.6	6.4
Gloucester	NOAA C	2.9	3.5	4.5	5.4	6.7	7.9	9.2
Goochland	NOAA C	2.7	3.3	4.2	5.0	6.1	7.1	8.2
Grayson (Zone 1)	NOAA C	3.3	3.9	4.9	5.7	6.8	7.7	8.7
Grayson (Zone 2)	NOAA B	2.4	2.9	3.6	4.1	4.9	5.6	6.2
Grayson (Zone 3)	NOAA C	2.7	3.2	4.1	4.7	5.7	6.5	7.3
Greene	NOAA D	3.0	3.7	4.7	5.5	6.7	7.8	8.9
Greensville	NOAA B	2.7	3.3	4.2	5.0	6.2	7.2	8.3
Halifax	NOAA B	2.7	3.3	4.1	4.9	6.0	6.9	7.9
Hampton (city)	NOAA C	2.9	3.6	4.6	5.5	6.9	8.1	9.3
Hanover	NOAA C	2.7	3.3	4.2	5.0	6.2	7.3	8.4
Henrico	NOAA C	2.7	3.3	4.3	5.1	6.3	7.3	8.4
Henry	NOAA C	2.9	3.5	4.5	5.3	6.5	7.5	8.7
Highland	NOAA C	2.4	2.9	3.6	4.2	5.0	5.7	6.4
Isle of Wight	NOAA B	3.0	3.6	4.7	5.5	6.8	8.0	9.2
James City	NOAA C	2.9	3.5	4.6	5.5	6.8	7.9	9.2
King and Queen	NOAA C	2.7	3.3	4.3	5.1	6.4	7.5	8.7
King George	NOAA C	2.6	3.2	4.1	5.0	6.2	7.3	8.5
King William	NOAA C	2.7	3.3	4.2	5.1	6.3	7.4	8.6
Lancaster	NOAA C	2.7	3.3	4.3	5.2	6.5	7.6	8.9
Lee	NOAA B	2.5	3.0	3.7	4.2	5.0	5.7	6.3
Loudoun	NOAA B	2.6	3.1	4.0	4.7	5.7	6.7	7.7
Louisa	NOAA C	2.7	3.3	4.2	5.0	6.2	7.2	8.3
Lunenburg	NOAA C	2.7	3.3	4.2	5.0	6.1	7.1	8.2
Lynchburg (city)	NOAA C	2.8	3.3	4.3	5.0	6.2	7.2	8.2
Madison (Zone 1)	NOAA D	3.4	4.1	5.2	6.1	7.5	8.7	9.9
Madison (Zone 2)	NOAA C	2.9	3.5	4.4	5.3	6.5	7.5	8.6
Mathews	NOAA C	2.8	3.4	4.5	5.4	6.7	7.9	9.2
Mecklenburg	NOAA B	2.7	3.2	4.1	4.9	5.9	6.8	7.8
Middlesex	NOAA C	2.8	3.4	4.4	5.3	6.6	7.7	9.0
Montgomery (Zone 1)	NOAA B	2.0	2.4	3.1	3.6	4.3	5.0	5.6

County	Rainfall Type	Storm Return Frequency (Years)						
		1	2	5	10	25	50	100
Montgomery (Zone 2)	NOAA B	2.3	2.7	3.5	4.1	5.0	5.7	6.5
Montgomery (Zone 3)	NOAA C	2.6	3.2	4.0	4.7	5.8	6.6	7.6
Nelson	NOAA D	3.0	3.6	4.6	5.5	6.7	7.7	8.8
New Kent	NOAA C	2.8	3.4	4.4	5.2	6.4	7.5	8.7
Newport News (city)	NOAA C	2.9	3.6	4.6	5.5	6.9	8.0	9.3
Norfolk (city)	NOAA C	2.9	3.6	4.6	5.5	6.8	8.0	9.2
Northampton	DMV C	2.7	3.3	4.3	5.2	6.48	7.61	8.88
Northumberland	NOAA C	2.7	3.3	4.3	5.1	6.4	7.5	8.8
Nottoway	NOAA C	2.7	3.3	4.2	5.0	6.2	7.1	8.2
Orange	NOAA C	2.8	3.3	4.3	5.1	6.3	7.3	8.5
Page (Zone 1)	NOAA C	2.4	2.9	3.7	4.4	5.3	6.1	6.9
Page (Zone 2)	NOAA D	3.0	3.6	4.6	5.4	6.6	7.6	8.7
Patrick (Zone 1)	NOAA D	3.8	4.6	5.9	7.0	8.6	9.9	11.5
Patrick (Zone 2)	NOAA D	3.3	4.0	5.2	6.1	7.5	8.7	10.0
Patrick (Zone 3)	NOAA C	3.0	3.7	4.7	5.6	6.8	7.9	9.1
Petersburg (city)	NOAA C	2.8	3.4	4.4	5.2	6.3	7.4	8.5
Pittsylvania	NOAA C	2.8	3.4	4.3	5.1	6.2	7.2	8.2
Poquoson (city)	NOAA C	2.9	3.6	4.6	5.5	6.9	8.0	9.4
Portsmouth (city)	NOAA C	3.0	3.6	4.7	5.6	6.9	8.0	9.3
Powhatan	NOAA C	2.7	3.3	4.2	5.0	6.1	7.1	8.2
Prince Edward	NOAA C	2.7	3.3	4.3	5.0	6.2	7.2	8.3
Prince George	NOAA C	2.8	3.4	4.4	5.2	6.4	7.5	8.6
Prince William	NOAA C	2.5	3.0	3.9	4.7	5.8	6.9	8.0
Pulaski	NOAA A	2.0	2.4	3.1	3.6	4.3	5.0	5.6
Rappahannock	NOAA C	2.8	3.4	4.3	5.0	6.2	7.1	8.2
Richmond (city)	NOAA C	2.8	3.4	4.3	5.1	6.3	7.3	8.4
Richmond	NOAA C	2.7	3.3	4.3	5.1	6.4	7.5	8.8
Roanoke (Zone 1)	NOAA C	2.4	2.9	3.6	4.2	5.2	5.9	6.7
Roanoke (Zone 2)	NOAA C	2.6	3.2	4.0	4.7	5.7	6.6	7.5
Rockbridge	NOAA C	2.5	3.0	3.9	4.5	5.5	6.3	7.2
Rockingham (Zone 1)	NOAA B	2.3	2.8	3.5	4.1	4.9	5.6	6.4
Rockingham (Zone 2)	NOAA D	2.9	3.4	4.4	5.1	6.2	7.1	8.1
Russell	NOAA A	2.2	2.6	3.2	3.6	4.3	4.8	5.4
Scott (Zone 1)	NOAA A	2.4	2.8	3.4	3.9	4.6	5.2	5.8
Scott (Zone 2)	NOAA A	2.3	2.7	3.2	3.6	4.2	4.6	5.0
Shenandoah	NOAA B	2.3	2.8	3.5	4.1	5.0	5.7	6.5
Smyth	NOAA A	2.3	2.7	3.2	3.7	4.2	4.7	5.1
Southampton	NOAA B	2.9	3.5	4.5	5.4	6.6	7.7	8.8
Spotsylvania	NOAA C	2.7	3.2	4.2	4.9	6.1	7.2	8.4
Stafford	NOAA C	2.6	3.1	4.0	4.8	6.0	7.0	8.2
Suffolk (city)	NOAA B	3.0	3.6	4.7	5.6	6.9	8.0	9.3

County	Rainfall Type	Storm Return Frequency (Years)						
		1	2	5	10	25	50	100
Surry	NOAA C	2.9	3.5	4.6	5.4	6.7	7.8	9.0
Sussex	NOAA C	2.9	3.5	4.5	5.3	6.5	7.5	8.6
Tazewell	NOAA A	2.1	2.5	3.0	3.5	4.1	4.6	5.1
Virginia Beach (city)	NOAA C	3.0	3.7	4.7	5.7	7.0	8.2	9.4
Warren (Zone 1)	NOAA B	2.5	3.0	3.8	4.4	5.4	6.2	7.1
Warren (Zone 2)	NOAA C	2.8	3.4	4.3	5.1	6.2	7.2	8.3
Washington	NOAA A	2.2	2.6	3.1	3.5	4.0	4.4	4.8
Westmoreland	NOAA C	2.7	3.2	4.2	5.0	6.3	7.4	8.7
Wise	NOAA A	2.3	2.7	3.3	3.8	4.6	5.2	5.9
Wythe	NOAA A	2.1	2.5	3.1	3.6	4.2	4.7	5.3
York	NOAA C	2.9	3.6	4.6	5.5	6.8	8.0	9.3

Source: USDA-NRCS State Office, Richmond, VA

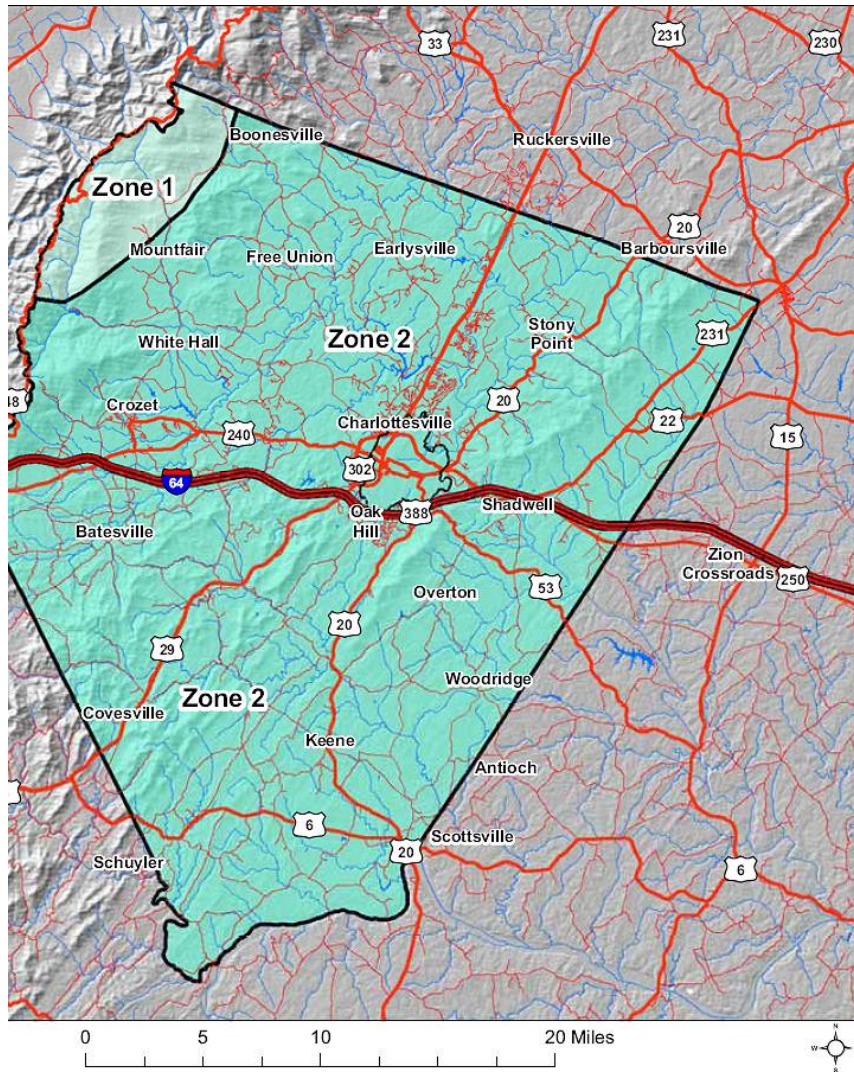

**Albemarle County, Virginia
Rainfall Zones Using
NOAA Atlas 14 Data**

Legend

VA Rainfall Zones

- Albemarle Co Zone 1
- Albemarle Co Zone 2
- VDOT Interstate
- VDOT Primary
- VDOT Secondary
- NHD Main Streams
- County Boundary

THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER – THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 11/28/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD). USDA is an equal opportunity provider and employer.



Figure 11-B-1. NRCS Rainfall Zone Map for Albemarle County, Virginia


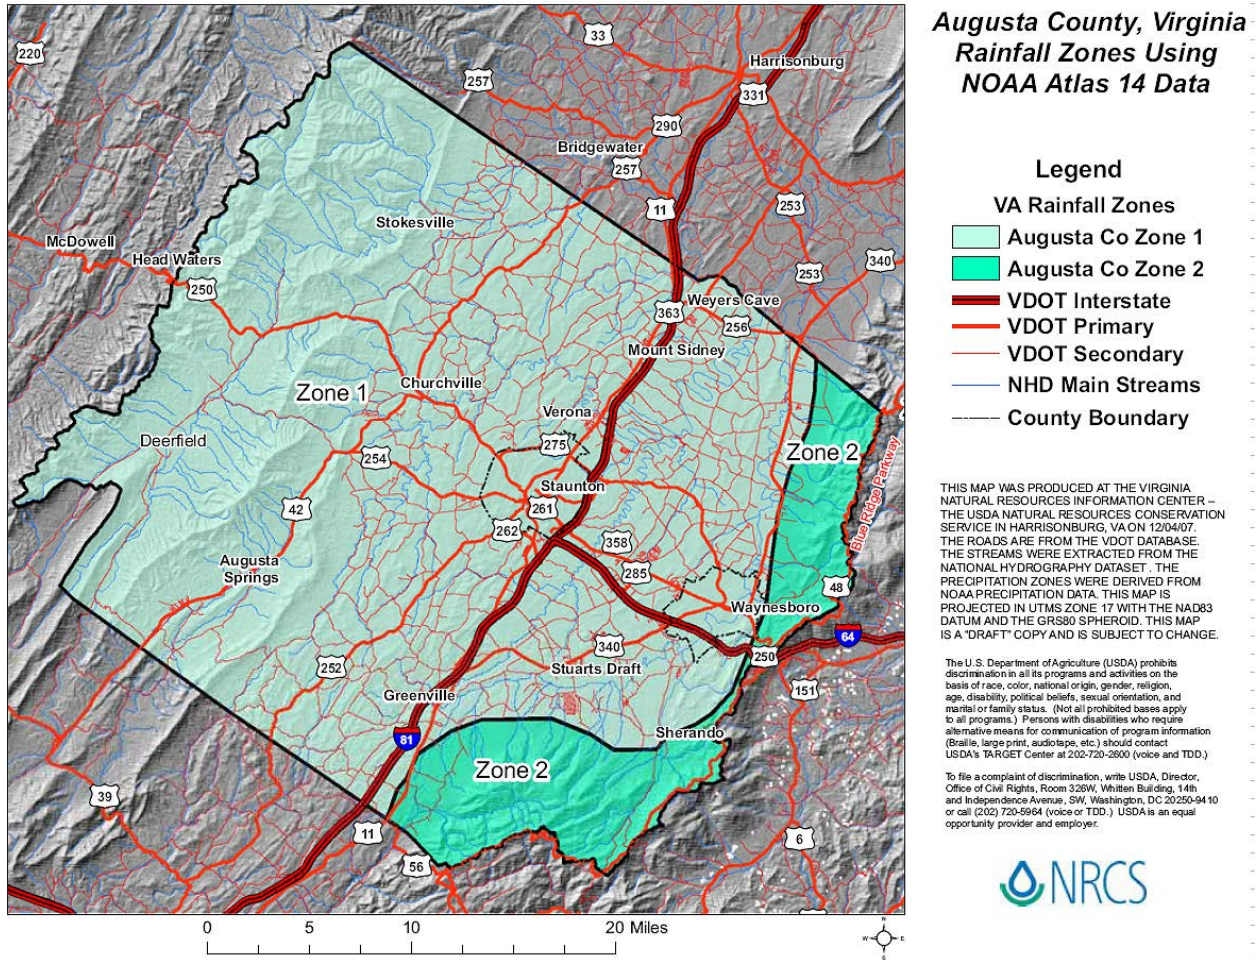


Figure 11-B.2. NRCS Rainfall Zone Map for Augusta County, Virginia

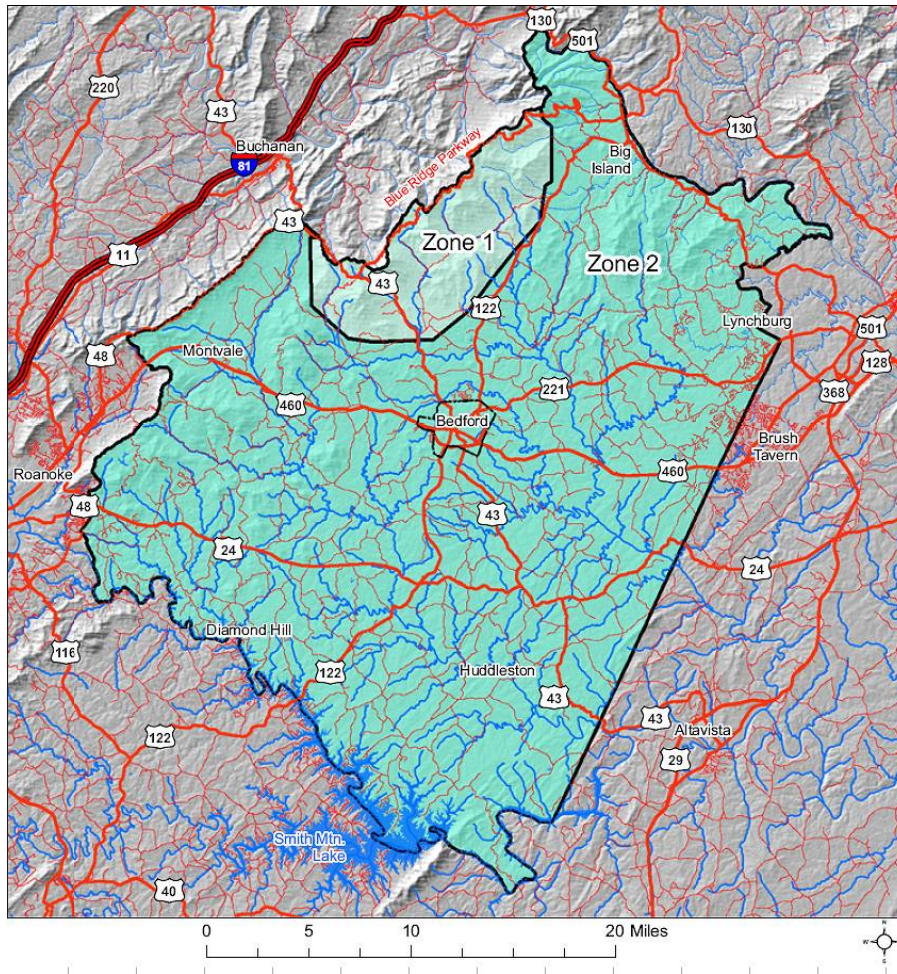

**Bedford County, Virginia
Rainfall Zones Using
NOAA Atlas 14 Data**

Legend

VA Rainfall Zones

- Bedford Co Zone 1
- Bedford Co Zone 2
- VDOT Interstate
- VDOT Primary
- VDOT Secondary
- NHD Main Streams
- County Boundary

THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER – THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 12/04/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM5 ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-6954 (voice or TDD.) USDA is an equal opportunity provider and employer.



Figure 11-B.3. NRCS Rainfall Zone Map for Bedford County, Virginia


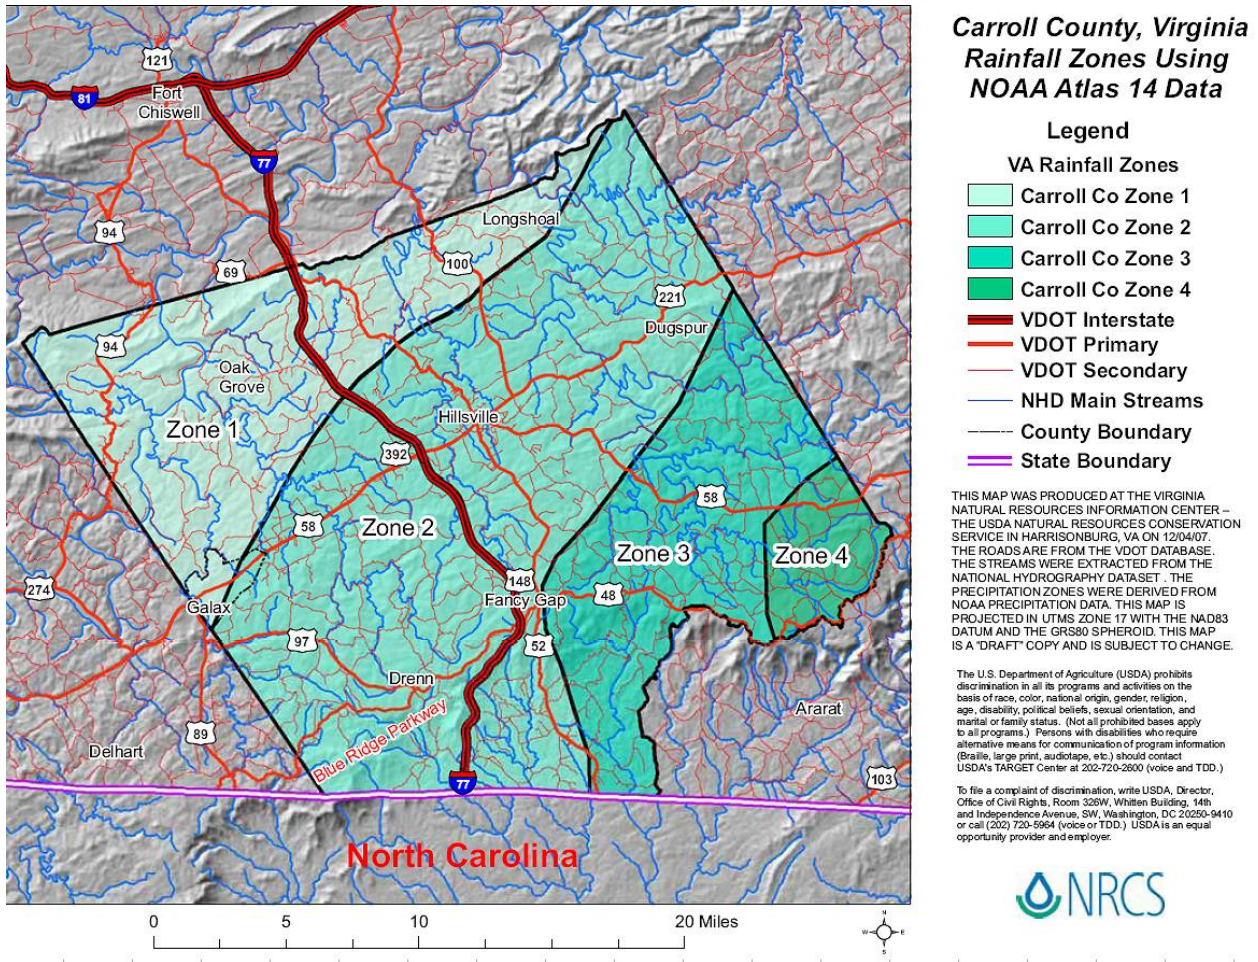


Figure 11-B.4. NRCS Rainfall Zone Map for Carroll County, Virginia

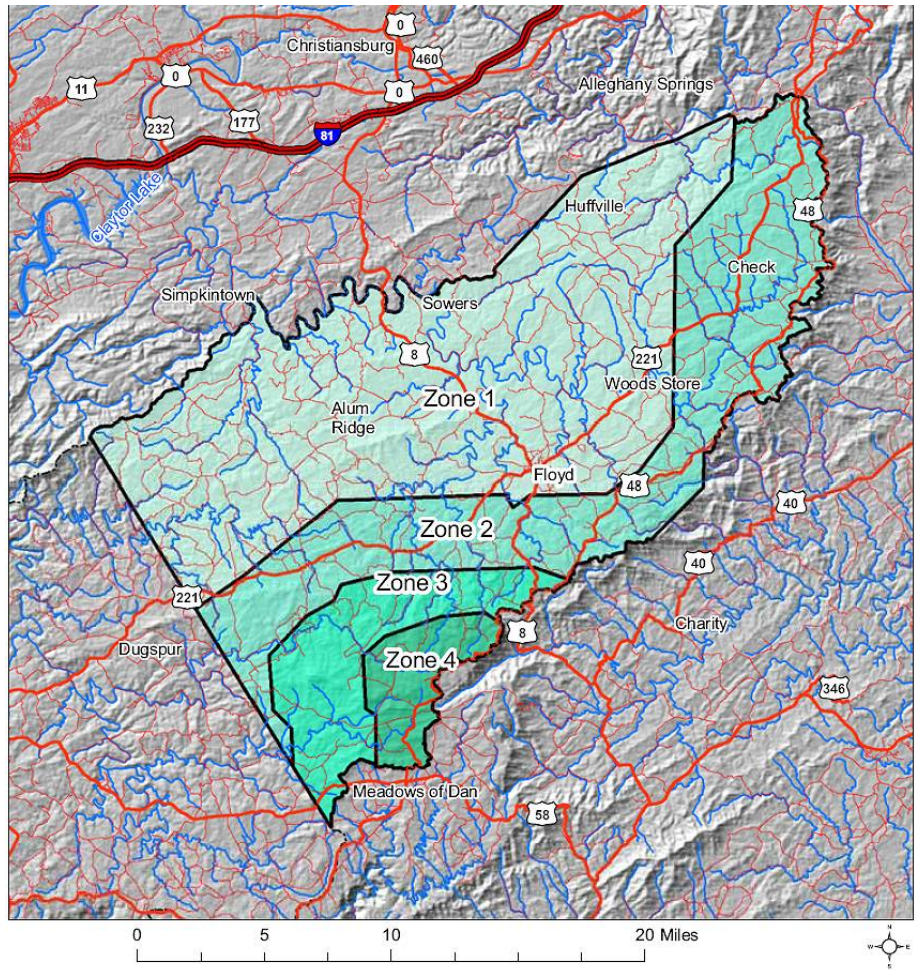

**Floyd County, Virginia
Rainfall Zones Using
NOAA Atlas 14 Data**

Legend

- VA Rainfall Zones**
- Floyd Co Zone 1
 - Floyd Co Zone 2
 - Floyd Co Zone 3
 - Floyd Co Zone 4
 - VDOT Interstate
 - VDOT Primary
 - VDOT Secondary
 - NHD Main Streams
 - County Boundary


THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER – THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 12/04/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 320W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD.) USDA is an equal opportunity provider and employer.



Figure 11-B.5. NRCS Rainfall Zone Map for Floyd County, Virginia

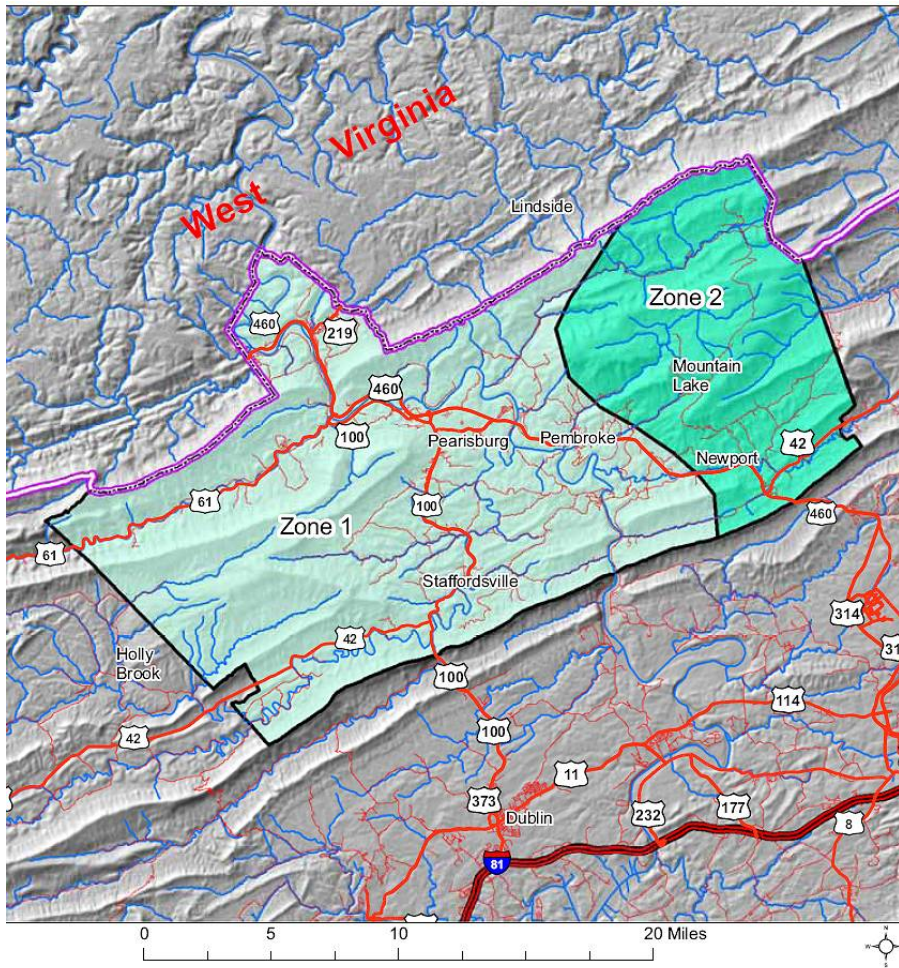

**Giles County, Virginia
Rainfall Zones Using
NOAA Atlas 14 Data**

Legend

VA Rainfall Zones

- Giles Co Zone 1
- Giles Co Zone 2
- VDOT Interstate
- VDOT Primary
- VDOT Secondary
- NHD Main Streams
- County Boundary
- State Boundary

THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER - THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISBURG, VA ON 12/04/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM'S ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD.) USDA is an equal opportunity provider and employer.



Figure 11-B.6. NRCS Rainfall Zone Map for Giles County, Virginia

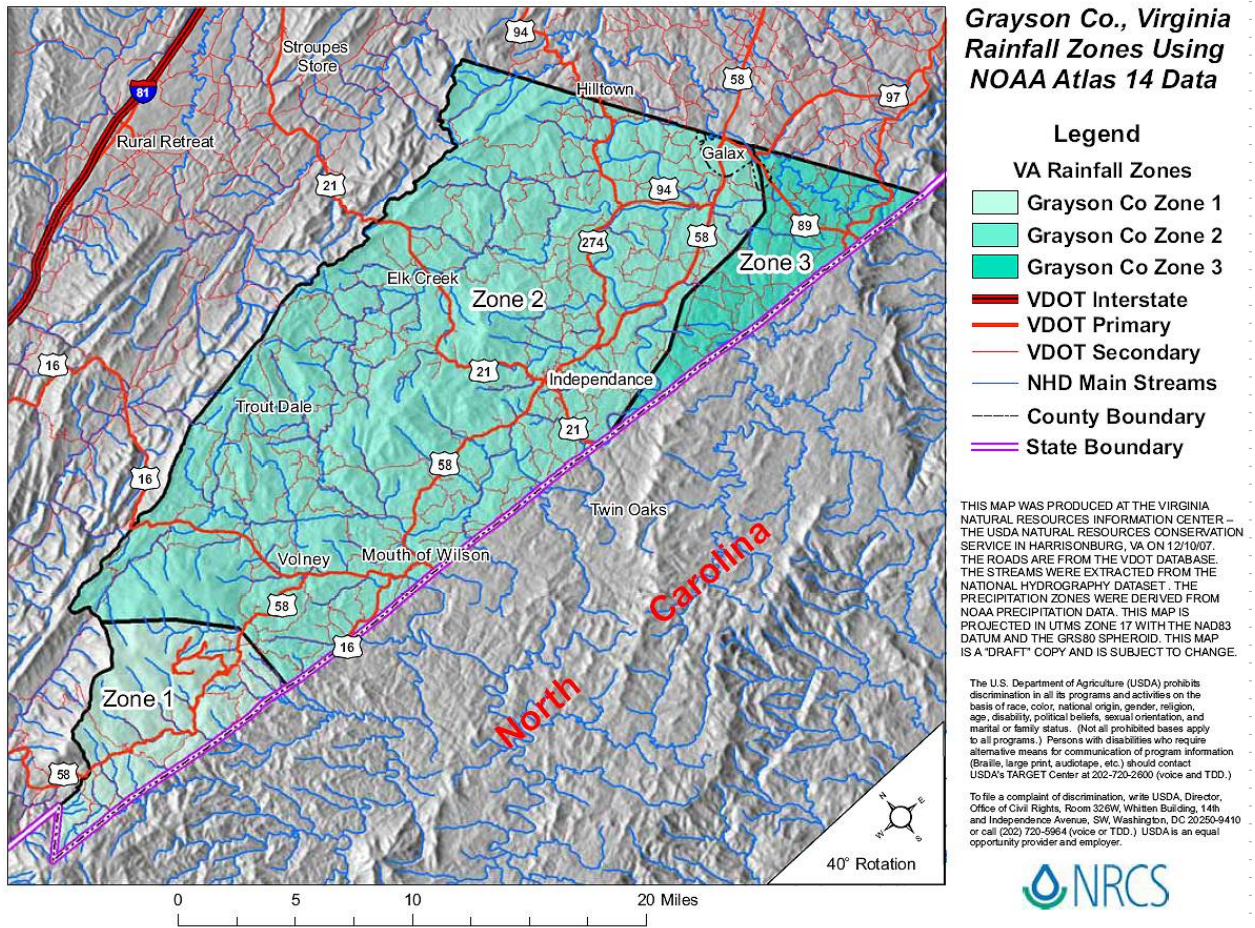


Figure 11-B.7. NRCS Rainfall Zone Map for Grayson County, Virginia

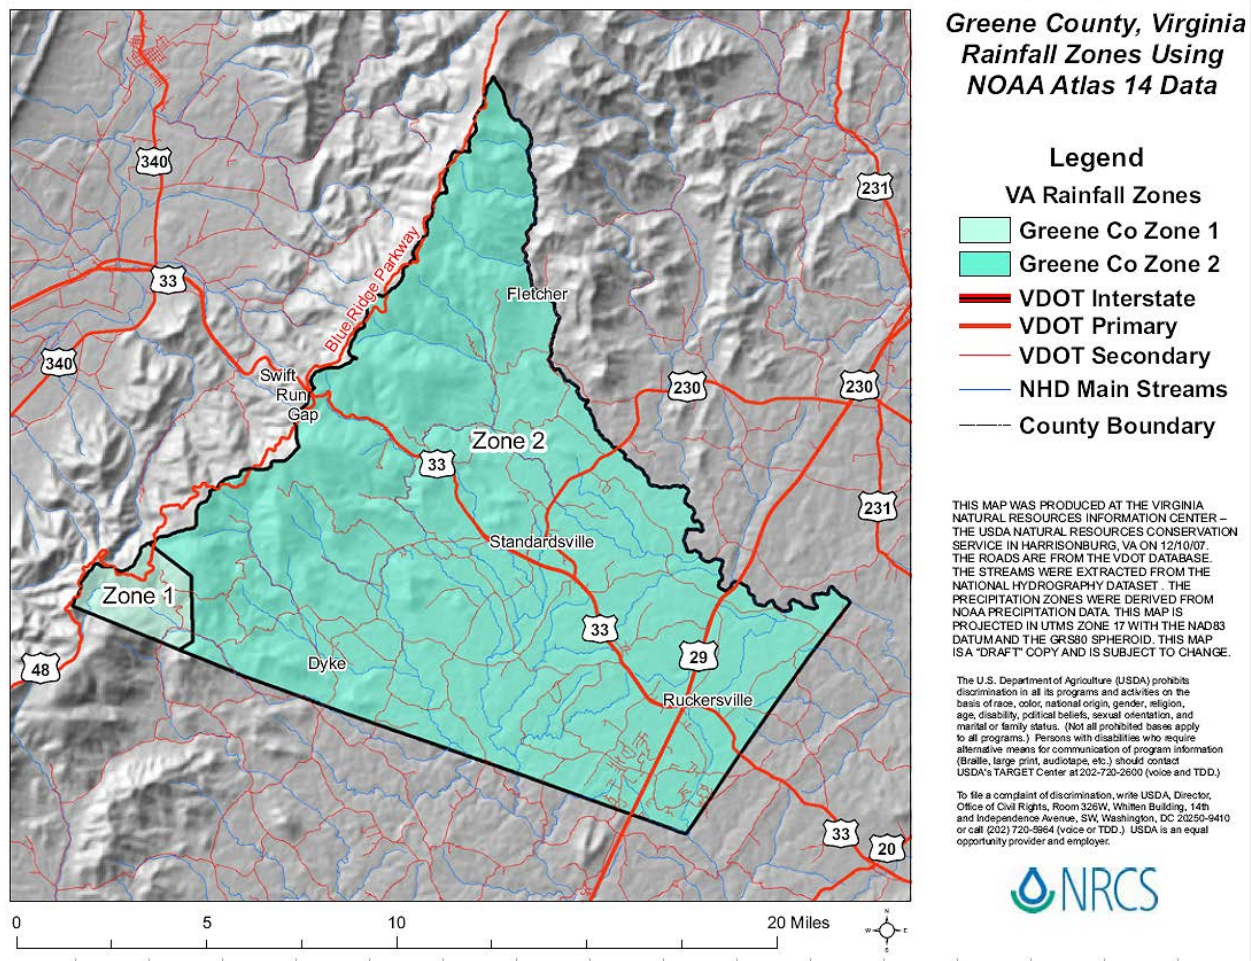


Figure 11-B.8. NRCS Rainfall Zone Map for Greene County, Virginia

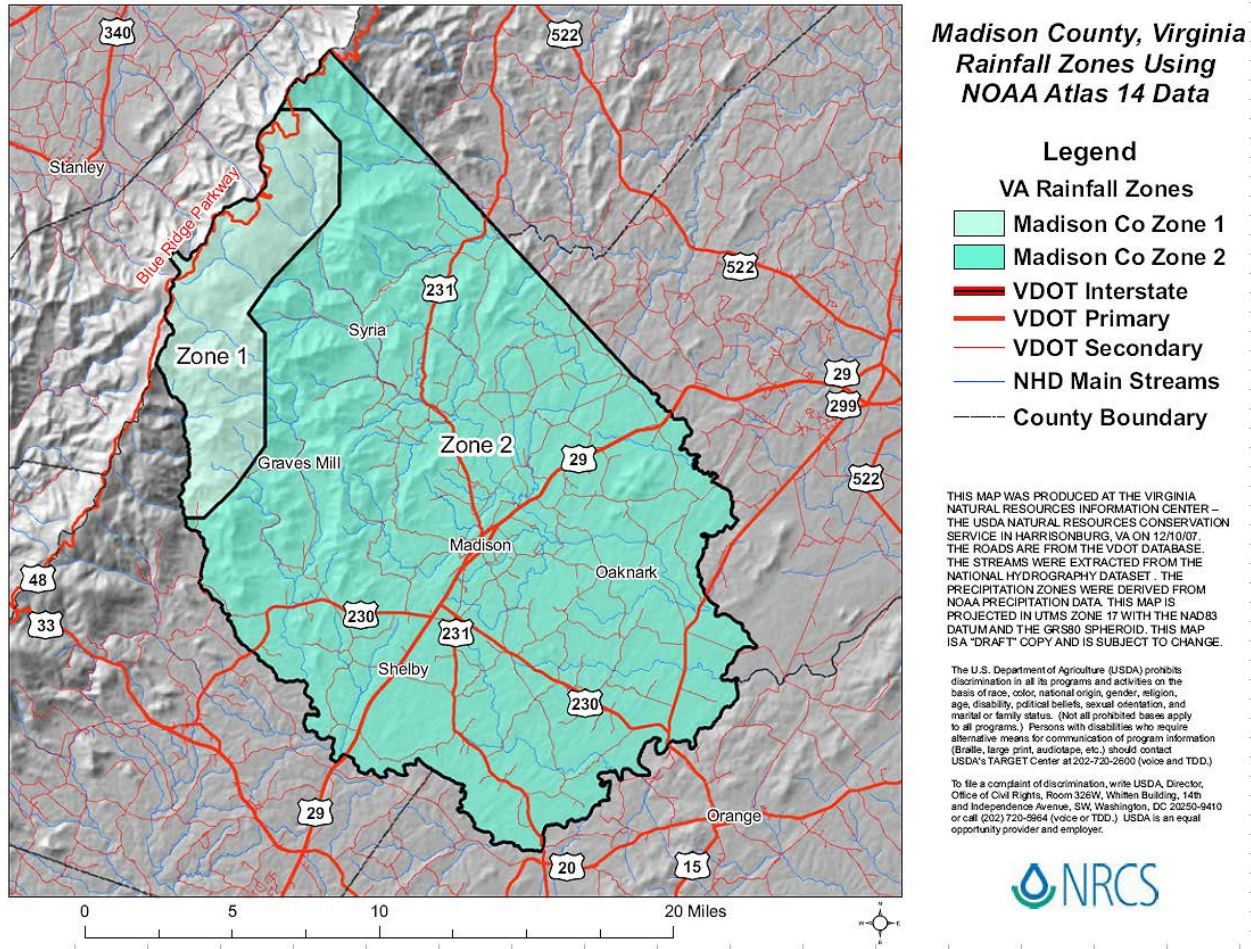


Figure 11-B.9. NRCS Rainfall Zone Map for Madison County, Virginia


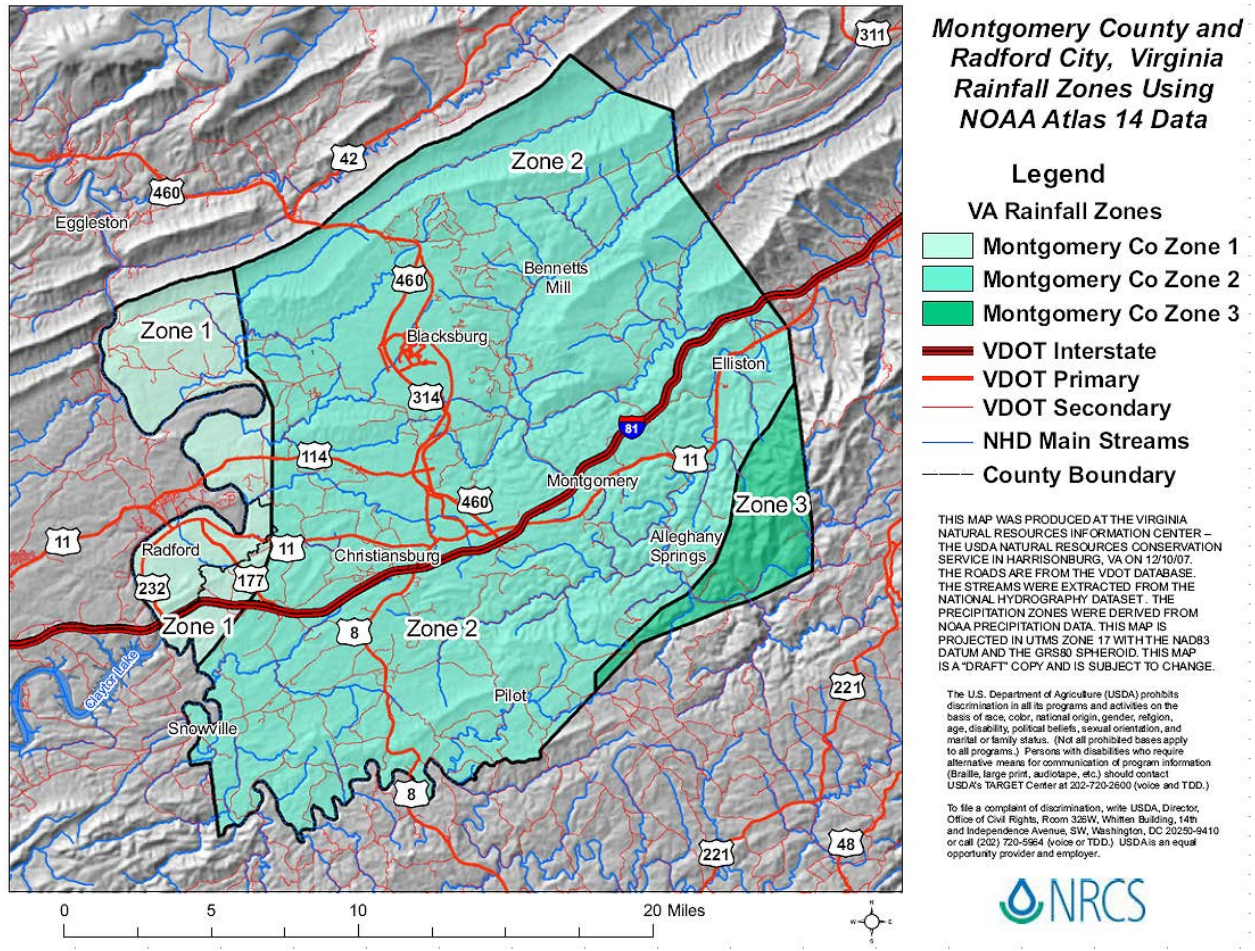


Figure 11-B.10. NRCS Rainfall Zone Map for Montgomery County, Virginia

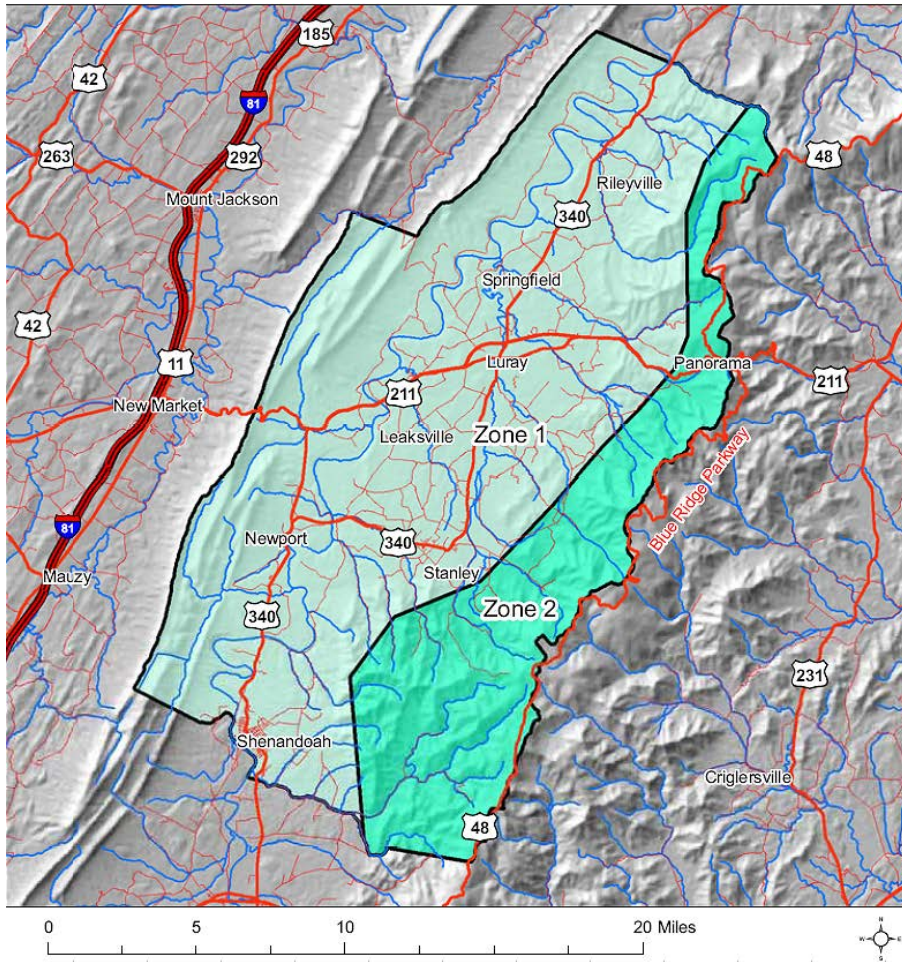

**Page County, Virginia
Rainfall Zones Using
NOAA Atlas 14 Data**

Legend

- VA Rainfall Zones
- Page Co Zone 1
- Page Co Zone 2
- VDOT Interstate
- VDOT Primary
- VDOT Secondary
- NHD Main Streams
- County Boundary

THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER – THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 12/10/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM'S ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD.) USDA is an equal opportunity provider and employer.



Figure 11-B.11. NRCS Rainfall Zone Map for Page County, Virginia

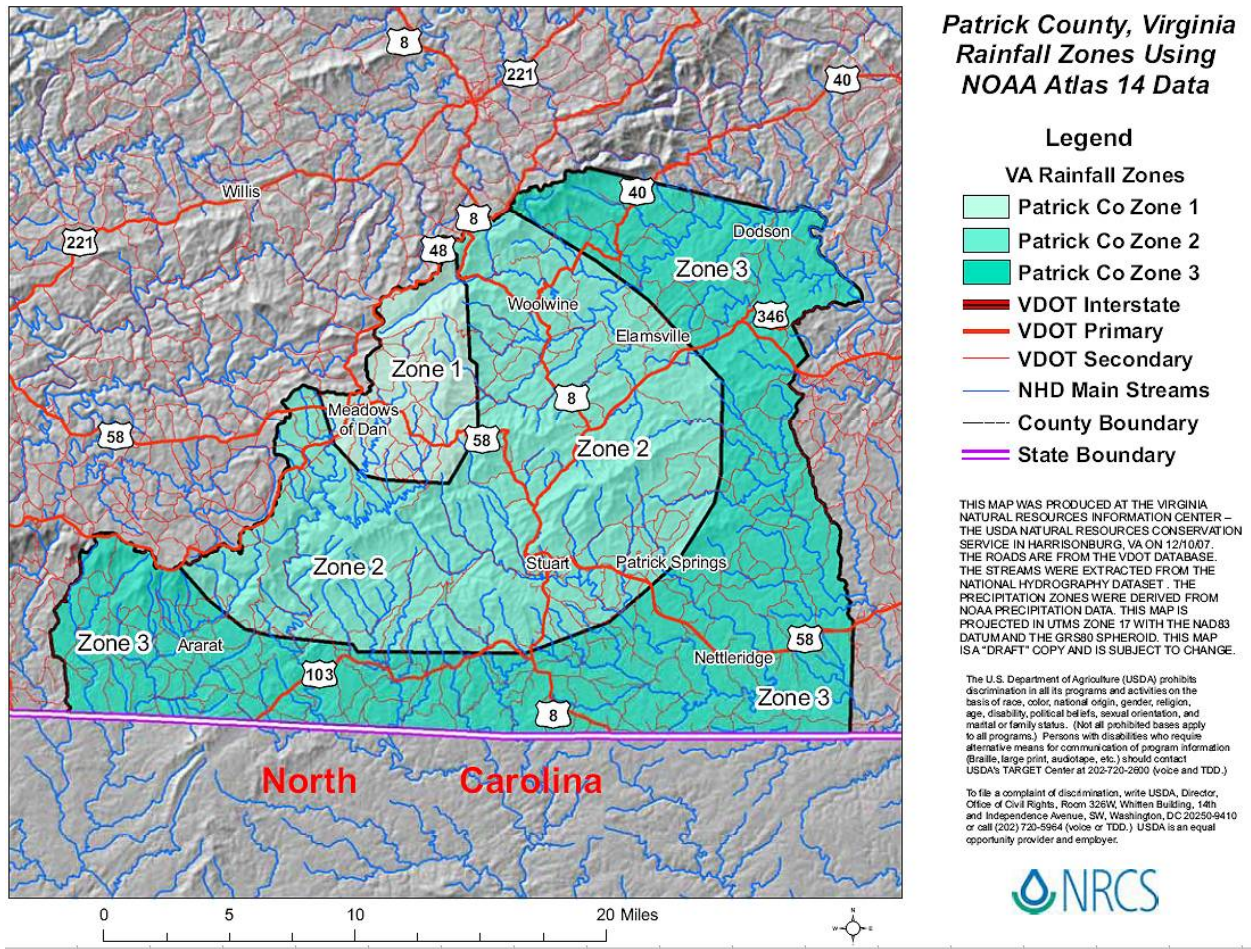


Figure 11-B.12. NRCS Rainfall Zone Map for Patrick County, Virginia


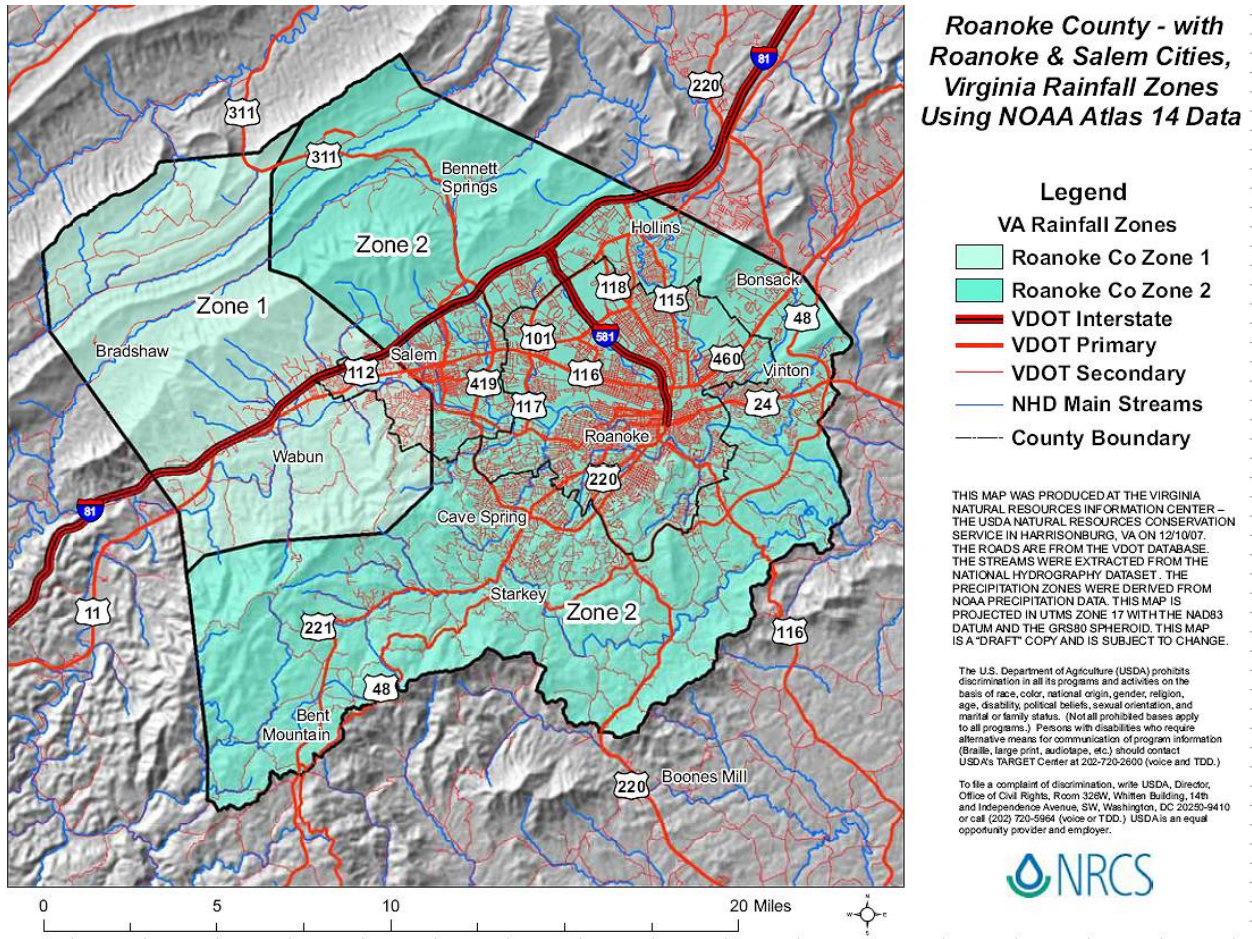


Figure 11-B.13. NRCS Rainfall Zone Map for Roanoke County, Virginia

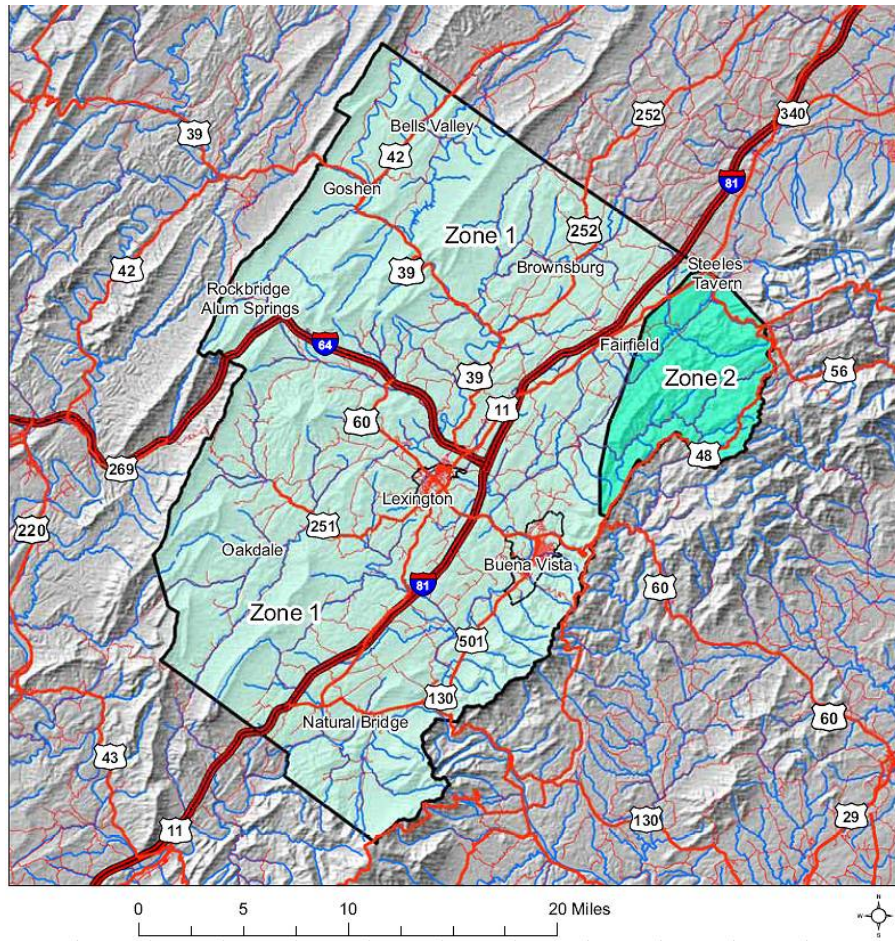

Rockbridge County Buena Vista & Lexington Cities, Virginia Rainfall Zones Using NOAA Atlas 14 Data

- Legend**
- VA Rainfall Zones
 - Rockbridge Co Zone 1
 - Rockbridge Co Zone 2
 - VDOT Interstate
 - VDOT Primary
 - VDOT Secondary
 - NHD Main Streams
 - County Boundary


THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER - THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 12/10/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM'S ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 723-5964 (voice or TDD). USDA is an equal opportunity provider and employer.



Figure 11-B.14. NRCS Rainfall Zone Map for Rockbridge County, Virginia

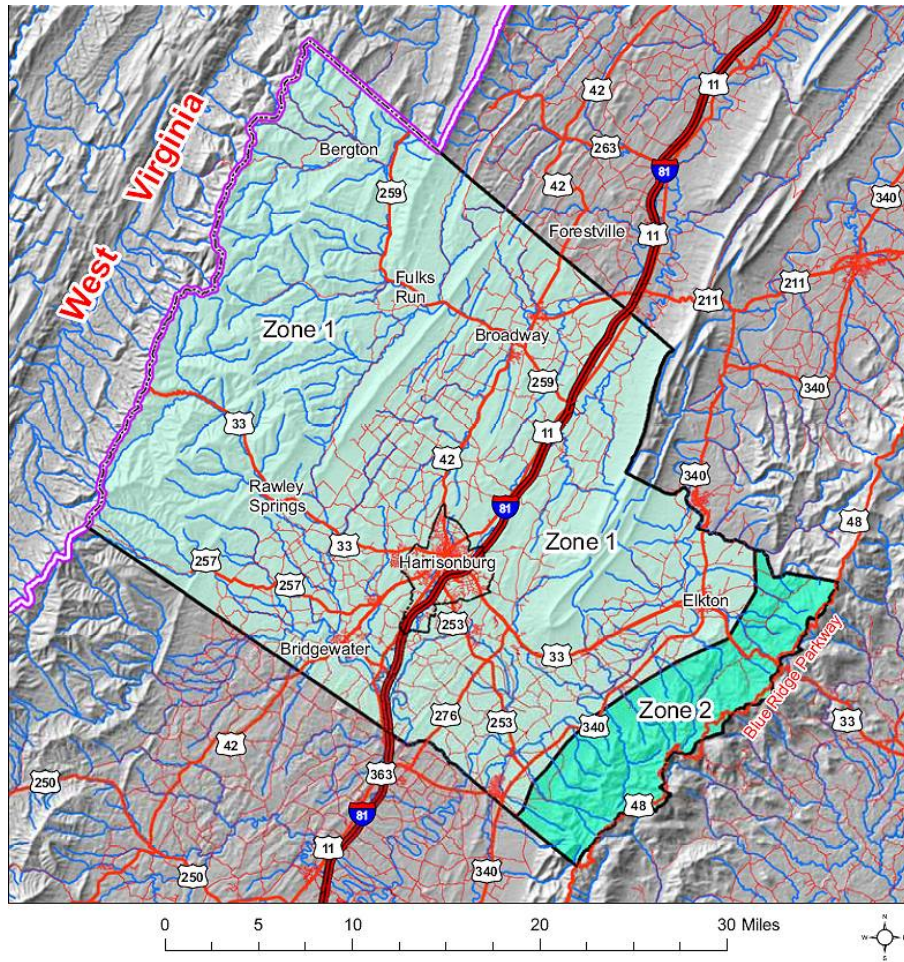

**Rockingham County & Harrisonburg City, VA
Virginia Rainfall Zones
Using NOAA Atlas 14 Data**

Legend

- VA Rainfall Zones**
- Rockingham Co Zone 1
 - Rockingham Co Zone 2
 - VDOT Interstate
 - VDOT Primary
 - VDOT Secondary
 - NHD Main Streams
 - County Boundary
 - State Boundary

THIS MAP WAS PRODUCED AT THE VIRGINIA NATURAL RESOURCES INFORMATION CENTER – THE USDA NATURAL RESOURCES CONSERVATION SERVICE IN HARRISONBURG, VA ON 12/10/07. THE ROADS ARE FROM THE VDOT DATABASE. THE STREAMS WERE EXTRACTED FROM THE NATIONAL HYDROGRAPHY DATASET. THE PRECIPITATION ZONES WERE DERIVED FROM NOAA PRECIPITATION DATA. THIS MAP IS PROJECTED IN UTM'S ZONE 17 WITH THE NAD83 DATUM AND THE GRS80 SPHEROID. THIS MAP IS A "DRAFT" COPY AND IS SUBJECT TO CHANGE.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD.)

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20255-9410 or call (202) 720-5964 (voice or TDD.) USDA is an equal opportunity provider and employer.



Figure 11-B.15. NRCS Rainfall Zone Map for Rockingham County, Virginia

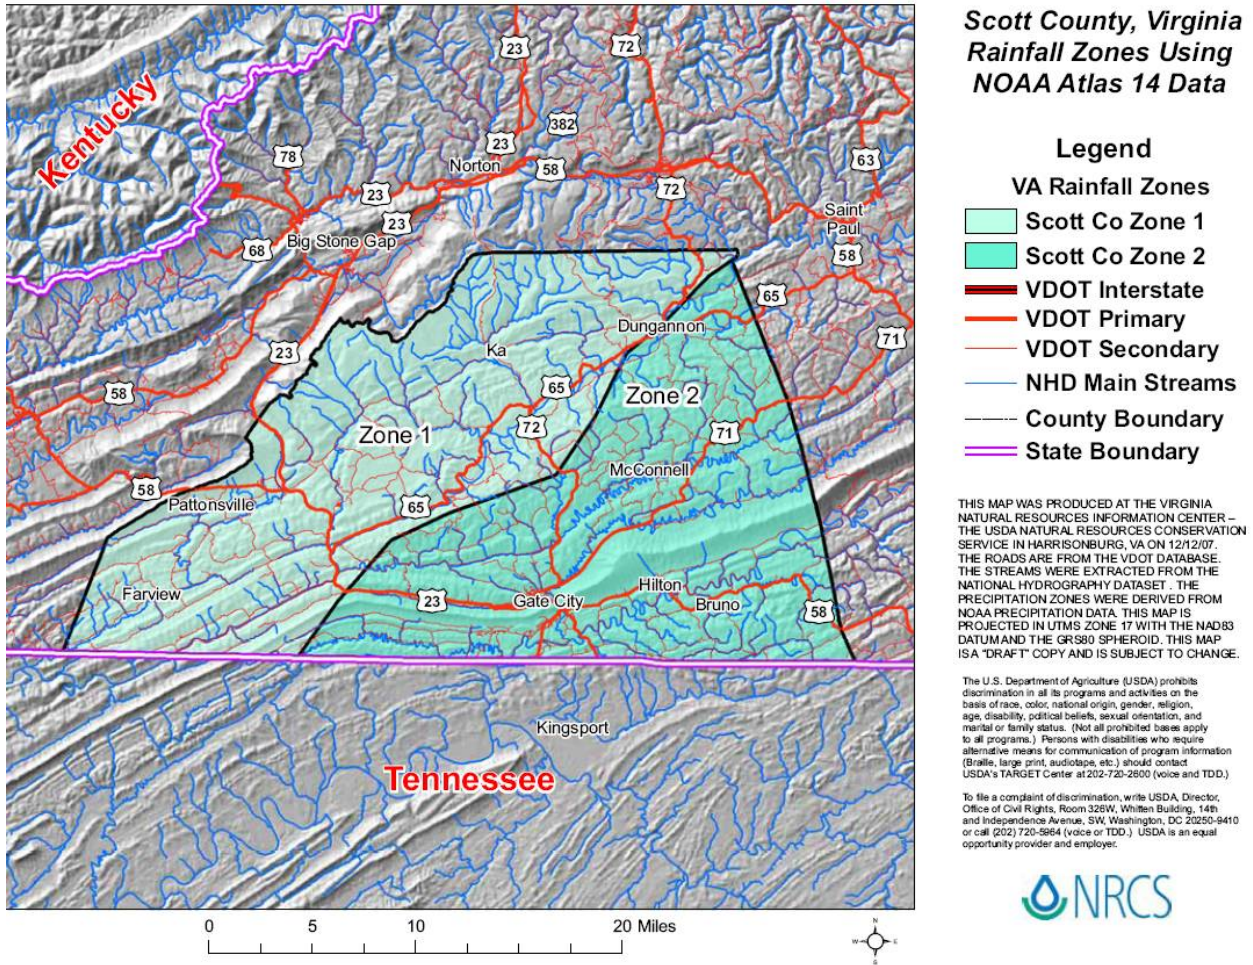


Figure 11-B.16. NRCS Rainfall Zone Map for Scott County, Virginia

Appendix 11-C

RAINFALL-RUNOFF TABLES FOR SELECTED RUNOFF CURVE NUMBERS

Table of Contents

FIGURES

Figure 11-C.1.	NRCS Graphical Solution to Determine Runoff Depth from Rainfall Depth	11-C-3
----------------	---	--------

TABLES

Table 11-C.1.	NRCS Rainfall-Runoff Table for CN = 50	11-C-4
Table 11-C.2.	NRCS Rainfall-Runoff Table for CN = 51	11-C-5
Table 11-C.3.	NRCS Rainfall-Runoff Table for CN = 52	11-C-6
Table 11-C.4.	NRCS Rainfall-Runoff Table for CN = 53	11-C-7
Table 11-C.5.	NRCS Rainfall-Runoff Table for CN = 54	11-C-8
Table 11-C.6.	NRCS Rainfall-Runoff Table for CN = 55	11-C-9
Table 11-C.7.	NRCS Rainfall-Runoff Table for CN = 56	11-C-10
Table 11-C.8.	NRCS Rainfall-Runoff Table for CN = 57	11-C-11
Table 11-C.9.	NRCS Rainfall-Runoff Table for CN = 58	11-C-12
Table 11-C.10.	NRCS Rainfall-Runoff Table for CN = 59	11-C-13
Table 11-C.11.	NRCS Rainfall-Runoff Table for CN = 60	11-C-14
Table 11-C.12.	NRCS Rainfall-Runoff Table for CN = 61	11-C-15
Table 11-C.13.	NRCS Rainfall-Runoff Table for CN = 62	11-C-16
Table 11-C.14.	NRCS Rainfall-Runoff Table for CN = 63	11-C-17
Table 11-C.15.	NRCS Rainfall-Runoff Table for CN = 64	11-C-18
Table 11-C.16.	NRCS Rainfall-Runoff Table for CN = 65	11-C-19
Table 11-C.17.	NRCS Rainfall-Runoff Table for CN = 66	11-C-20
Table 11-C.18.	NRCS Rainfall-Runoff Table for CN = 67	11-C-21
Table 11-C.19.	NRCS Rainfall-Runoff Table for CN = 68	11-C-22
Table 11-C.20.	NRCS Rainfall-Runoff Table for CN = 69	11-C-23
Table 11-C.21.	NRCS Rainfall-Runoff Table for CN = 70	11-C-24
Table 11-C.22.	NRCS Rainfall-Runoff Table for CN = 71	11-C-25
Table 11-C.23.	NRCS Rainfall-Runoff Table for CN = 72	11-C-26
Table 11-C.24.	NRCS Rainfall-Runoff Table for CN = 73	11-C-27
Table 11-C.25.	NRCS Rainfall-Runoff Table for CN = 74	11-C-28
Table 11-C.26.	NRCS Rainfall-Runoff Table for CN = 75	11-C-29
Table 11-C.27.	NRCS Rainfall-Runoff Table for CN = 76	11-C-30
Table 11-C.28.	NRCS Rainfall-Runoff Table for CN = 77	11-C-31
Table 11-C.29.	NRCS Rainfall-Runoff Table for CN = 78	11-C-32
Table 11-C.30.	NRCS Rainfall-Runoff Table for CN = 79	11-C-33
Table 11-C.31.	NRCS Rainfall-Runoff Table for CN = 80	11-C-34
Table 11-C.32.	NRCS Rainfall-Runoff Table for CN = 81	11-C-35
Table 11-C.33.	NRCS Rainfall-Runoff Table for CN = 82	11-C-36
Table 11-C.34.	NRCS Rainfall-Runoff Table for CN = 83	11-C-37

Table 11-C.35.	NRCS Rainfall-Runoff Table for CN = 84	11-C-38
Table 11-C.36.	NRCS Rainfall-Runoff Table for CN = 85	11-C-39
Table 11-C.37.	NRCS Rainfall-Runoff Table for CN = 86	11-C-40
Table 11-C.38.	NRCS Rainfall-Runoff Table for CN = 87	11-C-41
Table 11-C.39.	NRCS Rainfall-Runoff Table for CN = 88	11-C-42
Table 11-C.40.	NRCS Rainfall-Runoff Table for CN = 89	11-C-43
Table 11-C.41.	NRCS Rainfall-Runoff Table for CN = 90	11-C-44
Table 11-C.42.	NRCS Rainfall-Runoff Table for CN = 91	11-C-45
Table 11-C.43.	NRCS Rainfall-Runoff Table for CN = 92	11-C-46
Table 11-C.44.	NRCS Rainfall-Runoff Table for CN = 93	11-C-47
Table 11-C.45.	NRCS Rainfall-Runoff Table for CN = 94	11-C-48
Table 11-C.46.	NRCS Rainfall-Runoff Table for CN = 95	11-C-49
Table 11-C.47.	NRCS Rainfall-Runoff Table for CN = 96	11-C-50
Table 11-C.48.	NRCS Rainfall-Runoff Table for CN = 97	11-C-51
Table 11-C.49.	NRCS Rainfall-Runoff Table for CN = 98	11-C-52

The USDA-Natural Resources Conservation Service's *National Engineering Handbook*, Part 630, Hydrology, chapter 10, publishes figure 10–2 (**Figure 11-C.1** below) for estimating direct runoff from rainfall for selected runoff curve numbers. Many users find it more convenient to work with the tables that follow in this appendix, which were published by the NRCS in 1960 and revised in 1976. The tables show runoff amounts from rainfall quantities up to 40 inches and for runoff curve numbers 50 to 98, inclusive. In most cases the tables give more exact solutions than can be interpolated from the graph in **Figure 11-C.1**. The runoff value was determined using the equation:

$$Q = \frac{(P - 0.2S)^2}{P + 0.8S}$$

Where: Q = Depth of runoff (inches)

P = Depth of rainfall (inches)

S = Maximum potential retention (inches)

Figure 10–2 ES-1001 graphical solution of the equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

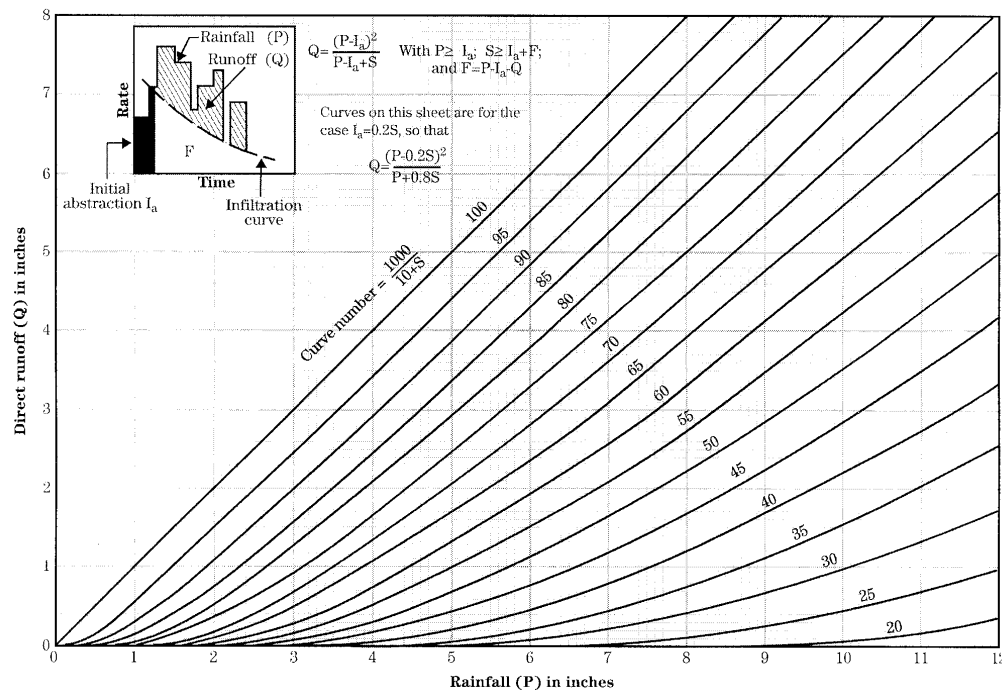


Figure 11-C.1. NRCS Graphical Solution to Determine Runoff Depth from Rainfall Depth

Table 11-C.1. NRCS Rainfall-Runoff Table for CN = 50

Curve
50

Runoff for inches of rainfall—Curve no. 50

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1										
2	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.05	0.06	0.07
3	0.09	0.11	0.13	0.15	0.17	0.20	0.22	0.25	0.27	0.30
4	0.33	0.36	0.40	0.43	0.46	0.50	0.54	0.57	0.61	0.65
5	0.69	0.73	0.78	0.82	0.86	0.91	0.95	1.00	1.05	1.09
6	1.14	1.19	1.24	1.29	1.34	1.40	1.45	1.50	1.56	1.61
7	1.67	1.72	1.78	1.84	1.89	1.95	2.01	2.07	2.13	2.19
8	2.25	2.31	2.37	2.43	2.50	2.56	2.62	2.69	2.75	2.82
9	2.88	2.95	3.01	3.08	3.15	3.21	3.28	3.35	3.42	3.49
10	3.56	3.62	3.69	3.76	3.83	3.91	3.98	4.05	4.12	4.19
11	4.26	4.34	4.41	4.48	4.55	4.63	4.70	4.78	4.85	4.93
12	5.00	5.08	5.15	5.23	5.30	5.38	5.45	5.53	5.61	5.68
13	5.76	5.84	5.92	5.99	6.07	6.15	6.23	6.31	6.39	6.47
14	6.55	6.62	6.70	6.78	6.86	6.94	7.02	7.11	7.19	7.27
15	7.35	7.43	7.51	7.59	7.67	7.76	7.84	7.92	8.00	8.08
16	8.17	8.25	8.33	8.42	8.50	8.58	8.67	8.75	8.83	8.92
17	9.00	9.08	9.17	9.25	9.34	9.42	9.51	9.59	9.68	9.76
18	9.85	9.93	10.02	10.10	10.19	10.27	10.36	10.45	10.53	10.62
19	10.70	10.79	10.88	10.96	11.05	11.14	11.22	11.31	11.40	11.48
20	11.57	11.66	11.75	11.83	11.92	12.01	12.10	12.18	12.27	12.36
21	12.45	12.54	12.62	12.71	12.80	12.89	12.98	13.07	13.16	13.24
22	13.33	13.42	13.51	13.60	13.69	13.78	13.87	13.96	14.05	14.14
23	14.23	14.32	14.41	14.49	14.58	14.67	14.76	14.85	14.94	15.03
24	15.13	15.22	15.31	15.40	15.49	15.58	15.67	15.76	15.85	15.94
25	16.03	16.12	16.21	16.30	16.39	16.49	16.58	16.67	16.76	16.85
26	16.94	17.03	17.12	17.22	17.31	17.40	17.49	17.58	17.67	17.77
27	17.86	17.95	18.04	18.13	18.22	18.32	18.41	18.50	18.59	18.69
28	18.78	18.87	18.96	19.05	19.15	19.24	19.33	19.42	19.52	19.61
29	19.70	19.80	19.89	19.98	20.07	20.17	20.26	20.35	20.45	20.54
30	20.63	20.72	20.82	20.91	21.00	21.10	21.19	21.28	21.38	21.47
31	21.56	21.66	21.75	21.84	21.94	22.03	22.13	22.22	22.31	22.41
32	22.50	22.59	22.69	22.78	22.88	22.97	23.06	23.16	23.25	23.34
33	23.44	23.53	23.63	23.72	23.82	23.91	24.00	24.10	24.19	24.29
34	24.38	24.48	24.57	24.66	24.76	24.85	24.95	25.04	25.14	25.23
35	25.33	25.42	25.51	25.61	25.70	25.80	25.89	25.99	26.08	26.18
36	26.27	26.37	26.46	26.56	26.65	26.75	26.84	26.94	27.03	27.13
37	27.22	27.32	27.41	27.51	27.60	27.70	27.79	27.89	27.98	28.08
38	28.17	28.27	28.36	28.46	28.56	28.65	28.75	28.84	28.94	29.03
39	29.13	29.22	29.32	29.41	29.51	29.61	29.70	29.80	29.89	29.99
40	30.08	30.18	30.27	30.37	30.47	30.56	30.66	30.75	30.85	30.94

Example: 4.50 inches rainfall = 0.50 inches runoff

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.2. NRCS Rainfall-Runoff Table for CN = 51



Runoff for inches of rainfall—Curve no. 51

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1										
2	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.09
3	0.11	0.13	0.15	0.17	0.20	0.22	0.25	0.28	0.31	0.34
4	0.37	0.40	0.44	0.47	0.51	0.55	0.58	0.62	0.66	0.70
5	0.75	0.79	0.83	0.88	0.92	0.97	1.02	1.07	1.11	1.16
6	1.21	1.27	1.32	1.37	1.42	1.48	1.53	1.59	1.64	1.70
7	1.76	1.81	1.87	1.93	1.99	2.05	2.11	2.17	2.23	2.29
8	2.35	2.42	2.48	2.54	2.61	2.67	2.74	2.80	2.87	2.94
9	3.00	3.07	3.14	3.20	3.27	3.34	3.41	3.48	3.55	3.62
10	3.69	3.76	3.83	3.90	3.97	4.05	4.12	4.19	4.26	4.34
11	4.41	4.48	4.56	4.63	4.71	4.78	4.86	4.93	5.01	5.08
12	5.16	5.24	5.31	5.39	5.47	5.54	5.62	5.70	5.78	5.85
13	5.93	6.01	6.09	6.17	6.25	6.33	6.41	6.49	6.57	6.65
14	6.73	6.81	6.89	6.97	7.05	7.13	7.21	7.29	7.37	7.46
15	7.54	7.62	7.70	7.79	7.87	7.95	8.03	8.12	8.20	8.28
16	8.37	8.45	8.53	8.62	8.70	8.79	8.87	8.95	9.04	9.12
17	9.21	9.29	9.38	9.46	9.55	9.63	9.72	9.81	9.89	9.98
18	10.06	10.15	10.24	10.32	10.41	10.49	10.58	10.67	10.75	10.84
19	10.93	11.02	11.10	11.19	11.28	11.36	11.45	11.54	11.63	11.72
20	11.80	11.89	11.98	12.07	12.16	12.24	12.33	12.42	12.51	12.60
21	12.69	12.78	12.86	12.95	13.04	13.13	13.22	13.31	13.40	13.49
22	13.58	13.67	13.76	13.85	13.94	14.03	14.12	14.21	14.30	14.39
23	14.48	14.57	14.66	14.75	14.84	14.93	15.02	15.11	15.20	15.29
24	15.38	15.47	15.56	15.66	15.75	15.84	15.93	16.02	16.11	16.20
25	16.29	16.38	16.48	16.57	16.66	16.75	16.84	16.93	17.03	17.12
26	17.21	17.30	17.39	17.49	17.58	17.67	17.76	17.85	17.95	18.04
27	18.13	18.22	18.32	18.41	18.50	18.59	18.69	18.78	18.87	18.96
28	19.06	19.15	19.24	19.33	19.43	19.52	19.61	19.71	19.80	19.89
29	19.99	20.08	20.17	20.26	20.36	20.45	20.54	20.64	20.73	20.82
30	20.92	21.01	21.11	21.20	21.29	21.39	21.48	21.57	21.67	21.76
31	21.86	21.95	22.04	22.14	22.23	22.32	22.42	22.51	22.61	22.70
32	22.79	22.89	22.98	23.08	23.17	23.27	23.36	23.45	23.55	23.64
33	23.74	23.83	23.93	24.02	24.12	24.21	24.30	24.40	24.49	24.59
34	24.68	24.78	24.87	24.97	25.06	25.16	25.25	25.35	25.44	25.54
35	25.63	25.73	25.82	25.92	26.01	26.11	26.20	26.30	26.39	26.49
36	26.58	26.68	26.77	26.87	26.96	27.06	27.15	27.25	27.34	27.44
37	27.53	27.63	27.73	27.82	27.92	28.01	28.11	28.20	28.30	28.39
38	28.49	28.58	28.68	28.78	28.87	28.97	29.06	29.16	29.25	29.35
39	29.45	29.54	29.64	29.73	29.83	29.93	30.02	30.12	30.21	30.31
40	30.40	30.50	30.60	30.69	30.79	30.88	30.98	31.08	31.17	31.27

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.3. NRCS Rainfall-Runoff Table for CN = 52



Runoff for inches of rainfall—Curve no. 52

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1										
2	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.09	0.11
3	0.13	0.15	0.17	0.20	0.22	0.25	0.28	0.31	0.34	0.37
4	0.41	0.44	0.48	0.52	0.55	0.59	0.63	0.67	0.72	0.76
5	0.80	0.85	0.89	0.94	0.99	1.04	1.09	1.14	1.19	1.24
6	1.29	1.34	1.40	1.45	1.50	1.56	1.62	1.67	1.73	1.79
7	1.85	1.91	1.97	2.03	2.09	2.15	2.21	2.27	2.33	2.40
8	2.46	2.53	2.59	2.66	2.72	2.79	2.85	2.92	2.99	3.06
9	3.12	3.19	3.26	3.33	3.40	3.47	3.54	3.61	3.68	3.75
10	3.82	3.90	3.97	4.04	4.11	4.19	4.26	4.33	4.41	4.48
11	4.56	4.63	4.71	4.78	4.86	4.94	5.01	5.09	5.16	5.24
12	5.32	5.40	5.47	5.55	5.63	5.71	5.79	5.87	5.94	6.02
13	6.10	6.18	6.26	6.34	6.42	6.50	6.58	6.66	6.75	6.83
14	6.91	6.99	7.07	7.15	7.23	7.32	7.40	7.48	7.56	7.65
15	7.73	7.81	7.90	7.98	8.06	8.15	8.23	8.31	8.40	8.48
16	8.57	8.65	8.74	8.82	8.91	8.99	9.08	9.16	9.25	9.33
17	9.42	9.50	9.59	9.68	9.76	9.85	9.93	10.02	10.11	10.19
18	10.28	10.37	10.45	10.54	10.63	10.72	10.80	10.89	10.98	11.07
19	11.15	11.24	11.33	11.42	11.50	11.59	11.68	11.77	11.86	11.95
20	12.04	12.12	12.21	12.30	12.39	12.48	12.57	12.66	12.75	12.84
21	12.93	13.01	13.10	13.19	13.28	13.37	13.46	13.55	13.64	13.73
22	13.82	13.91	14.00	14.09	14.18	14.27	14.37	14.46	14.55	14.64
23	14.73	14.82	14.91	15.00	15.09	15.18	15.27	15.36	15.46	15.55
24	15.64	15.73	15.82	15.91	16.00	16.10	16.19	16.28	16.37	16.46
25	16.55	16.65	16.74	16.83	16.92	17.01	17.11	17.20	17.29	17.38
26	17.48	17.57	17.66	17.75	17.85	17.94	18.03	18.12	18.22	18.31
27	18.40	18.49	18.59	18.68	18.77	18.87	18.96	19.05	19.15	19.24
28	19.33	19.42	19.52	19.61	19.70	19.80	19.89	19.98	20.08	20.17
29	20.27	20.36	20.45	20.55	20.64	20.73	20.83	20.92	21.02	21.11
30	21.20	21.30	21.39	21.48	21.58	21.67	21.77	21.86	21.96	22.05
31	22.14	22.24	22.33	22.43	22.52	22.61	22.71	22.80	22.90	22.99
32	23.09	23.18	23.28	23.37	23.47	23.56	23.65	23.75	23.84	23.94
33	24.03	24.13	24.22	24.32	24.41	24.51	24.60	24.70	24.79	24.89
34	24.98	25.08	25.17	25.27	25.36	25.46	25.55	25.65	25.74	25.84
35	25.93	26.03	26.12	26.22	26.32	26.41	26.51	26.60	26.70	26.79
36	26.89	26.98	27.08	27.17	27.27	27.37	27.46	27.56	27.65	27.75
37	27.84	27.94	28.03	28.13	28.23	28.32	28.42	28.51	28.61	28.71
38	28.80	28.90	28.99	29.09	29.18	29.28	29.38	29.47	29.57	29.66
39	29.76	29.86	29.95	30.05	30.14	30.24	30.34	30.43	30.53	30.63
40	30.72	30.82	30.91	31.01	31.11	31.20	31.30	31.40	31.49	31.59

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.4. NRCS Rainfall-Runoff Table for CN = 53

Curve
53

Runoff for inches of rainfall—Curve no. 53

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1										
2	0.01	0.01	0.02	0.03	0.04	0.05	0.07	0.09	0.11	0.13
3	0.15	0.17	0.20	0.22	0.25	0.28	0.31	0.34	0.38	0.41
4	0.45	0.48	0.52	0.56	0.60	0.64	0.68	0.73	0.77	0.81
5	0.86	0.91	0.95	1.00	1.05	1.10	1.15	1.20	1.26	1.31
6	1.36	1.42	1.47	1.53	1.59	1.64	1.70	1.76	1.82	1.88
7	1.94	2.00	2.06	2.12	2.18	2.25	2.31	2.37	2.44	2.50
8	2.57	2.63	2.70	2.77	2.83	2.90	2.97	3.04	3.11	3.17
9	3.24	3.31	3.38	3.45	3.53	3.60	3.67	3.74	3.81	3.89
10	3.96	4.03	4.10	4.18	4.25	4.33	4.40	4.48	4.55	4.63
11	4.70	4.78	4.86	4.93	5.01	5.09	5.16	5.24	5.32	5.40
12	5.48	5.55	5.63	5.71	5.79	5.87	5.95	6.03	6.11	6.19
13	6.27	6.35	6.43	6.51	6.59	6.68	6.76	6.84	6.92	7.00
14	7.09	7.17	7.25	7.33	7.42	7.50	7.58	7.67	7.75	7.83
15	7.92	8.00	8.08	8.17	8.25	8.34	8.42	8.51	8.59	8.68
16	8.76	8.85	8.93	9.02	9.10	9.19	9.28	9.36	9.45	9.53
17	9.62	9.71	9.79	9.88	9.97	10.05	10.14	10.23	10.32	10.40
18	10.49	10.58	10.67	10.75	10.84	10.93	11.02	11.11	11.19	11.28
19	11.37	11.46	11.55	11.64	11.73	11.81	11.90	11.99	12.08	12.17
20	12.26	12.35	12.44	12.53	12.62	12.71	12.80	12.89	12.98	13.07
21	13.16	13.25	13.34	13.43	13.52	13.61	13.70	13.79	13.88	13.97
22	14.06	14.15	14.24	14.33	14.42	14.51	14.61	14.70	14.79	14.88
23	14.97	15.06	15.15	15.24	15.34	15.43	15.52	15.61	15.70	15.79
24	15.89	15.98	16.07	16.16	16.25	16.35	16.44	16.53	16.62	16.71
25	16.81	16.90	16.99	17.08	17.18	17.27	17.36	17.45	17.55	17.64
26	17.73	17.83	17.92	18.01	18.10	18.20	18.29	18.38	18.48	18.57
27	18.66	18.76	18.85	18.94	19.04	19.13	19.22	19.32	19.41	19.50
28	19.60	19.69	19.79	19.88	19.97	20.07	20.16	20.25	20.35	20.44
29	20.54	20.63	20.72	20.82	20.91	21.01	21.10	21.19	21.29	21.38
30	21.48	21.57	21.67	21.76	21.85	21.95	22.04	22.14	22.23	22.33
31	22.42	22.52	22.61	22.71	22.80	22.89	22.99	23.08	23.18	23.27
32	23.37	23.46	23.56	23.65	23.75	23.84	23.94	24.03	24.13	24.22
33	24.32	24.41	24.51	24.60	24.70	24.79	24.89	24.98	25.08	25.18
34	25.27	25.37	25.46	25.56	25.65	25.75	25.84	25.94	26.03	26.13
35	26.22	26.32	26.42	26.51	26.61	26.70	26.80	26.89	26.99	27.09
36	27.18	27.28	27.37	27.47	27.56	27.66	27.76	27.85	27.95	28.04
37	28.14	28.24	28.33	28.43	28.52	28.62	28.72	28.81	28.91	29.00
38	29.10	29.20	29.29	29.39	29.49	29.58	29.68	29.77	29.87	29.97
39	30.06	30.16	30.26	30.35	30.45	30.54	30.64	30.74	30.83	30.93
40	31.03	31.12	31.22	31.32	31.41	31.51	31.61	31.70	31.80	31.90

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.5. NRCS Rainfall-Runoff Table for CN = 54



Runoff for inches of rainfall—Curve no. 54

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1										
2	0.01	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.12	0.15
3	0.17	0.20	0.22	0.25	0.28	0.31	0.35	0.38	0.41	0.45
4	0.49	0.53	0.57	0.61	0.65	0.69	0.73	0.78	0.83	0.87
5	0.92	0.97	1.02	1.07	1.12	1.17	1.22	1.28	1.33	1.38
6	1.44	1.50	1.55	1.61	1.67	1.73	1.79	1.85	1.91	1.97
7	2.03	2.09	2.16	2.22	2.28	2.35	2.41	2.48	2.54	2.61
8	2.68	2.74	2.81	2.88	2.95	3.02	3.08	3.15	3.22	3.29
9	3.37	3.44	3.51	3.58	3.65	3.73	3.80	3.87	3.94	4.02
10	4.09	4.17	4.24	4.32	4.39	4.47	4.54	4.62	4.70	4.77
11	4.85	4.93	5.01	5.08	5.16	5.24	5.32	5.40	5.48	5.55
12	5.63	5.71	5.79	5.87	5.95	6.03	6.11	6.20	6.28	6.36
13	6.44	6.52	6.60	6.68	6.77	6.85	6.93	7.01	7.10	7.18
14	7.26	7.35	7.43	7.51	7.60	7.68	7.77	7.85	7.93	8.02
15	8.10	8.19	8.27	8.36	8.44	8.53	8.61	8.70	8.79	8.87
16	8.96	9.04	9.13	9.22	9.30	9.39	9.48	9.56	9.65	9.74
17	9.82	9.91	10.00	10.09	10.17	10.26	10.35	10.44	10.52	10.61
18	10.70	10.79	10.88	10.97	11.05	11.14	11.23	11.32	11.41	11.50
19	11.59	11.68	11.77	11.86	11.94	12.03	12.12	12.21	12.30	12.39
20	12.48	12.57	12.66	12.75	12.84	12.93	13.02	13.11	13.20	13.30
21	13.39	13.48	13.57	13.66	13.75	13.84	13.93	14.02	14.11	14.20
22	14.30	14.39	14.48	14.57	14.66	14.75	14.84	14.94	15.03	15.12
23	15.21	15.30	15.39	15.49	15.58	15.67	15.76	15.85	15.95	16.04
24	16.13	16.22	16.32	16.41	16.50	16.59	16.69	16.78	16.87	16.96
25	17.06	17.15	17.24	17.34	17.43	17.52	17.62	17.71	17.80	17.89
26	17.99	18.08	18.17	18.27	18.36	18.45	18.55	18.64	18.74	18.83
27	18.92	19.02	19.11	19.20	19.30	19.39	19.49	19.58	19.67	19.77
28	19.86	19.96	20.05	20.14	20.24	20.33	20.43	20.52	20.61	20.71
29	20.80	20.90	20.99	21.09	21.18	21.27	21.37	21.46	21.56	21.65
30	21.75	21.84	21.94	22.03	22.13	22.22	22.32	22.41	22.51	22.60
31	22.70	22.79	22.89	22.98	23.08	23.17	23.27	23.36	23.46	23.55
32	23.65	23.74	23.84	23.93	24.03	24.12	24.22	24.31	24.41	24.50
33	24.60	24.69	24.79	24.89	24.98	25.08	25.17	25.27	25.36	25.46
34	25.55	25.65	25.75	25.84	25.94	26.03	26.13	26.22	26.32	26.42
35	26.51	26.61	26.70	26.80	26.90	26.99	27.09	27.18	27.28	27.38
36	27.47	27.57	27.66	27.76	27.86	27.95	28.05	28.14	28.24	28.34
37	28.43	28.53	28.63	28.72	28.82	28.91	29.01	29.11	29.20	29.30
38	29.40	29.49	29.59	29.68	29.78	29.88	29.97	30.07	30.17	30.26
39	30.36	30.46	30.55	30.65	30.75	30.84	30.94	31.04	31.13	31.23
40	31.33	31.42	31.52	31.62	31.71	31.81	31.91	32.00	32.10	32.20

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.6. NRCS Rainfall-Runoff Table for CN = 55



Runoff for inches of rainfall—Curve no. 55

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
2	0.02	0.02	0.04	0.05	0.07	0.08	0.10	0.12	0.15	0.17
3	0.19	0.22	0.25	0.28	0.31	0.35	0.38	0.42	0.45	0.49
4	0.53	0.57	0.61	0.65	0.70	0.74	0.79	0.83	0.88	0.93
5	0.98	1.03	1.08	1.13	1.19	1.24	1.29	1.35	1.40	1.46
6	1.52	1.58	1.63	1.69	1.75	1.81	1.87	1.94	2.00	2.06
7	2.12	2.19	2.25	2.32	2.38	2.45	2.51	2.58	2.65	2.72
8	2.78	2.85	2.92	2.99	3.06	3.13	3.20	3.27	3.34	3.42
9	3.49	3.56	3.63	3.71	3.78	3.85	3.93	4.00	4.08	4.15
10	4.23	4.30	4.38	4.46	4.53	4.61	4.69	4.76	4.84	4.92
11	5.00	5.08	5.15	5.23	5.31	5.39	5.47	5.55	5.63	5.71
12	5.79	5.87	5.95	6.03	6.12	6.20	6.28	6.36	6.44	6.53
13	6.61	6.69	6.77	6.86	6.94	7.02	7.11	7.19	7.27	7.36
14	7.44	7.53	7.61	7.69	7.78	7.86	7.95	8.03	8.12	8.20
15	8.29	8.38	8.46	8.55	8.63	8.72	8.81	8.89	8.98	9.07
16	9.15	9.24	9.33	9.41	9.50	9.59	9.68	9.76	9.85	9.94
17	10.03	10.11	10.20	10.29	10.38	10.47	10.56	10.64	10.73	10.82
18	10.91	11.00	11.09	11.18	11.27	11.36	11.45	11.53	11.62	11.71
19	11.80	11.89	11.98	12.07	12.16	12.25	12.34	12.43	12.52	12.61
20	12.70	12.80	12.89	12.98	13.07	13.16	13.25	13.34	13.43	13.52
21	13.61	13.70	13.80	13.89	13.98	14.07	14.16	14.25	14.34	14.44
22	14.53	14.62	14.71	14.80	14.90	14.99	15.08	15.17	15.26	15.36
23	15.45	15.54	15.63	15.73	15.82	15.91	16.00	16.10	16.19	16.28
24	16.37	16.47	16.56	16.65	16.75	16.84	16.93	17.03	17.12	17.21
25	17.31	17.40	17.49	17.59	17.68	17.77	17.87	17.96	18.05	18.15
26	18.24	18.33	18.43	18.52	18.62	18.71	18.80	18.90	18.99	19.08
27	19.18	19.27	19.37	19.46	19.56	19.65	19.74	19.84	19.93	20.03
28	20.12	20.22	20.31	20.40	20.50	20.59	20.69	20.78	20.88	20.97
29	21.07	21.16	21.26	21.35	21.45	21.54	21.64	21.73	21.83	21.92
30	22.02	22.11	22.21	22.30	22.40	22.49	22.59	22.68	22.78	22.87
31	22.97	23.06	23.16	23.25	23.35	23.44	23.54	23.63	23.73	23.82
32	23.92	24.02	24.11	24.21	24.30	24.40	24.49	24.59	24.68	24.78
33	24.88	24.97	25.07	25.16	25.26	25.35	25.45	25.55	25.64	25.74
34	25.83	25.93	26.03	26.12	26.22	26.31	26.41	26.51	26.60	26.70
35	26.79	26.89	26.99	27.08	27.18	27.28	27.37	27.47	27.56	27.66
36	27.76	27.85	27.95	28.05	28.14	28.24	28.33	28.43	28.53	28.62
37	28.72	28.82	28.91	29.01	29.11	29.20	29.30	29.40	29.49	29.59
38	29.69	29.78	29.88	29.98	30.07	30.17	30.27	30.36	30.46	30.56
39	30.65	30.75	30.85	30.94	31.04	31.14	31.23	31.33	31.43	31.52
40	31.62	31.72	31.82	31.91	32.01	32.11	32.20	32.30	32.40	32.49

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.7. NRCS Rainfall-Runoff Table for CN = 56

Curve
56

Runoff for inches of rainfall—Curve no. 56

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01
2	0.02	0.03	0.05	0.06	0.08	0.10	0.12	0.14	0.17	0.19
3	0.22	0.25	0.28	0.31	0.34	0.38	0.42	0.45	0.49	0.53
4	0.57	0.62	0.66	0.70	0.75	0.79	0.84	0.89	0.94	0.99
5	1.04	1.09	1.15	1.20	1.25	1.31	1.36	1.42	1.48	1.54
6	1.60	1.66	1.72	1.78	1.84	1.90	1.96	2.02	2.09	2.15
7	2.22	2.28	2.35	2.41	2.48	2.55	2.62	2.68	2.75	2.82
8	2.89	2.96	3.03	3.10	3.17	3.25	3.32	3.39	3.46	3.54
9	3.61	3.68	3.76	3.83	3.91	3.98	4.06	4.13	4.21	4.28
10	4.36	4.44	4.51	4.59	4.67	4.75	4.83	4.90	4.98	5.06
11	5.14	5.22	5.30	5.38	5.46	5.54	5.62	5.70	5.78	5.86
12	5.95	6.03	6.11	6.19	6.27	6.36	6.44	6.52	6.60	6.69
13	6.77	6.85	6.94	7.02	7.11	7.19	7.27	7.36	7.44	7.53
14	7.61	7.70	7.78	7.87	7.95	8.04	8.13	8.21	8.30	8.38
15	8.47	8.56	8.64	8.73	8.82	8.90	8.99	9.08	9.16	9.25
16	9.34	9.43	9.52	9.60	9.69	9.78	9.87	9.96	10.04	10.13
17	10.22	10.31	10.40	10.49	10.58	10.67	10.75	10.84	10.93	11.02
18	11.11	11.20	11.29	11.38	11.47	11.56	11.65	11.74	11.83	11.92
19	12.01	12.10	12.19	12.28	12.37	12.46	12.55	12.65	12.74	12.83
20	12.92	13.01	13.10	13.19	13.28	13.37	13.47	13.56	13.65	13.74
21	13.83	13.92	14.02	14.11	14.20	14.29	14.38	14.48	14.57	14.66
22	14.75	14.84	14.94	15.03	15.12	15.21	15.31	15.40	15.49	15.58
23	15.68	15.77	15.86	15.96	16.05	16.14	16.24	16.33	16.42	16.51
24	16.61	16.70	16.79	16.89	16.98	17.07	17.17	17.26	17.36	17.45
25	17.54	17.64	17.73	17.82	17.92	18.01	18.11	18.20	18.29	18.39
26	18.48	18.58	18.67	18.76	18.86	18.95	19.05	19.14	19.24	19.33
27	19.42	19.52	19.61	19.71	19.80	19.90	19.99	20.09	20.18	20.28
28	20.37	20.46	20.56	20.65	20.75	20.84	20.94	21.03	21.13	21.22
29	21.32	21.41	21.51	21.60	21.70	21.79	21.89	21.98	22.08	22.18
30	22.27	22.37	22.46	22.56	22.65	22.75	22.84	22.94	23.03	23.13
31	23.22	23.32	23.42	23.51	23.61	23.70	23.80	23.89	23.99	24.09
32	24.18	24.28	24.37	24.47	24.56	24.66	24.76	24.85	24.95	25.04
33	25.14	25.24	25.33	25.43	25.52	25.62	25.72	25.81	25.91	26.01
34	26.10	26.20	26.29	26.39	26.49	26.58	26.68	26.78	26.87	26.97
35	27.06	27.16	27.26	27.35	27.45	27.55	27.64	27.74	27.84	27.93
36	28.03	28.13	28.22	28.32	28.42	28.51	28.61	28.71	28.80	28.90
37	29.00	29.09	29.19	29.29	29.38	29.48	29.58	29.67	29.77	29.87
38	29.96	30.06	30.16	30.25	30.35	30.45	30.54	30.64	30.74	30.84
39	30.93	31.03	31.13	31.22	31.32	31.42	31.51	31.61	31.71	31.81
40	31.90	32.00	32.10	32.19	32.29	32.39	32.49	32.58	32.68	32.78

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.8. NRCS Rainfall-Runoff Table for CN = 57



Runoff for inches of rainfall—Curve no. 57

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02
2	0.03	0.04	0.06	0.08	0.09	0.12	0.14	0.16	0.19	0.22
3	0.25	0.28	0.31	0.34	0.38	0.42	0.45	0.49	0.53	0.58
4	0.62	0.66	0.71	0.75	0.80	0.85	0.90	0.95	1.00	1.05
5	1.11	1.16	1.21	1.27	1.33	1.38	1.44	1.50	1.56	1.62
6	1.68	1.74	1.80	1.86	1.93	1.99	2.05	2.12	2.18	2.25
7	2.31	2.38	2.45	2.52	2.58	2.65	2.72	2.79	2.86	2.93
8	3.00	3.07	3.15	3.22	3.29	3.36	3.44	3.51	3.59	3.66
9	3.73	3.81	3.88	3.96	4.04	4.11	4.19	4.27	4.34	4.42
10	4.50	4.58	4.65	4.73	4.81	4.89	4.97	5.05	5.13	5.21
11	5.29	5.37	5.45	5.53	5.61	5.69	5.78	5.86	5.94	6.02
12	6.10	6.19	6.27	6.35	6.44	6.52	6.60	6.69	6.77	6.85
13	6.94	7.02	7.11	7.19	7.28	7.36	7.45	7.53	7.62	7.70
14	7.79	7.88	7.96	8.05	8.13	8.22	8.31	8.39	8.48	8.57
15	8.66	8.74	8.83	8.92	9.00	9.09	9.18	9.27	9.36	9.44
16	9.53	9.62	9.71	9.80	9.89	9.98	10.06	10.15	10.24	10.33
17	10.42	10.51	10.60	10.69	10.78	10.87	10.96	11.05	11.14	11.23
18	11.32	11.41	11.50	11.59	11.68	11.77	11.86	11.95	12.04	12.13
19	12.22	12.31	12.41	12.50	12.59	12.68	12.77	12.86	12.95	13.04
20	13.14	13.23	13.32	13.41	13.50	13.59	13.69	13.78	13.87	13.96
21	14.06	14.15	14.24	14.33	14.42	14.52	14.61	14.70	14.79	14.89
22	14.98	15.07	15.17	15.26	15.35	15.44	15.54	15.63	15.72	15.82
23	15.91	16.00	16.10	16.19	16.28	16.38	16.47	16.56	16.66	16.75
24	16.85	16.94	17.03	17.13	17.22	17.31	17.41	17.50	17.60	17.69
25	17.78	17.88	17.97	18.07	18.16	18.25	18.35	18.44	18.54	18.63
26	18.73	18.82	18.92	19.01	19.10	19.20	19.29	19.39	19.48	19.58
27	19.67	19.77	19.86	19.96	20.05	20.15	20.24	20.34	20.43	20.53
28	20.62	20.72	20.81	20.91	21.00	21.10	21.19	21.29	21.38	21.48
29	21.57	21.67	21.77	21.86	21.96	22.05	22.15	22.24	22.34	22.43
30	22.53	22.63	22.72	22.82	22.91	23.01	23.10	23.20	23.30	23.39
31	23.49	23.58	23.68	23.77	23.87	23.97	24.06	24.16	24.25	24.35
32	24.45	24.54	24.64	24.74	24.83	24.93	25.02	25.12	25.22	25.31
33	25.41	25.50	25.60	25.70	25.79	25.89	25.99	26.08	26.18	26.28
34	26.37	26.47	26.57	26.66	26.76	26.85	26.95	27.05	27.14	27.24
35	27.34	27.43	27.53	27.63	27.72	27.82	27.92	28.01	28.11	28.21
36	28.30	28.40	28.50	28.59	28.69	28.79	28.89	28.98	29.08	29.18
37	29.27	29.37	29.47	29.56	29.66	29.76	29.85	29.95	30.05	30.15
38	30.24	30.34	30.44	30.53	30.63	30.73	30.83	30.92	31.02	31.12
39	31.21	31.31	31.41	31.51	31.60	31.70	31.80	31.90	31.99	32.09
40	32.19	32.28	32.38	32.48	32.58	32.67	32.77	32.87	32.97	33.06

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.9. NRCS Rainfall-Runoff Table for CN = 58



Runoff for inches of rainfall—Curve no. 58

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03
2	0.04	0.05	0.07	0.09	0.11	0.13	0.16	0.18	0.21	0.24
3	0.27	0.31	0.34	0.38	0.41	0.45	0.49	0.53	0.58	0.62
4	0.67	0.71	0.76	0.81	0.86	0.91	0.96	1.01	1.06	1.11
5	1.17	1.22	1.28	1.34	1.40	1.45	1.51	1.57	1.63	1.70
6	1.76	1.82	1.88	1.95	2.01	2.08	2.14	2.21	2.27	2.34
7	2.41	2.48	2.55	2.62	2.69	2.76	2.83	2.90	2.97	3.04
8	3.11	3.19	3.26	3.33	3.41	3.48	3.55	3.63	3.70	3.78
9	3.86	3.93	4.01	4.09	4.16	4.24	4.32	4.40	4.47	4.55
10	4.63	4.71	4.79	4.87	4.95	5.03	5.11	5.19	5.27	5.35
11	5.43	5.52	5.60	5.68	5.76	5.84	5.93	6.01	6.09	6.17
12	6.26	6.34	6.43	6.51	6.59	6.68	6.76	6.85	6.93	7.02
13	7.10	7.19	7.27	7.36	7.44	7.53	7.62	7.70	7.79	7.87
14	7.96	8.05	8.13	8.22	8.31	8.40	8.48	8.57	8.66	8.75
15	8.83	8.92	9.01	9.10	9.19	9.27	9.36	9.45	9.54	9.63
16	9.72	9.81	9.90	9.98	10.07	10.16	10.25	10.34	10.43	10.52
17	10.61	10.70	10.79	10.88	10.97	11.06	11.15	11.24	11.33	11.42
18	11.52	11.61	11.70	11.79	11.88	11.97	12.06	12.15	12.24	12.33
19	12.43	12.52	12.61	12.70	12.79	12.88	12.98	13.07	13.16	13.25
20	13.34	13.44	13.53	13.62	13.71	13.81	13.90	13.99	14.08	14.18
21	14.27	14.36	14.45	14.55	14.64	14.73	14.83	14.92	15.01	15.10
22	15.20	15.29	15.38	15.48	15.57	15.66	15.76	15.85	15.95	16.04
23	16.13	16.23	16.32	16.41	16.51	16.60	16.70	16.79	16.88	16.98
24	17.07	17.17	17.26	17.35	17.45	17.54	17.64	17.73	17.83	17.92
25	18.01	18.11	18.20	18.30	18.39	18.49	18.58	18.68	18.77	18.87
26	18.96	19.06	19.15	19.25	19.34	19.44	19.53	19.63	19.72	19.82
27	19.91	20.01	20.10	20.20	20.29	20.39	20.48	20.58	20.67	20.77
28	20.86	20.96	21.05	21.15	21.25	21.34	21.44	21.53	21.63	21.72
29	21.82	21.91	22.01	22.11	22.20	22.30	22.39	22.49	22.58	22.68
30	22.78	22.87	22.97	23.06	23.16	23.26	23.35	23.45	23.54	23.64
31	23.74	23.83	23.93	24.03	24.12	24.22	24.31	24.41	24.51	24.60
32	24.70	24.80	24.89	24.99	25.08	25.18	25.28	25.37	25.47	25.57
33	25.66	25.76	25.86	25.95	26.05	26.15	26.24	26.34	26.44	26.53
34	26.63	26.73	26.82	26.92	27.02	27.11	27.21	27.31	27.40	27.50
35	27.60	27.69	27.79	27.89	27.98	28.08	28.18	28.28	28.37	28.47
36	28.57	28.66	28.76	28.86	28.95	29.05	29.15	29.25	29.34	29.44
37	29.54	29.63	29.73	29.83	29.93	30.02	30.12	30.22	30.31	30.41
38	30.51	30.61	30.70	30.80	30.90	31.00	31.09	31.19	31.29	31.38
39	31.48	31.58	31.68	31.77	31.87	31.97	32.07	32.16	32.26	32.36
40	32.46	32.55	32.65	32.75	32.85	32.94	33.04	33.14	33.24	33.33

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.10. NRCS Rainfall-Runoff Table for CN = 59



Runoff for inches of rainfall—Curve no. 59

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03
2	0.05	0.07	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.27
3	0.30	0.34	0.37	0.41	0.45	0.49	0.53	0.58	0.62	0.67
4	0.71	0.76	0.81	0.86	0.91	0.96	1.01	1.07	1.12	1.18
5	1.23	1.29	1.35	1.41	1.47	1.53	1.59	1.65	1.71	1.77
6	1.84	1.90	1.97	2.03	2.10	2.17	2.23	2.30	2.37	2.44
7	2.51	2.58	2.65	2.72	2.79	2.86	2.93	3.00	3.08	3.15
8	3.22	3.30	3.37	3.45	3.52	3.60	3.67	3.75	3.82	3.90
9	3.98	4.05	4.13	4.21	4.29	4.37	4.45	4.53	4.60	4.68
10	4.76	4.84	4.92	5.01	5.09	5.17	5.25	5.33	5.41	5.49
11	5.58	5.66	5.74	5.82	5.91	5.99	6.07	6.16	6.24	6.33
12	6.41	6.50	6.58	6.66	6.75	6.83	6.92	7.01	7.09	7.18
13	7.26	7.35	7.43	7.52	7.61	7.69	7.78	7.87	7.95	8.04
14	8.13	8.22	8.30	8.39	8.48	8.57	8.66	8.74	8.83	8.92
15	9.01	9.10	9.19	9.28	9.36	9.45	9.54	9.63	9.72	9.81
16	9.90	9.99	10.08	10.17	10.26	10.35	10.44	10.53	10.62	10.71
17	10.80	10.89	10.98	11.07	11.16	11.25	11.35	11.44	11.53	11.62
18	11.71	11.80	11.89	11.98	12.08	12.17	12.26	12.35	12.44	12.53
19	12.63	12.72	12.81	12.90	13.00	13.09	13.18	13.27	13.36	13.46
20	13.55	13.64	13.74	13.83	13.92	14.01	14.11	14.20	14.29	14.39
21	14.48	14.57	14.67	14.76	14.85	14.95	15.04	15.13	15.23	15.32
22	15.41	15.51	15.60	15.69	15.79	15.88	15.98	16.07	16.16	16.26
23	16.35	16.45	16.54	16.63	16.73	16.82	16.92	17.01	17.11	17.20
24	17.29	17.39	17.48	17.58	17.67	17.77	17.86	17.96	18.05	18.15
25	18.24	18.34	18.43	18.53	18.62	18.72	18.81	18.91	19.00	19.10
26	19.19	19.29	19.38	19.48	19.57	19.67	19.76	19.86	19.95	20.05
27	20.14	20.24	20.33	20.43	20.53	20.62	20.72	20.81	20.91	21.00
28	21.10	21.20	21.29	21.39	21.48	21.58	21.67	21.77	21.87	21.96
29	22.06	22.15	22.25	22.35	22.44	22.54	22.63	22.73	22.83	22.92
30	23.02	23.11	23.21	23.31	23.40	23.50	23.60	23.69	23.79	23.88
31	23.98	24.08	24.17	24.27	24.37	24.46	24.56	24.66	24.75	24.85
32	24.95	25.04	25.14	25.24	25.33	25.43	25.53	25.62	25.72	25.82
33	25.91	26.01	26.11	26.20	26.30	26.40	26.49	26.59	26.69	26.78
34	26.88	26.98	27.07	27.17	27.27	27.37	27.46	27.56	27.66	27.75
35	27.85	27.95	28.05	28.14	28.24	28.34	28.43	28.53	28.63	28.73
36	28.82	28.92	29.02	29.11	29.21	29.31	29.41	29.50	29.60	29.70
37	29.79	29.89	29.99	30.09	30.18	30.28	30.38	30.48	30.57	30.67
38	30.77	30.87	30.96	31.06	31.16	31.26	31.35	31.45	31.55	31.65
39	31.74	31.84	31.94	32.04	32.13	32.23	32.33	32.43	32.52	32.62
40	32.72	32.82	32.92	33.01	33.11	33.21	33.31	33.40	33.50	33.60

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.11. NRCS Rainfall-Runoff Table for CN = 60



Runoff for inches of rainfall—Curve no. 60

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04
2	0.06	0.08	0.10	0.12	0.15	0.17	0.20	0.23	0.26	0.30
3	0.33	0.37	0.41	0.45	0.49	0.53	0.57	0.62	0.67	0.71
4	0.76	0.81	0.86	0.91	0.97	1.02	1.07	1.13	1.19	1.24
5	1.30	1.36	1.42	1.48	1.54	1.60	1.66	1.73	1.79	1.86
6	1.92	1.99	2.05	2.12	2.19	2.25	2.32	2.39	2.46	2.53
7	2.60	2.67	2.74	2.82	2.89	2.96	3.04	3.11	3.18	3.26
8	3.33	3.41	3.48	3.56	3.63	3.71	3.79	3.87	3.94	4.02
9	4.10	4.18	4.26	4.34	4.42	4.49	4.57	4.65	4.74	4.82
10	4.90	4.98	5.06	5.14	5.22	5.31	5.39	5.47	5.55	5.64
11	5.72	5.80	5.89	5.97	6.05	6.14	6.22	6.31	6.39	6.48
12	6.56	6.65	6.73	6.82	6.90	6.99	7.08	7.16	7.25	7.34
13	7.42	7.51	7.60	7.68	7.77	7.86	7.95	8.03	8.12	8.21
14	8.30	8.38	8.47	8.56	8.65	8.74	8.83	8.92	9.01	9.09
15	9.18	9.27	9.36	9.45	9.54	9.63	9.72	9.81	9.90	9.99
16	10.08	10.17	10.26	10.35	10.44	10.53	10.62	10.71	10.81	10.90
17	10.99	11.08	11.17	11.26	11.35	11.44	11.54	11.63	11.72	11.81
18	11.90	11.99	12.09	12.18	12.27	12.36	12.45	12.55	12.64	12.73
19	12.82	12.92	13.01	13.10	13.19	13.29	13.38	13.47	13.57	13.66
20	13.75	13.85	13.94	14.03	14.12	14.22	14.31	14.40	14.50	14.59
21	14.69	14.78	14.87	14.97	15.06	15.15	15.25	15.34	15.44	15.53
22	15.62	15.72	15.81	15.91	16.00	16.09	16.19	16.28	16.38	16.47
23	16.57	16.66	16.76	16.85	16.94	17.04	17.13	17.23	17.32	17.42
24	17.51	17.61	17.70	17.80	17.89	17.99	18.08	18.18	18.27	18.37
25	18.46	18.56	18.65	18.75	18.84	18.94	19.03	19.13	19.22	19.32
26	19.42	19.51	19.61	19.70	19.80	19.89	19.99	20.08	20.18	20.28
27	20.37	20.47	20.56	20.66	20.76	20.85	20.95	21.04	21.14	21.23
28	21.33	21.43	21.52	21.62	21.71	21.81	21.91	22.00	22.10	22.20
29	22.29	22.39	22.48	22.58	22.68	22.77	22.87	22.97	23.06	23.16
30	23.26	23.35	23.45	23.54	23.64	23.74	23.83	23.93	24.03	24.12
31	24.22	24.32	24.41	24.51	24.61	24.70	24.80	24.90	24.99	25.09
32	25.19	25.28	25.38	25.48	25.57	25.67	25.77	25.87	25.96	26.06
33	26.16	26.25	26.35	26.45	26.54	26.64	26.74	26.84	26.93	27.03
34	27.13	27.22	27.32	27.42	27.52	27.61	27.71	27.81	27.90	28.00
35	28.10	28.20	28.29	28.39	28.49	28.59	28.68	28.78	28.88	28.97
36	29.07	29.17	29.27	29.36	29.46	29.56	29.66	29.75	29.85	29.95
37	30.05	30.14	30.24	30.34	30.44	30.53	30.63	30.73	30.83	30.92
38	31.02	31.12	31.22	31.32	31.41	31.51	31.61	31.71	31.80	31.90
39	32.00	32.10	32.19	32.29	32.39	32.49	32.59	32.68	32.78	32.88
40	32.98	33.08	33.17	33.27	33.37	33.47	33.56	33.66	33.76	33.86

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.12. NRCS Rainfall-Runoff Table for CN = 61



Runoff for inches of rainfall—Curve no. 61

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.06
2	0.07	0.09	0.12	0.14	0.17	0.20	0.23	0.26	0.29	0.33
3	0.37	0.40	0.44	0.49	0.53	0.57	0.62	0.67	0.71	0.76
4	0.81	0.86	0.92	0.97	1.02	1.08	1.14	1.19	1.25	1.31
5	1.37	1.43	1.49	1.55	1.62	1.68	1.74	1.81	1.87	1.94
6	2.01	2.07	2.14	2.21	2.28	2.35	2.42	2.49	2.56	2.63
7	2.70	2.78	2.85	2.92	3.00	3.07	3.14	3.22	3.29	3.37
8	3.45	3.52	3.60	3.68	3.75	3.83	3.91	3.99	4.07	4.15
9	4.23	4.31	4.38	4.47	4.55	4.63	4.71	4.79	4.87	4.95
10	5.03	5.12	5.20	5.28	5.36	5.45	5.53	5.61	5.70	5.78
11	5.87	5.95	6.04	6.12	6.20	6.29	6.38	6.46	6.55	6.63
12	6.72	6.80	6.89	6.98	7.06	7.15	7.24	7.32	7.41	7.50
13	7.59	7.67	7.76	7.85	7.94	8.03	8.11	8.20	8.29	8.38
14	8.47	8.56	8.65	8.74	8.82	8.91	9.00	9.09	9.18	9.27
15	9.36	9.45	9.54	9.63	9.72	9.81	9.90	9.99	10.08	10.18
16	10.27	10.36	10.45	10.54	10.63	10.72	10.81	10.90	11.00	11.09
17	11.18	11.27	11.36	11.45	11.55	11.64	11.73	11.82	11.91	12.01
18	12.10	12.19	12.28	12.38	12.47	12.56	12.65	12.75	12.84	12.93
19	13.03	13.12	13.21	13.30	13.40	13.49	13.58	13.68	13.77	13.86
20	13.96	14.05	14.15	14.24	14.33	14.43	14.52	14.61	14.71	14.80
21	14.90	14.99	15.08	15.18	15.27	15.37	15.46	15.55	15.65	15.74
22	15.84	15.93	16.03	16.12	16.22	16.31	16.41	16.50	16.59	16.69
23	16.78	16.88	16.97	17.07	17.16	17.26	17.35	17.45	17.54	17.64
24	17.73	17.83	17.93	18.02	18.12	18.21	18.31	18.40	18.50	18.59
25	18.69	18.78	18.88	18.97	19.07	19.17	19.26	19.36	19.45	19.55
26	19.64	19.74	19.84	19.93	20.03	20.12	20.22	20.32	20.41	20.51
27	20.60	20.70	20.80	20.89	20.99	21.08	21.18	21.28	21.37	21.47
28	21.57	21.66	21.76	21.85	21.95	22.05	22.14	22.24	22.34	22.43
29	22.53	22.63	22.72	22.82	22.92	23.01	23.11	23.20	23.30	23.40
30	23.49	23.59	23.69	23.79	23.88	23.98	24.08	24.17	24.27	24.37
31	24.46	24.56	24.66	24.75	24.85	24.95	25.04	25.14	25.24	25.34
32	25.43	25.53	25.63	25.72	25.82	25.92	26.01	26.11	26.21	26.31
33	26.40	26.50	26.60	26.70	26.79	26.89	26.99	27.08	27.18	27.28
34	27.38	27.47	27.57	27.67	27.77	27.86	27.96	28.06	28.16	28.25
35	28.35	28.45	28.54	28.64	28.74	28.84	28.93	29.03	29.13	29.23
36	29.33	29.42	29.52	29.62	29.72	29.81	29.91	30.01	30.11	30.20
37	30.30	30.40	30.50	30.59	30.69	30.79	30.89	30.99	31.08	31.18
38	31.28	31.38	31.47	31.57	31.67	31.77	31.87	31.96	32.06	32.16
39	32.26	32.36	32.45	32.55	32.65	32.75	32.85	32.94	33.04	33.14
40	33.24	33.34	33.43	33.53	33.63	33.73	33.83	33.92	34.02	34.12

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.13. NRCS Rainfall-Runoff Table for CN = 62



Runoff for inches of rainfall—Curve no. 62

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.07
2	0.09	0.11	0.13	0.16	0.19	0.22	0.25	0.29	0.32	0.36
3	0.40	0.44	0.48	0.52	0.57	0.62	0.66	0.71	0.76	0.81
4	0.86	0.92	0.97	1.03	1.08	1.14	1.20	1.26	1.32	1.38
5	1.44	1.50	1.56	1.63	1.69	1.76	1.82	1.89	1.95	2.02
6	2.09	2.16	2.23	2.30	2.37	2.44	2.51	2.58	2.65	2.73
7	2.80	2.87	2.95	3.02	3.10	3.17	3.25	3.33	3.40	3.48
8	3.56	3.63	3.71	3.79	3.87	3.95	4.03	4.11	4.19	4.27
9	4.35	4.43	4.51	4.59	4.67	4.75	4.83	4.92	5.00	5.08
10	5.17	5.25	5.33	5.42	5.50	5.58	5.67	5.75	5.84	5.92
11	6.01	6.09	6.18	6.26	6.35	6.43	6.52	6.61	6.69	6.78
12	6.87	6.95	7.04	7.13	7.22	7.30	7.39	7.48	7.57	7.65
13	7.74	7.83	7.92	8.01	8.10	8.19	8.27	8.36	8.45	8.54
14	8.63	8.72	8.81	8.90	8.99	9.08	9.17	9.26	9.35	9.44
15	9.53	9.62	9.71	9.80	9.89	9.99	10.08	10.17	10.26	10.35
16	10.44	10.53	10.62	10.72	10.81	10.90	10.99	11.08	11.18	11.27
17	11.36	11.45	11.54	11.64	11.73	11.82	11.91	12.01	12.10	12.19
18	12.28	12.38	12.47	12.56	12.66	12.75	12.84	12.94	13.03	13.12
19	13.22	13.31	13.40	13.50	13.59	13.68	13.78	13.87	13.97	14.06
20	14.15	14.25	14.34	14.43	14.53	14.62	14.72	14.81	14.91	15.00
21	15.09	15.19	15.28	15.38	15.47	15.57	15.66	15.76	15.85	15.95
22	16.04	16.14	16.23	16.33	16.42	16.52	16.61	16.71	16.80	16.90
23	16.99	17.09	17.18	17.28	17.37	17.47	17.56	17.66	17.75	17.85
24	17.94	18.04	18.14	18.23	18.33	18.42	18.52	18.61	18.71	18.80
25	18.90	19.00	19.09	19.19	19.28	19.38	19.48	19.57	19.67	19.76
26	19.86	19.96	20.05	20.15	20.24	20.34	20.44	20.53	20.63	20.73
27	20.82	20.92	21.01	21.11	21.21	21.30	21.40	21.50	21.59	21.69
28	21.79	21.88	21.98	22.08	22.17	22.27	22.37	22.46	22.56	22.66
29	22.75	22.85	22.95	23.04	23.14	23.24	23.33	23.43	23.53	23.62
30	23.72	23.82	23.91	24.01	24.11	24.21	24.30	24.40	24.50	24.59
31	24.69	24.79	24.88	24.98	25.08	25.18	25.27	25.37	25.47	25.57
32	25.66	25.76	25.86	25.95	26.05	26.15	26.25	26.34	26.44	26.54
33	26.64	26.73	26.83	26.93	27.03	27.12	27.22	27.32	27.41	27.51
34	27.61	27.71	27.80	27.90	28.00	28.10	28.20	28.29	28.39	28.49
35	28.59	28.68	28.78	28.88	28.98	29.07	29.17	29.27	29.37	29.46
36	29.56	29.66	29.76	29.86	29.95	30.05	30.15	30.25	30.35	30.44
37	30.54	30.64	30.74	30.83	30.93	31.03	31.13	31.23	31.32	31.42
38	31.52	31.62	31.72	31.81	31.91	32.01	32.11	32.21	32.30	32.40
39	32.50	32.60	32.70	32.79	32.89	32.99	33.09	33.19	33.28	33.38
40	33.48	33.58	33.68	33.78	33.87	33.97	34.07	34.17	34.27	34.36

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.14. NRCS Rainfall-Runoff Table for CN = 63

Curve
63

Runoff for inches of rainfall—Curve no. 63

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.06	0.08
2	0.10	0.13	0.15	0.18	0.21	0.24	0.28	0.31	0.35	0.39
3	0.43	0.48	0.52	0.57	0.61	0.66	0.71	0.76	0.81	0.86
4	0.92	0.97	1.03	1.09	1.14	1.20	1.26	1.32	1.38	1.45
5	1.51	1.57	1.64	1.70	1.77	1.84	1.90	1.97	2.04	2.11
6	2.18	2.25	2.32	2.39	2.46	2.53	2.61	2.68	2.75	2.83
7	2.90	2.98	3.05	3.13	3.20	3.28	3.36	3.44	3.51	3.59
8	3.67	3.75	3.83	3.91	3.99	4.07	4.15	4.23	4.31	4.39
9	4.47	4.55	4.64	4.72	4.80	4.88	4.97	5.05	5.13	5.22
10	5.30	5.38	5.47	5.55	5.64	5.72	5.81	5.89	5.98	6.07
11	6.15	6.24	6.32	6.41	6.50	6.58	6.67	6.76	6.84	6.93
12	7.02	7.11	7.20	7.28	7.37	7.46	7.55	7.64	7.73	7.81
13	7.90	7.99	8.08	8.17	8.26	8.35	8.44	8.53	8.62	8.71
14	8.80	8.89	8.98	9.07	9.16	9.25	9.34	9.43	9.52	9.61
15	9.71	9.80	9.89	9.98	10.07	10.16	10.25	10.35	10.44	10.53
16	10.62	10.71	10.80	10.90	10.99	11.08	11.17	11.27	11.36	11.45
17	11.54	11.64	11.73	11.82	11.92	12.01	12.10	12.19	12.29	12.38
18	12.47	12.57	12.66	12.75	12.85	12.94	13.04	13.13	13.22	13.32
19	13.41	13.50	13.60	13.69	13.79	13.88	13.97	14.07	14.16	14.26
20	14.35	14.45	14.54	14.63	14.73	14.82	14.92	15.01	15.11	15.20
21	15.30	15.39	15.49	15.58	15.68	15.77	15.87	15.96	16.06	16.15
22	16.25	16.34	16.44	16.53	16.63	16.72	16.82	16.91	17.01	17.10
23	17.20	17.30	17.39	17.49	17.58	17.68	17.77	17.87	17.97	18.06
24	18.16	18.25	18.35	18.44	18.54	18.64	18.73	18.83	18.92	19.02
25	19.12	19.21	19.31	19.40	19.50	19.60	19.69	19.79	19.89	19.98
26	20.08	20.17	20.27	20.37	20.46	20.56	20.66	20.75	20.85	20.95
27	21.04	21.14	21.24	21.33	21.43	21.53	21.62	21.72	21.82	21.91
28	22.01	22.11	22.20	22.30	22.40	22.49	22.59	22.69	22.78	22.88
29	22.98	23.08	23.17	23.27	23.37	23.46	23.56	23.66	23.75	23.85
30	23.95	24.05	24.14	24.24	24.34	24.44	24.53	24.63	24.73	24.82
31	24.92	25.02	25.12	25.21	25.31	25.41	25.51	25.60	25.70	25.80
32	25.89	25.99	26.09	26.19	26.28	26.38	26.48	26.58	26.67	26.77
33	26.87	26.97	27.07	27.16	27.26	27.36	27.46	27.55	27.65	27.75
34	27.85	27.94	28.04	28.14	28.24	28.34	28.43	28.53	28.63	28.73
35	28.82	28.92	29.02	29.12	29.22	29.31	29.41	29.51	29.61	29.70
36	29.80	29.90	30.00	30.10	30.19	30.29	30.39	30.49	30.59	30.68
37	30.78	30.88	30.98	31.08	31.17	31.27	31.37	31.47	31.57	31.66
38	31.76	31.86	31.96	32.06	32.16	32.25	32.35	32.45	32.55	32.65
39	32.74	32.84	32.94	33.04	33.14	33.24	33.33	33.43	33.53	33.63
40	33.73	33.83	33.92	34.02	34.12	34.22	34.32	34.42	34.51	34.61

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.15. NRCS Rainfall-Runoff Table for CN = 64



Runoff for inches of rainfall—Curve no. 64

Inches	-----Tenths-----									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.01	0.01	0.02	0.04	0.05	0.07	0.09
2	0.12	0.14	0.17	0.20	0.24	0.27	0.31	0.35	0.39	0.43
3	0.47	0.51	0.56	0.61	0.66	0.71	0.76	0.81	0.86	0.92
4	0.97	1.03	1.09	1.15	1.21	1.27	1.33	1.39	1.45	1.52
5	1.58	1.65	1.71	1.78	1.85	1.92	1.98	2.05	2.12	2.19
6	2.27	2.34	2.41	2.48	2.55	2.63	2.70	2.78	2.85	2.93
7	3.00	3.08	3.16	3.23	3.31	3.39	3.47	3.55	3.62	3.70
8	3.78	3.86	3.94	4.02	4.11	4.19	4.27	4.35	4.43	4.51
9	4.60	4.68	4.76	4.85	4.93	5.01	5.10	5.18	5.27	5.35
10	5.43	5.52	5.61	5.69	5.78	5.86	5.95	6.03	6.12	6.21
11	6.29	6.38	6.47	6.56	6.64	6.73	6.82	6.91	6.99	7.08
12	7.17	7.26	7.35	7.44	7.53	7.61	7.70	7.79	7.88	7.97
13	8.06	8.15	8.24	8.33	8.42	8.51	8.60	8.69	8.78	8.87
14	8.96	9.05	9.15	9.24	9.33	9.42	9.51	9.60	9.69	9.78
15	9.88	9.97	10.06	10.15	10.24	10.34	10.43	10.52	10.61	10.70
16	10.80	10.89	10.98	11.07	11.17	11.26	11.35	11.45	11.54	11.63
17	11.73	11.82	11.91	12.01	12.10	12.19	12.29	12.38	12.47	12.57
18	12.66	12.75	12.85	12.94	13.04	13.13	13.22	13.32	13.41	13.51
19	13.60	13.69	13.79	13.88	13.98	14.07	14.17	14.26	14.36	14.45
20	14.55	14.64	14.73	14.83	14.92	15.02	15.11	15.21	15.30	15.40
21	15.49	15.59	15.69	15.78	15.88	15.97	16.07	16.16	16.26	16.35
22	16.45	16.54	16.64	16.73	16.83	16.93	17.02	17.12	17.21	17.31
23	17.40	17.50	17.60	17.69	17.79	17.88	17.98	18.08	18.17	18.27
24	18.36	18.46	18.56	18.65	18.75	18.85	18.94	19.04	19.13	19.23
25	19.33	19.42	19.52	19.62	19.71	19.81	19.91	20.00	20.10	20.20
26	20.29	20.39	20.48	20.58	20.68	20.77	20.87	20.97	21.07	21.16
27	21.26	21.36	21.45	21.55	21.65	21.74	21.84	21.94	22.03	22.13
28	22.23	22.32	22.42	22.52	22.62	22.71	22.81	22.91	23.00	23.10
29	23.20	23.30	23.39	23.49	23.59	23.69	23.78	23.88	23.98	24.07
30	24.17	24.27	24.37	24.46	24.56	24.66	24.76	24.85	24.95	25.05
31	25.15	25.24	25.34	25.44	25.54	25.63	25.73	25.83	25.93	26.02
32	26.12	26.22	26.32	26.41	26.51	26.61	26.71	26.81	26.90	27.00
33	27.10	27.20	27.29	27.39	27.49	27.59	27.69	27.78	27.88	27.98
34	28.08	28.17	28.27	28.37	28.47	28.57	28.66	28.76	28.86	28.96
35	29.06	29.15	29.25	29.35	29.45	29.55	29.64	29.74	29.84	29.94
36	30.04	30.13	30.23	30.33	30.43	30.53	30.62	30.72	30.82	30.92
37	31.02	31.12	31.21	31.31	31.41	31.51	31.61	31.70	31.80	31.90
38	32.00	32.10	32.20	32.29	32.39	32.49	32.59	32.69	32.79	32.88
39	32.98	33.08	33.18	33.28	33.38	33.47	33.57	33.67	33.77	33.87
40	33.97	34.06	34.16	34.26	34.36	34.46	34.56	34.65	34.75	34.85

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.16. NRCS Rainfall-Runoff Table for CN = 65



Runoff for inches of rainfall—Curve no. 65

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.09	0.11
2	0.14	0.16	0.19	0.23	0.26	0.30	0.34	0.38	0.42	0.46
3	0.51	0.55	0.60	0.65	0.70	0.75	0.81	0.86	0.92	0.97
4	1.03	1.09	1.15	1.21	1.27	1.33	1.39	1.46	1.52	1.59
5	1.65	1.72	1.79	1.86	1.93	2.00	2.07	2.14	2.21	2.28
6	2.35	2.43	2.50	2.57	2.65	2.72	2.80	2.87	2.95	3.03
7	3.10	3.18	3.26	3.34	3.42	3.50	3.58	3.66	3.74	3.82
8	3.90	3.98	4.06	4.14	4.22	4.30	4.39	4.47	4.55	4.64
9	4.72	4.80	4.89	4.97	5.06	5.14	5.23	5.31	5.40	5.48
10	5.57	5.65	5.74	5.83	5.91	6.00	6.09	6.17	6.26	6.35
11	6.44	6.52	6.61	6.70	6.79	6.88	6.96	7.05	7.14	7.23
12	7.32	7.41	7.50	7.59	7.68	7.77	7.86	7.95	8.04	8.13
13	8.22	8.31	8.40	8.49	8.58	8.67	8.76	8.85	8.94	9.03
14	9.13	9.22	9.31	9.40	9.49	9.58	9.68	9.77	9.86	9.95
15	10.04	10.14	10.23	10.32	10.41	10.51	10.60	10.69	10.78	10.88
16	10.97	11.06	11.16	11.25	11.34	11.44	11.53	11.62	11.72	11.81
17	11.90	12.00	12.09	12.18	12.28	12.37	12.47	12.56	12.65	12.75
18	12.84	12.94	13.03	13.12	13.22	13.31	13.41	13.50	13.60	13.69
19	13.79	13.88	13.98	14.07	14.17	14.26	14.35	14.45	14.54	14.64
20	14.73	14.83	14.93	15.02	15.12	15.21	15.31	15.40	15.50	15.59
21	15.69	15.78	15.88	15.97	16.07	16.17	16.26	16.36	16.45	16.55
22	16.64	16.74	16.84	16.93	17.03	17.12	17.22	17.32	17.41	17.51
23	17.60	17.70	17.80	17.89	17.99	18.09	18.18	18.28	18.37	18.47
24	18.57	18.66	18.76	18.86	18.95	19.05	19.15	19.24	19.34	19.44
25	19.53	19.63	19.73	19.82	19.92	20.02	20.11	20.21	20.31	20.40
26	20.50	20.60	20.69	20.79	20.89	20.98	21.08	21.18	21.27	21.37
27	21.47	21.57	21.66	21.76	21.86	21.95	22.05	22.15	22.25	22.34
28	22.44	22.54	22.63	22.73	22.83	22.93	23.02	23.12	23.22	23.32
29	23.41	23.51	23.61	23.71	23.80	23.90	24.00	24.10	24.19	24.29
30	24.39	24.49	24.58	24.68	24.78	24.88	24.97	25.07	25.17	25.27
31	25.36	25.46	25.56	25.66	25.75	25.85	25.95	26.05	26.15	26.24
32	26.34	26.44	26.54	26.63	26.73	26.83	26.93	27.03	27.12	27.22
33	27.32	27.42	27.52	27.61	27.71	27.81	27.91	28.01	28.10	28.20
34	28.30	28.40	28.50	28.59	28.69	28.79	28.89	28.99	29.08	29.18
35	29.28	29.38	29.48	29.57	29.67	29.77	29.87	29.97	30.07	30.16
36	30.26	30.36	30.46	30.56	30.66	30.75	30.85	30.95	31.05	31.15
37	31.24	31.34	31.44	31.54	31.64	31.74	31.83	31.93	32.03	32.13
38	32.23	32.33	32.42	32.52	32.62	32.72	32.82	32.92	33.02	33.11
39	33.21	33.31	33.41	33.51	33.61	33.70	33.80	33.90	34.00	34.10
40	34.20	34.30	34.39	34.49	34.59	34.69	34.79	34.89	34.99	35.08

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.17. NRCS Rainfall-Runoff Table for CN = 66



Runoff for inches of rainfall—Curve no. 66

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.01	0.01	0.02	0.04	0.06	0.08	0.10	0.13
2	0.15	0.18	0.22	0.25	0.29	0.33	0.37	0.41	0.45	0.50
3	0.55	0.59	0.64	0.69	0.75	0.80	0.86	0.91	0.97	1.03
4	1.09	1.15	1.21	1.27	1.33	1.40	1.46	1.53	1.59	1.66
5	1.73	1.80	1.87	1.94	2.01	2.08	2.15	2.22	2.29	2.37
6	2.44	2.52	2.59	2.67	2.74	2.82	2.89	2.97	3.05	3.13
7	3.21	3.28	3.36	3.44	3.52	3.60	3.68	3.76	3.85	3.93
8	4.01	4.09	4.17	4.26	4.34	4.42	4.51	4.59	4.67	4.76
9	4.84	4.93	5.01	5.10	5.18	5.27	5.35	5.44	5.53	5.61
10	5.70	5.79	5.87	5.96	6.05	6.13	6.22	6.31	6.40	6.49
11	6.57	6.66	6.75	6.84	6.93	7.02	7.11	7.20	7.29	7.38
12	7.47	7.56	7.65	7.74	7.83	7.92	8.01	8.10	8.19	8.28
13	8.37	8.46	8.55	8.64	8.73	8.83	8.92	9.01	9.10	9.19
14	9.28	9.38	9.47	9.56	9.65	9.74	9.84	9.93	10.02	10.11
15	10.21	10.30	10.39	10.49	10.58	10.67	10.76	10.86	10.95	11.04
16	11.14	11.23	11.33	11.42	11.51	11.61	11.70	11.79	11.89	11.98
17	12.08	12.17	12.26	12.36	12.45	12.55	12.64	12.74	12.83	12.92
18	13.02	13.11	13.21	13.30	13.40	13.49	13.59	13.68	13.78	13.87
19	13.97	14.06	14.16	14.25	14.35	14.44	14.54	14.63	14.73	14.82
20	14.92	15.02	15.11	15.21	15.30	15.40	15.49	15.59	15.68	15.78
21	15.88	15.97	16.07	16.16	16.26	16.36	16.45	16.55	16.64	16.74
22	16.84	16.93	17.03	17.12	17.22	17.32	17.41	17.51	17.61	17.70
23	17.80	17.89	17.99	18.09	18.18	18.28	18.38	18.47	18.57	18.67
24	18.76	18.86	18.96	19.05	19.15	19.25	19.34	19.44	19.54	19.63
25	19.73	19.83	19.92	20.02	20.12	20.22	20.31	20.41	20.51	20.60
26	20.70	20.80	20.89	20.99	21.09	21.19	21.28	21.38	21.48	21.58
27	21.67	21.77	21.87	21.96	22.06	22.16	22.26	22.35	22.45	22.55
28	22.65	22.74	22.84	22.94	23.04	23.13	23.23	23.33	23.43	23.52
29	23.62	23.72	23.82	23.91	24.01	24.11	24.21	24.30	24.40	24.50
30	24.60	24.70	24.79	24.89	24.99	25.09	25.18	25.28	25.38	25.48
31	25.58	25.67	25.77	25.87	25.97	26.06	26.16	26.26	26.36	26.46
32	26.55	26.65	26.75	26.85	26.95	27.04	27.14	27.24	27.34	27.44
33	27.53	27.63	27.73	27.83	27.93	28.03	28.12	28.22	28.32	28.42
34	28.52	28.61	28.71	28.81	28.91	29.01	29.10	29.20	29.30	29.40
35	29.50	29.60	29.69	29.79	29.89	29.99	30.09	30.19	30.28	30.38
36	30.48	30.58	30.68	30.78	30.87	30.97	31.07	31.17	31.27	31.37
37	31.47	31.56	31.66	31.76	31.86	31.96	32.06	32.15	32.25	32.35
38	32.45	32.55	32.65	32.75	32.84	32.94	33.04	33.14	33.24	33.34
39	33.44	33.53	33.63	33.73	33.83	33.93	34.03	34.13	34.22	34.32
40	34.42	34.52	34.62	34.72	34.82	34.91	35.01	35.11	35.21	35.31

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.18. NRCS Rainfall-Runoff Table for CN = 67



Runoff for inches of rainfall—Curve no. 67

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.12	0.14
2	0.17	0.21	0.24	0.28	0.32	0.36	0.40	0.44	0.49	0.54
3	0.59	0.64	0.69	0.74	0.80	0.85	0.91	0.97	1.03	1.09
4	1.15	1.21	1.27	1.34	1.40	1.47	1.53	1.60	1.67	1.74
5	1.80	1.87	1.95	2.02	2.09	2.16	2.23	2.31	2.38	2.46
6	2.53	2.61	2.68	2.76	2.84	2.92	2.99	3.07	3.15	3.23
7	3.31	3.39	3.47	3.55	3.63	3.71	3.79	3.88	3.96	4.04
8	4.12	4.21	4.29	4.37	4.46	4.54	4.63	4.71	4.80	4.88
9	4.97	5.05	5.14	5.22	5.31	5.40	5.48	5.57	5.66	5.75
10	5.83	5.92	6.01	6.10	6.18	6.27	6.36	6.45	6.54	6.63
11	6.72	6.81	6.90	6.98	7.07	7.16	7.25	7.34	7.43	7.52
12	7.61	7.71	7.80	7.89	7.98	8.07	8.16	8.25	8.34	8.43
13	8.53	8.62	8.71	8.80	8.89	8.98	9.08	9.17	9.26	9.35
14	9.45	9.54	9.63	9.72	9.82	9.91	10.00	10.09	10.19	10.28
15	10.37	10.47	10.56	10.65	10.75	10.84	10.94	11.03	11.12	11.22
16	11.31	11.40	11.50	11.59	11.69	11.78	11.87	11.97	12.06	12.16
17	12.25	12.35	12.44	12.54	12.63	12.73	12.82	12.91	13.01	13.10
18	13.20	13.29	13.39	13.48	13.58	13.67	13.77	13.87	13.96	14.06
19	14.15	14.25	14.34	14.44	14.53	14.63	14.72	14.82	14.92	15.01
20	15.11	15.20	15.30	15.39	15.49	15.59	15.68	15.78	15.87	15.97
21	16.07	16.16	16.26	16.36	16.45	16.55	16.64	16.74	16.84	16.93
22	17.03	17.13	17.22	17.32	17.42	17.51	17.61	17.70	17.80	17.90
23	17.99	18.09	18.19	18.28	18.38	18.48	18.58	18.67	18.77	18.87
24	18.96	19.06	19.16	19.25	19.35	19.45	19.54	19.64	19.74	19.84
25	19.93	20.03	20.13	20.22	20.32	20.42	20.52	20.61	20.71	20.81
26	20.90	21.00	21.10	21.20	21.29	21.39	21.49	21.59	21.68	21.78
27	21.88	21.98	22.07	22.17	22.27	22.37	22.46	22.56	22.66	22.76
28	22.85	22.95	23.05	23.15	23.24	23.34	23.44	23.54	23.64	23.73
29	23.83	23.93	24.03	24.12	24.22	24.32	24.42	24.52	24.61	24.71
30	24.81	24.91	25.01	25.10	25.20	25.30	25.40	25.49	25.59	25.69
31	25.79	25.89	25.98	26.08	26.18	26.28	26.38	26.48	26.57	26.67
32	26.77	26.87	26.97	27.06	27.16	27.26	27.36	27.46	27.55	27.65
33	27.75	27.85	27.95	28.05	28.14	28.24	28.34	28.44	28.54	28.64
34	28.73	28.83	28.93	29.03	29.13	29.23	29.32	29.42	29.52	29.62
35	29.72	29.82	29.91	30.01	30.11	30.21	30.31	30.41	30.51	30.60
36	30.70	30.80	30.90	31.00	31.10	31.19	31.29	31.39	31.49	31.59
37	31.69	31.79	31.88	31.98	32.08	32.18	32.28	32.38	32.48	32.57
38	32.67	32.77	32.87	32.97	33.07	33.17	33.27	33.36	33.46	33.56
39	33.66	33.76	33.86	33.96	34.05	34.15	34.25	34.35	34.45	34.55
40	34.65	34.75	34.84	34.94	35.04	35.14	35.24	35.34	35.44	35.54

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.19. NRCS Rainfall-Runoff Table for CN = 68



Runoff for inches of rainfall—Curve no. 68

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.01	0.01	0.03	0.04	0.06	0.08	0.11	0.13	0.16
2	0.20	0.23	0.27	0.31	0.35	0.39	0.43	0.48	0.53	0.58
3	0.63	0.68	0.73	0.79	0.85	0.90	0.96	1.02	1.08	1.14
4	1.21	1.27	1.34	1.40	1.47	1.53	1.60	1.67	1.74	1.81
5	1.88	1.95	2.03	2.10	2.17	2.25	2.32	2.40	2.47	2.55
6	2.62	2.70	2.78	2.86	2.93	3.01	3.09	3.17	3.25	3.33
7	3.41	3.49	3.58	3.66	3.74	3.82	3.90	3.99	4.07	4.15
8	4.24	4.32	4.41	4.49	4.58	4.66	4.75	4.83	4.92	5.00
9	5.09	5.18	5.26	5.35	5.44	5.53	5.61	5.70	5.79	5.88
10	5.97	6.05	6.14	6.23	6.32	6.41	6.50	6.59	6.68	6.77
11	6.86	6.95	7.04	7.13	7.22	7.31	7.40	7.49	7.58	7.67
12	7.76	7.85	7.94	8.04	8.13	8.22	8.31	8.40	8.49	8.59
13	8.68	8.77	8.86	8.95	9.05	9.14	9.23	9.33	9.42	9.51
14	9.60	9.70	9.79	9.88	9.98	10.07	10.16	10.26	10.35	10.44
15	10.54	10.63	10.73	10.82	10.91	11.01	11.10	11.20	11.29	11.38
16	11.48	11.57	11.67	11.76	11.86	11.95	12.04	12.14	12.23	12.33
17	12.42	12.52	12.61	12.71	12.80	12.90	12.99	13.09	13.18	13.28
18	13.38	13.47	13.57	13.66	13.76	13.85	13.95	14.04	14.14	14.23
19	14.33	14.43	14.52	14.62	14.71	14.81	14.91	15.00	15.10	15.19
20	15.29	15.39	15.48	15.58	15.67	15.77	15.87	15.96	16.06	16.16
21	16.25	16.35	16.45	16.54	16.64	16.73	16.83	16.93	17.02	17.12
22	17.22	17.31	17.41	17.51	17.60	17.70	17.80	17.89	17.99	18.09
23	18.19	18.28	18.38	18.48	18.57	18.67	18.77	18.86	18.96	19.06
24	19.16	19.25	19.35	19.45	19.54	19.64	19.74	19.84	19.93	20.03
25	20.13	20.23	20.32	20.42	20.52	20.61	20.71	20.81	20.91	21.00
26	21.10	21.20	21.30	21.39	21.49	21.59	21.69	21.79	21.88	21.98
27	22.08	22.18	22.27	22.37	22.47	22.57	22.66	22.76	22.86	22.96
28	23.06	23.15	23.25	23.35	23.45	23.54	23.64	23.74	23.84	23.94
29	24.03	24.13	24.23	24.33	24.43	24.52	24.62	24.72	24.82	24.92
30	25.01	25.11	25.21	25.31	25.41	25.50	25.60	25.70	25.80	25.90
31	26.00	26.09	26.19	26.29	26.39	26.49	26.58	26.68	26.78	26.88
32	26.98	27.08	27.17	27.27	27.37	27.47	27.57	27.67	27.76	27.86
33	27.96	28.06	28.16	28.26	28.35	28.45	28.55	28.65	28.75	28.85
34	28.95	29.04	29.14	29.24	29.34	29.44	29.54	29.63	29.73	29.83
35	29.93	30.03	30.13	30.23	30.32	30.42	30.52	30.62	30.72	30.82
36	30.92	31.01	31.11	31.21	31.31	31.41	31.51	31.61	31.70	31.80
37	31.90	32.00	32.10	32.20	32.30	32.40	32.49	32.59	32.69	32.79
38	32.89	32.99	33.09	33.19	33.28	33.38	33.48	33.58	33.68	33.78
39	33.88	33.98	34.07	34.17	34.27	34.37	34.47	34.57	34.67	34.77
40	34.86	34.96	35.06	35.16	35.26	35.36	35.46	35.56	35.66	35.75

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.20. NRCS Rainfall-Runoff Table for CN = 69

Curve 69											
Runoff for inches of rainfall—Curve no. 69											
Inches	Tenths										
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	
0											
1	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.12	0.15	0.18	
2	0.22	0.25	0.29	0.33	0.38	0.42	0.47	0.52	0.57	0.62	
3	0.67	0.72	0.78	0.84	0.90	0.95	1.02	1.08	1.14	1.20	
4	1.27	1.33	1.40	1.47	1.53	1.60	1.67	1.74	1.81	1.89	
5	1.96	2.03	2.11	2.18	2.25	2.33	2.41	2.48	2.56	2.64	
6	2.71	2.79	2.87	2.95	3.03	3.11	3.19	3.27	3.35	3.43	
7	3.52	3.60	3.68	3.76	3.85	3.93	4.01	4.10	4.18	4.27	
8	4.35	4.44	4.52	4.61	4.69	4.78	4.87	4.95	5.04	5.13	
9	5.21	5.30	5.39	5.48	5.56	5.65	5.74	5.83	5.92	6.01	
10	6.10	6.18	6.27	6.36	6.45	6.54	6.63	6.72	6.81	6.90	
11	6.99	7.08	7.17	7.27	7.36	7.45	7.54	7.63	7.72	7.81	
12	7.90	8.00	8.09	8.18	8.27	8.36	8.46	8.55	8.64	8.73	
13	8.83	8.92	9.01	9.11	9.20	9.29	9.38	9.48	9.57	9.66	
14	9.76	9.85	9.95	10.04	10.13	10.23	10.32	10.41	10.51	10.60	
15	10.70	10.79	10.88	10.98	11.07	11.17	11.26	11.36	11.45	11.55	
16	11.64	11.74	11.83	11.93	12.02	12.12	12.21	12.31	12.40	12.50	
17	12.59	12.69	12.78	12.88	12.97	13.07	13.16	13.26	13.35	13.45	
18	13.55	13.64	13.74	13.83	13.93	14.02	14.12	14.22	14.31	14.41	
19	14.50	14.60	14.70	14.79	14.89	14.99	15.08	15.18	15.27	15.37	
20	15.47	15.56	15.66	15.76	15.85	15.95	16.05	16.14	16.24	16.34	
21	16.43	16.53	16.63	16.72	16.82	16.92	17.01	17.11	17.21	17.30	
22	17.40	17.50	17.59	17.69	17.79	17.88	17.98	18.08	18.18	18.27	
23	18.37	18.47	18.56	18.66	18.76	18.86	18.95	19.05	19.15	19.25	
24	19.34	19.44	19.54	19.63	19.73	19.83	19.93	20.02	20.12	20.22	
25	20.32	20.41	20.51	20.61	20.71	20.80	20.90	21.00	21.10	21.20	
26	21.29	21.39	21.49	21.59	21.68	21.78	21.88	21.98	22.08	22.17	
27	22.27	22.37	22.47	22.56	22.66	22.76	22.86	22.96	23.05	23.15	
28	23.25	23.35	23.45	23.54	23.64	23.74	23.84	23.94	24.03	24.13	
29	24.23	24.33	24.43	24.52	24.62	24.72	24.82	24.92	25.02	25.11	
30	25.21	25.31	25.41	25.51	25.61	25.70	25.80	25.90	26.00	26.10	
31	26.19	26.29	26.39	26.49	26.59	26.69	26.78	26.88	26.98	27.08	
32	27.18	27.28	27.38	27.47	27.57	27.67	27.77	27.87	27.97	28.06	
33	28.16	28.26	28.36	28.46	28.56	28.66	28.75	28.85	28.95	29.05	
34	29.15	29.25	29.35	29.44	29.54	29.64	29.74	29.84	29.94	30.04	
35	30.13	30.23	30.33	30.43	30.53	30.63	30.73	30.83	30.92	31.02	
36	31.12	31.22	31.32	31.42	31.52	31.61	31.71	31.81	31.91	32.01	
37	32.11	32.21	32.31	32.41	32.50	32.60	32.70	32.80	32.90	33.00	
38	33.10	33.20	33.29	33.39	33.49	33.59	33.69	33.79	33.89	33.99	
39	34.09	34.18	34.28	34.38	34.48	34.58	34.68	34.78	34.88	34.98	
40	35.07	35.17	35.27	35.37	35.47	35.57	35.67	35.77	35.87	35.97	

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.21. NRCS Rainfall-Runoff Table for CN = 70



Runoff for inches of rainfall—Curve no. 70

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0										
1	0.00	0.01	0.03	0.04	0.06	0.08	0.11	0.14	0.17	0.20
2	0.24	0.28	0.32	0.36	0.41	0.46	0.50	0.56	0.61	0.66
3	0.72	0.77	0.83	0.89	0.95	1.01	1.07	1.14	1.20	1.27
4	1.33	1.40	1.47	1.54	1.61	1.68	1.75	1.82	1.89	1.96
5	2.04	2.11	2.19	2.26	2.34	2.42	2.49	2.57	2.65	2.73
6	2.81	2.89	2.97	3.05	3.13	3.21	3.29	3.37	3.46	3.54
7	3.62	3.70	3.79	3.87	3.96	4.04	4.13	4.21	4.30	4.38
8	4.47	4.55	4.64	4.73	4.81	4.90	4.99	5.07	5.16	5.25
9	5.34	5.43	5.52	5.60	5.69	5.78	5.87	5.96	6.05	6.14
10	6.23	6.32	6.41	6.50	6.59	6.68	6.77	6.86	6.95	7.04
11	7.13	7.23	7.32	7.41	7.50	7.59	7.68	7.78	7.87	7.96
12	8.05	8.14	8.24	8.33	8.42	8.51	8.61	8.70	8.79	8.89
13	8.98	9.07	9.17	9.26	9.35	9.45	9.54	9.63	9.73	9.82
14	9.92	10.01	10.10	10.20	10.29	10.39	10.48	10.57	10.67	10.76
15	10.86	10.95	11.05	11.14	11.24	11.33	11.43	11.52	11.62	11.71
16	11.81	11.90	12.00	12.09	12.19	12.28	12.38	12.47	12.57	12.67
17	12.76	12.86	12.95	13.05	13.14	13.24	13.34	13.43	13.53	13.62
18	13.72	13.82	13.91	14.01	14.10	14.20	14.30	14.39	14.49	14.58
19	14.68	14.78	14.87	14.97	15.07	15.16	15.26	15.36	15.45	15.55
20	15.65	15.74	15.84	15.94	16.03	16.13	16.23	16.32	16.42	16.52
21	16.61	16.71	16.81	16.90	17.00	17.10	17.20	17.29	17.39	17.49
22	17.58	17.68	17.78	17.88	17.97	18.07	18.17	18.27	18.36	18.46
23	18.56	18.65	18.75	18.85	18.95	19.04	19.14	19.24	19.34	19.43
24	19.53	19.63	19.73	19.82	19.92	20.02	20.12	20.22	20.31	20.41
25	20.51	20.61	20.70	20.80	20.90	21.00	21.10	21.19	21.29	21.39
26	21.49	21.58	21.68	21.78	21.88	21.98	22.07	22.17	22.27	22.37
27	22.47	22.56	22.66	22.76	22.86	22.96	23.05	23.15	23.25	23.35
28	23.45	23.55	23.64	23.74	23.84	23.94	24.04	24.13	24.23	24.33
29	24.43	24.53	24.63	24.72	24.82	24.92	25.02	25.12	25.22	25.31
30	25.41	25.51	25.61	25.71	25.81	25.90	26.00	26.10	26.20	26.30
31	26.40	26.49	26.59	26.69	26.79	26.89	26.99	27.09	27.18	27.28
32	27.38	27.48	27.58	27.68	27.78	27.87	27.97	28.07	28.17	28.27
33	28.37	28.47	28.56	28.66	28.76	28.86	28.96	29.06	29.16	29.25
34	29.35	29.45	29.55	29.65	29.75	29.85	29.95	30.04	30.14	30.24
35	30.34	30.44	30.54	30.64	30.74	30.83	30.93	31.03	31.13	31.23
36	31.33	31.43	31.53	31.63	31.72	31.82	31.92	32.02	32.12	32.22
37	32.32	32.42	32.51	32.61	32.71	32.81	32.91	33.01	33.11	33.21
38	33.31	33.41	33.50	33.60	33.70	33.80	33.90	34.00	34.10	34.20
39	34.30	34.39	34.49	34.59	34.69	34.79	34.89	34.99	35.09	35.19
40	35.29	35.38	35.48	35.58	35.68	35.78	35.88	35.98	36.08	36.18

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.22. NRCS Rainfall-Runoff Table for CN = 71



Runoff for inches of rainfall—Curve no. 71

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0								0.00	0.00	0.00
1	0.01	0.02	0.03	0.05	0.07	0.10	0.13	0.16	0.19	0.23
2	0.27	0.31	0.35	0.40	0.44	0.49	0.54	0.60	0.65	0.70
3	0.76	0.82	0.88	0.94	1.00	1.07	1.13	1.19	1.26	1.33
4	1.40	1.46	1.53	1.60	1.68	1.75	1.82	1.89	1.97	2.04
5	2.12	2.19	2.27	2.35	2.43	2.50	2.58	2.66	2.74	2.82
6	2.90	2.98	3.06	3.14	3.23	3.31	3.39	3.47	3.56	3.64
7	3.73	3.81	3.89	3.98	4.06	4.15	4.24	4.32	4.41	4.50
8	4.58	4.67	4.76	4.84	4.93	5.02	5.11	5.20	5.28	5.37
9	5.46	5.55	5.64	5.73	5.82	5.91	6.00	6.09	6.18	6.27
10	6.36	6.45	6.54	6.63	6.72	6.81	6.90	7.00	7.09	7.18
11	7.27	7.36	7.45	7.55	7.64	7.73	7.82	7.92	8.01	8.10
12	8.19	8.29	8.38	8.47	8.57	8.66	8.75	8.85	8.94	9.03
13	9.13	9.22	9.32	9.41	9.50	9.60	9.69	9.79	9.88	9.97
14	10.07	10.16	10.26	10.35	10.45	10.54	10.64	10.73	10.83	10.92
15	11.02	11.11	11.21	11.30	11.40	11.49	11.59	11.68	11.78	11.87
16	11.97	12.06	12.16	12.25	12.35	12.45	12.54	12.64	12.73	12.83
17	12.93	13.02	13.12	13.21	13.31	13.41	13.50	13.60	13.69	13.79
18	13.89	13.98	14.08	14.18	14.27	14.37	14.47	14.56	14.66	14.76
19	14.85	14.95	15.05	15.14	15.24	15.34	15.43	15.53	15.63	15.72
20	15.82	15.92	16.01	16.11	16.21	16.30	16.40	16.50	16.60	16.69
21	16.79	16.89	16.98	17.08	17.18	17.28	17.37	17.47	17.57	17.67
22	17.76	17.86	17.96	18.06	18.15	18.25	18.35	18.45	18.54	18.64
23	18.74	18.84	18.93	19.03	19.13	19.23	19.32	19.42	19.52	19.62
24	19.71	19.81	19.91	20.01	20.11	20.20	20.30	20.40	20.50	20.60
25	20.69	20.79	20.89	20.99	21.08	21.18	21.28	21.38	21.48	21.57
26	21.67	21.77	21.87	21.97	22.07	22.16	22.26	22.36	22.46	22.56
27	22.65	22.75	22.85	22.95	23.05	23.15	23.24	23.34	23.44	23.54
28	23.64	23.73	23.83	23.93	24.03	24.13	24.23	24.32	24.42	24.52
29	24.62	24.72	24.82	24.92	25.01	25.11	25.21	25.31	25.41	25.51
30	25.60	25.70	25.80	25.90	26.00	26.10	26.20	26.29	26.39	26.49
31	26.59	26.69	26.79	26.89	26.98	27.08	27.18	27.28	27.38	27.48
32	27.58	27.67	27.77	27.87	27.97	28.07	28.17	28.27	28.37	28.46
33	28.56	28.66	28.76	28.86	28.96	29.06	29.16	29.25	29.35	29.45
34	29.55	29.65	29.75	29.85	29.95	30.04	30.14	30.24	30.34	30.44
35	30.54	30.64	30.74	30.84	30.93	31.03	31.13	31.23	31.33	31.43
36	31.53	31.63	31.73	31.82	31.92	32.02	32.12	32.22	32.32	32.42
37	32.52	32.62	32.72	32.81	32.91	33.01	33.11	33.21	33.31	33.41
38	33.51	33.61	33.71	33.80	33.90	34.00	34.10	34.20	34.30	34.40
39	34.50	34.60	34.70	34.80	34.89	34.99	35.09	35.19	35.29	35.39
40	35.49	35.59	35.69	35.79	35.89	35.98	36.08	36.18	36.28	36.38

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.23. NRCS Rainfall-Runoff Table for CN = 72



Runoff for inches of rainfall—Curve no. 72

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0									0.00	0.00
1	0.01	0.02	0.04	0.06	0.09	0.11	0.14	0.18	0.21	0.25
2	0.29	0.34	0.38	0.43	0.48	0.53	0.58	0.64	0.69	0.75
3	0.81	0.87	0.93	0.99	1.06	1.12	1.19	1.25	1.32	1.39
4	1.46	1.53	1.60	1.67	1.75	1.82	1.89	1.97	2.04	2.12
5	2.20	2.27	2.35	2.43	2.51	2.59	2.67	2.75	2.83	2.91
6	2.99	3.07	3.16	3.24	3.32	3.41	3.49	3.57	3.66	3.74
7	3.83	3.91	4.00	4.09	4.17	4.26	4.34	4.43	4.52	4.61
8	4.69	4.78	4.87	4.96	5.05	5.14	5.22	5.31	5.40	5.49
9	5.58	5.67	5.76	5.85	5.94	6.03	6.12	6.21	6.30	6.39
10	6.49	6.58	6.67	6.76	6.85	6.94	7.04	7.13	7.22	7.31
11	7.40	7.50	7.59	7.68	7.77	7.87	7.96	8.05	8.15	8.24
12	8.33	8.43	8.52	8.61	8.71	8.80	8.90	8.99	9.08	9.18
13	9.27	9.37	9.46	9.55	9.65	9.74	9.84	9.93	10.03	10.12
14	10.22	10.31	10.41	10.50	10.60	10.69	10.79	10.88	10.98	11.07
15	11.17	11.26	11.36	11.45	11.55	11.65	11.74	11.84	11.93	12.03
16	12.12	12.22	12.32	12.41	12.51	12.60	12.70	12.80	12.89	12.99
17	13.08	13.18	13.28	13.37	13.47	13.57	13.66	13.76	13.86	13.95
18	14.05	14.15	14.24	14.34	14.44	14.53	14.63	14.73	14.82	14.92
19	15.02	15.11	15.21	15.31	15.40	15.50	15.60	15.70	15.79	15.89
20	15.99	16.08	16.18	16.28	16.38	16.47	16.57	16.67	16.76	16.86
21	16.96	17.06	17.15	17.25	17.35	17.45	17.54	17.64	17.74	17.84
22	17.93	18.03	18.13	18.23	18.33	18.42	18.52	18.62	18.72	18.81
23	18.91	19.01	19.11	19.20	19.30	19.40	19.50	19.60	19.69	19.79
24	19.89	19.99	20.09	20.18	20.28	20.38	20.48	20.58	20.67	20.77
25	20.87	20.97	21.07	21.16	21.26	21.36	21.46	21.56	21.66	21.75
26	21.85	21.95	22.05	22.15	22.24	22.34	22.44	22.54	22.64	22.74
27	22.83	22.93	23.03	23.13	23.23	23.33	23.42	23.52	23.62	23.72
28	23.82	23.92	24.02	24.11	24.21	24.31	24.41	24.51	24.61	24.70
29	24.80	24.90	25.00	25.10	25.20	25.30	25.39	25.49	25.59	25.69
30	25.79	25.89	25.99	26.08	26.18	26.28	26.38	26.48	26.58	26.68
31	26.78	26.87	26.97	27.07	27.17	27.27	27.37	27.47	27.57	27.66
32	27.76	27.86	27.96	28.06	28.16	28.26	28.36	28.45	28.55	28.65
33	28.75	28.85	28.95	29.05	29.15	29.25	29.34	29.44	29.54	29.64
34	29.74	29.84	29.94	30.04	30.14	30.23	30.33	30.43	30.53	30.63
35	30.73	30.83	30.93	31.03	31.12	31.22	31.32	31.42	31.52	31.62
36	31.72	31.82	31.92	32.02	32.11	32.21	32.31	32.41	32.51	32.61
37	32.71	32.81	32.91	33.01	33.11	33.20	33.30	33.40	33.50	33.60
38	33.70	33.80	33.90	34.00	34.10	34.20	34.29	34.39	34.49	34.59
39	34.69	34.79	34.89	34.99	35.09	35.19	35.29	35.39	35.48	35.58
40	35.68	35.78	35.88	35.98	36.08	36.18	36.28	36.38	36.48	36.58

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.24. NRCS Rainfall-Runoff Table for CN = 73



Runoff for inches of rainfall—Curve no. 73

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
1	0.02	0.03	0.05	0.07	0.10	0.13	0.16	0.20	0.24	0.28
2	0.32	0.37	0.41	0.46	0.51	0.57	0.62	0.68	0.74	0.80
3	0.86	0.92	0.98	1.05	1.11	1.18	1.25	1.32	1.39	1.46
4	1.53	1.60	1.67	1.75	1.82	1.90	1.97	2.05	2.12	2.20
5	2.28	2.36	2.44	2.52	2.60	2.68	2.76	2.84	2.92	3.01
6	3.09	3.17	3.25	3.34	3.42	3.51	3.59	3.68	3.76	3.85
7	3.93	4.02	4.11	4.19	4.28	4.37	4.46	4.54	4.63	4.72
8	4.81	4.90	4.99	5.08	5.17	5.25	5.34	5.43	5.52	5.61
9	5.70	5.80	5.89	5.98	6.07	6.16	6.25	6.34	6.43	6.52
10	6.62	6.71	6.80	6.89	6.98	7.08	7.17	7.26	7.35	7.45
11	7.54	7.63	7.73	7.82	7.91	8.01	8.10	8.19	8.29	8.38
12	8.48	8.57	8.66	8.76	8.85	8.95	9.04	9.13	9.23	9.32
13	9.42	9.51	9.61	9.70	9.80	9.89	9.99	10.08	10.18	10.27
14	10.37	10.46	10.56	10.65	10.75	10.84	10.94	11.04	11.13	11.23
15	11.32	11.42	11.51	11.61	11.71	11.80	11.90	11.99	12.09	12.19
16	12.28	12.38	12.47	12.57	12.67	12.76	12.86	12.96	13.05	13.15
17	13.25	13.34	13.44	13.54	13.63	13.73	13.83	13.92	14.02	14.12
18	14.21	14.31	14.41	14.50	14.60	14.70	14.79	14.89	14.99	15.09
19	15.18	15.28	15.38	15.48	15.57	15.67	15.77	15.86	15.96	16.06
20	16.16	16.25	16.35	16.45	16.55	16.64	16.74	16.84	16.94	17.03
21	17.13	17.23	17.33	17.42	17.52	17.62	17.72	17.82	17.91	18.01
22	18.11	18.21	18.30	18.40	18.50	18.60	18.70	18.79	18.89	18.99
23	19.09	19.19	19.28	19.38	19.48	19.58	19.68	19.77	19.87	19.97
24	20.07	20.17	20.26	20.36	20.46	20.56	20.66	20.75	20.85	20.95
25	21.05	21.15	21.25	21.34	21.44	21.54	21.64	21.74	21.84	21.93
26	22.03	22.13	22.23	22.33	22.43	22.52	22.62	22.72	22.82	22.92
27	23.02	23.12	23.21	23.31	23.41	23.51	23.61	23.71	23.81	23.90
28	24.00	24.10	24.20	24.30	24.40	24.50	24.59	24.69	24.79	24.89
29	24.99	25.09	25.19	25.28	25.38	25.48	25.58	25.68	25.78	25.88
30	25.98	26.07	26.17	26.27	26.37	26.47	26.57	26.67	26.77	26.86
31	26.96	27.06	27.16	27.26	27.36	27.46	27.56	27.65	27.75	27.85
32	27.95	28.05	28.15	28.25	28.35	28.45	28.54	28.64	28.74	28.84
33	28.94	29.04	29.14	29.24	29.34	29.44	29.53	29.63	29.73	29.83
34	29.93	30.03	30.13	30.23	30.33	30.43	30.52	30.62	30.72	30.82
35	30.92	31.02	31.12	31.22	31.32	31.42	31.52	31.61	31.71	31.81
36	31.91	32.01	32.11	32.21	32.31	32.41	32.51	32.61	32.70	32.80
37	32.90	33.00	33.10	33.20	33.30	33.40	33.50	33.60	33.70	33.80
38	33.89	33.99	34.09	34.19	34.29	34.39	34.49	34.59	34.69	34.79
39	34.89	34.99	35.08	35.18	35.28	35.38	35.48	35.58	35.68	35.78
40	35.88	35.98	36.08	36.18	36.28	36.38	36.47	36.57	36.67	36.77

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.25. NRCS Rainfall-Runoff Table for CN = 74



Runoff for inches of rainfall—Curve no. 74

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
1	0.02	0.04	0.06	0.09	0.12	0.15	0.18	0.22	0.26	0.30
2	0.35	0.40	0.45	0.50	0.55	0.61	0.67	0.72	0.78	0.85
3	0.91	0.97	1.04	1.11	1.17	1.24	1.31	1.38	1.45	1.52
4	1.60	1.67	1.75	1.82	1.90	1.97	2.05	2.13	2.21	2.29
5	2.37	2.45	2.53	2.61	2.69	2.77	2.85	2.94	3.02	3.10
6	3.19	3.27	3.36	3.44	3.53	3.61	3.70	3.78	3.87	3.96
7	4.04	4.13	4.22	4.31	4.39	4.48	4.57	4.66	4.75	4.84
8	4.93	5.02	5.11	5.20	5.29	5.38	5.47	5.56	5.65	5.74
9	5.83	5.92	6.01	6.11	6.20	6.29	6.38	6.47	6.57	6.66
10	6.75	6.84	6.94	7.03	7.12	7.21	7.31	7.40	7.49	7.59
11	7.68	7.77	7.87	7.96	8.06	8.15	8.24	8.34	8.43	8.53
12	8.62	8.71	8.81	8.90	9.00	9.09	9.19	9.28	9.38	9.47
13	9.57	9.66	9.76	9.85	9.95	10.04	10.14	10.23	10.33	10.43
14	10.52	10.62	10.71	10.81	10.90	11.00	11.10	11.19	11.29	11.38
15	11.48	11.58	11.67	11.77	11.86	11.96	12.06	12.15	12.25	12.35
16	12.44	12.54	12.64	12.73	12.83	12.93	13.02	13.12	13.22	13.31
17	13.41	13.51	13.60	13.70	13.80	13.89	13.99	14.09	14.19	14.28
18	14.38	14.48	14.57	14.67	14.77	14.87	14.96	15.06	15.16	15.26
19	15.35	15.45	15.55	15.65	15.74	15.84	15.94	16.04	16.13	16.23
20	16.33	16.43	16.52	16.62	16.72	16.82	16.91	17.01	17.11	17.21
21	17.31	17.40	17.50	17.60	17.70	17.79	17.89	17.99	18.09	18.19
22	18.28	18.38	18.48	18.58	18.68	18.77	18.87	18.97	19.07	19.17
23	19.27	19.36	19.46	19.56	19.66	19.76	19.85	19.95	20.05	20.15
24	20.25	20.35	20.44	20.54	20.64	20.74	20.84	20.94	21.03	21.13
25	21.23	21.33	21.43	21.53	21.62	21.72	21.82	21.92	22.02	22.12
26	22.22	22.31	22.41	22.51	22.61	22.71	22.81	22.91	23.00	23.10
27	23.20	23.30	23.40	23.50	23.60	23.69	23.79	23.89	23.99	24.09
28	24.19	24.29	24.39	24.48	24.58	24.68	24.78	24.88	24.98	25.08
29	25.18	25.27	25.37	25.47	25.57	25.67	25.77	25.87	25.97	26.06
30	26.16	26.26	26.36	26.46	26.56	26.66	26.76	26.86	26.95	27.05
31	27.15	27.25	27.35	27.45	27.55	27.65	27.75	27.85	27.94	28.04
32	28.14	28.24	28.34	28.44	28.54	28.64	28.74	28.83	28.93	29.03
33	29.13	29.23	29.33	29.43	29.53	29.63	29.73	29.83	29.92	30.02
34	30.12	30.22	30.32	30.42	30.52	30.62	30.72	30.82	30.92	31.01
35	31.11	31.21	31.31	31.41	31.51	31.61	31.71	31.81	31.91	32.01
36	32.11	32.20	32.30	32.40	32.50	32.60	32.70	32.80	32.90	33.00
37	33.10	33.20	33.30	33.40	33.49	33.59	33.69	33.79	33.89	33.99
38	34.09	34.19	34.29	34.39	34.49	34.59	34.69	34.78	34.88	34.98
39	35.08	35.18	35.28	35.38	35.48	35.58	35.68	35.78	35.88	35.98
40	36.08	36.18	36.27	36.37	36.47	36.57	36.67	36.77	36.87	36.97

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.26. NRCS Rainfall-Runoff Table for CN = 75



Runoff for inches of rainfall—Curve no. 75

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02
1	0.03	0.05	0.07	0.10	0.13	0.17	0.20	0.24	0.29	0.33
2	0.38	0.43	0.48	0.54	0.59	0.65	0.71	0.77	0.83	0.90
3	0.96	1.03	1.10	1.16	1.23	1.30	1.37	1.45	1.52	1.59
4	1.67	1.74	1.82	1.90	1.97	2.05	2.13	2.21	2.29	2.37
5	2.45	2.53	2.61	2.70	2.78	2.86	2.95	3.03	3.11	3.20
6	3.28	3.37	3.46	3.54	3.63	3.71	3.80	3.89	3.98	4.06
7	4.15	4.24	4.33	4.42	4.51	4.59	4.68	4.77	4.86	4.95
8	5.04	5.13	5.22	5.32	5.41	5.50	5.59	5.68	5.77	5.86
9	5.95	6.05	6.14	6.23	6.32	6.42	6.51	6.60	6.69	6.79
10	6.88	6.97	7.07	7.16	7.25	7.35	7.44	7.53	7.63	7.72
11	7.82	7.91	8.00	8.10	8.19	8.29	8.38	8.48	8.57	8.67
12	8.76	8.86	8.95	9.05	9.14	9.24	9.33	9.43	9.52	9.62
13	9.71	9.81	9.90	10.00	10.09	10.19	10.29	10.38	10.48	10.57
14	10.67	10.77	10.86	10.96	11.05	11.15	11.25	11.34	11.44	11.54
15	11.63	11.73	11.82	11.92	12.02	12.11	12.21	12.31	12.40	12.50
16	12.60	12.69	12.79	12.89	12.99	13.08	13.18	13.28	13.37	13.47
17	13.57	13.67	13.76	13.86	13.96	14.05	14.15	14.25	14.35	14.44
18	14.54	14.64	14.74	14.83	14.93	15.03	15.13	15.22	15.32	15.42
19	15.52	15.61	15.71	15.81	15.91	16.00	16.10	16.20	16.30	16.40
20	16.49	16.59	16.69	16.79	16.88	16.98	17.08	17.18	17.28	17.37
21	17.47	17.57	17.67	17.77	17.86	17.96	18.06	18.16	18.26	18.36
22	18.45	18.55	18.65	18.75	18.85	18.94	19.04	19.14	19.24	19.34
23	19.44	19.53	19.63	19.73	19.83	19.93	20.03	20.12	20.22	20.32
24	20.42	20.52	20.62	20.72	20.81	20.91	21.01	21.11	21.21	21.31
25	21.40	21.50	21.60	21.70	21.80	21.90	22.00	22.09	22.19	22.29
26	22.39	22.49	22.59	22.69	22.79	22.88	22.98	23.08	23.18	23.28
27	23.38	23.48	23.58	23.67	23.77	23.87	23.97	24.07	24.17	24.27
28	24.37	24.46	24.56	24.66	24.76	24.86	24.96	25.06	25.16	25.26
29	25.35	25.45	25.55	25.65	25.75	25.85	25.95	26.05	26.15	26.24
30	26.34	26.44	26.54	26.64	26.74	26.84	26.94	27.04	27.14	27.23
31	27.33	27.43	27.53	27.63	27.73	27.83	27.93	28.03	28.13	28.22
32	28.32	28.42	28.52	28.62	28.72	28.82	28.92	29.02	29.12	29.22
33	29.31	29.41	29.51	29.61	29.71	29.81	29.91	30.01	30.11	30.21
34	30.31	30.41	30.50	30.60	30.70	30.80	30.90	31.00	31.10	31.20
35	31.30	31.40	31.50	31.60	31.70	31.79	31.89	31.99	32.09	32.19
36	32.29	32.39	32.49	32.59	32.69	32.79	32.89	32.99	33.08	33.18
37	33.28	33.38	33.48	33.58	33.68	33.78	33.88	33.98	34.08	34.18
38	34.28	34.38	34.48	34.57	34.67	34.77	34.87	34.97	35.07	35.17
39	35.27	35.37	35.47	35.57	35.67	35.77	35.87	35.97	36.07	36.16
40	36.26	36.36	36.46	36.56	36.66	36.76	36.86	36.96	37.06	37.16

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.27. NRCS Rainfall-Runoff Table for CN = 76



Runoff for inches of rainfall—Curve no. 76

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02
1	0.04	0.06	0.09	0.12	0.15	0.19	0.23	0.27	0.32	0.36
2	0.41	0.47	0.52	0.58	0.63	0.69	0.76	0.82	0.88	0.95
3	1.01	1.08	1.15	1.22	1.29	1.36	1.44	1.51	1.59	1.66
4	1.74	1.81	1.89	1.97	2.05	2.13	2.21	2.29	2.37	2.45
5	2.53	2.62	2.70	2.78	2.87	2.95	3.04	3.12	3.21	3.29
6	3.38	3.47	3.55	3.64	3.73	3.81	3.90	3.99	4.08	4.17
7	4.26	4.35	4.43	4.52	4.61	4.70	4.79	4.88	4.97	5.07
8	5.16	5.25	5.34	5.43	5.52	5.61	5.71	5.80	5.89	5.98
9	6.07	6.17	6.26	6.35	6.45	6.54	6.63	6.72	6.82	6.91
10	7.01	7.10	7.19	7.29	7.38	7.47	7.57	7.66	7.76	7.85
11	7.95	8.04	8.14	8.23	8.32	8.42	8.51	8.61	8.70	8.80
12	8.90	8.99	9.09	9.18	9.28	9.37	9.47	9.56	9.66	9.76
13	9.85	9.95	10.04	10.14	10.23	10.33	10.43	10.52	10.62	10.72
14	10.81	10.91	11.00	11.10	11.20	11.29	11.39	11.49	11.58	11.68
15	11.78	11.87	11.97	12.07	12.16	12.26	12.36	12.46	12.55	12.65
16	12.75	12.84	12.94	13.04	13.14	13.23	13.33	13.43	13.52	13.62
17	13.72	13.82	13.91	14.01	14.11	14.21	14.30	14.40	14.50	14.60
18	14.69	14.79	14.89	14.99	15.09	15.18	15.28	15.38	15.48	15.57
19	15.67	15.77	15.87	15.97	16.06	16.16	16.26	16.36	16.46	16.55
20	16.65	16.75	16.85	16.95	17.04	17.14	17.24	17.34	17.44	17.53
21	17.63	17.73	17.83	17.93	18.03	18.12	18.22	18.32	18.42	18.52
22	18.62	18.71	18.81	18.91	19.01	19.11	19.21	19.30	19.40	19.50
23	19.60	19.70	19.80	19.89	19.99	20.09	20.19	20.29	20.39	20.49
24	20.58	20.68	20.78	20.88	20.98	21.08	21.18	21.27	21.37	21.47
25	21.57	21.67	21.77	21.87	21.97	22.06	22.16	22.26	22.36	22.46
26	22.56	22.66	22.76	22.85	22.95	23.05	23.15	23.25	23.35	23.45
27	23.55	23.65	23.74	23.84	23.94	24.04	24.14	24.24	24.34	24.44
28	24.54	24.63	24.73	24.83	24.93	25.03	25.13	25.23	25.33	25.43
29	25.52	25.62	25.72	25.82	25.92	26.02	26.12	26.22	26.32	26.42
30	26.51	26.61	26.71	26.81	26.91	27.01	27.11	27.21	27.31	27.41
31	27.51	27.60	27.70	27.80	27.90	28.00	28.10	28.20	28.30	28.40
32	28.50	28.60	28.70	28.79	28.89	28.99	29.09	29.19	29.29	29.39
33	29.49	29.59	29.69	29.79	29.89	29.99	30.08	30.18	30.28	30.38
34	30.48	30.58	30.68	30.78	30.88	30.98	31.08	31.18	31.28	31.37
35	31.47	31.57	31.67	31.77	31.87	31.97	32.07	32.17	32.27	32.37
36	32.47	32.57	32.67	32.77	32.86	32.96	33.06	33.16	33.26	33.36
37	33.46	33.56	33.66	33.76	33.86	33.96	34.06	34.16	34.26	34.35
38	34.45	34.55	34.65	34.75	34.85	34.95	35.05	35.15	35.25	35.35
39	35.45	35.55	35.65	35.75	35.85	35.95	36.05	36.14	36.24	36.34
40	36.44	36.54	36.64	36.74	36.84	36.94	37.04	37.14	37.24	37.34

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.28. NRCS Rainfall-Runoff Table for CN = 77



Runoff for inches of rainfall—Curve no. 77

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03
1	0.05	0.07	0.10	0.13	0.17	0.21	0.25	0.30	0.34	0.39
2	0.45	0.50	0.56	0.62	0.68	0.74	0.80	0.87	0.93	1.00
3	1.07	1.14	1.21	1.28	1.36	1.43	1.50	1.58	1.66	1.73
4	1.81	1.89	1.97	2.05	2.13	2.21	2.29	2.37	2.46	2.54
5	2.62	2.71	2.79	2.87	2.96	3.04	3.13	3.22	3.30	3.39
6	3.48	3.56	3.65	3.74	3.83	3.92	4.01	4.10	4.18	4.27
7	4.36	4.45	4.54	4.63	4.73	4.82	4.91	5.00	5.09	5.18
8	5.27	5.36	5.46	5.55	5.64	5.73	5.83	5.92	6.01	6.10
9	6.20	6.29	6.38	6.48	6.57	6.66	6.76	6.85	6.95	7.04
10	7.13	7.23	7.32	7.42	7.51	7.61	7.70	7.79	7.89	7.98
11	8.08	8.17	8.27	8.36	8.46	8.56	8.65	8.75	8.84	8.94
12	9.03	9.13	9.22	9.32	9.42	9.51	9.61	9.70	9.80	9.90
13	9.99	10.09	10.19	10.28	10.38	10.47	10.57	10.67	10.76	10.86
14	10.96	11.05	11.15	11.25	11.34	11.44	11.54	11.64	11.73	11.83
15	11.93	12.02	12.12	12.22	12.31	12.41	12.51	12.61	12.70	12.80
16	12.90	13.00	13.09	13.19	13.29	13.39	13.48	13.58	13.68	13.78
17	13.87	13.97	14.07	14.17	14.26	14.36	14.46	14.56	14.65	14.75
18	14.85	14.95	15.05	15.14	15.24	15.34	15.44	15.54	15.63	15.73
19	15.83	15.93	16.03	16.12	16.22	16.32	16.42	16.52	16.61	16.71
20	16.81	16.91	17.01	17.11	17.20	17.30	17.40	17.50	17.60	17.70
21	17.79	17.89	17.99	18.09	18.19	18.29	18.38	18.48	18.58	18.68
22	18.78	18.88	18.98	19.07	19.17	19.27	19.37	19.47	19.57	19.67
23	19.76	19.86	19.96	20.06	20.16	20.26	20.36	20.45	20.55	20.65
24	20.75	20.85	20.95	21.05	21.15	21.24	21.34	21.44	21.54	21.64
25	21.74	21.84	21.94	22.03	22.13	22.23	22.33	22.43	22.53	22.63
26	22.73	22.83	22.92	23.02	23.12	23.22	23.32	23.42	23.52	23.62
27	23.72	23.82	23.91	24.01	24.11	24.21	24.31	24.41	24.51	24.61
28	24.71	24.81	24.90	25.00	25.10	25.20	25.30	25.40	25.50	25.60
29	25.70	25.80	25.89	25.99	26.09	26.19	26.29	26.39	26.49	26.59
30	26.69	26.79	26.89	26.99	27.08	27.18	27.28	27.38	27.48	27.58
31	27.68	27.78	27.88	27.98	28.08	28.18	28.28	28.37	28.47	28.57
32	28.67	28.77	28.87	28.97	29.07	29.17	29.27	29.37	29.47	29.57
33	29.66	29.76	29.86	29.96	30.06	30.16	30.26	30.36	30.46	30.56
34	30.66	30.76	30.86	30.96	31.05	31.15	31.25	31.35	31.45	31.55
35	31.65	31.75	31.85	31.95	32.05	32.15	32.25	32.35	32.45	32.55
36	32.64	32.74	32.84	32.94	33.04	33.14	33.24	33.34	33.44	33.54
37	33.64	33.74	33.84	33.94	34.04	34.14	34.24	34.33	34.43	34.53
38	34.63	34.73	34.83	34.93	35.03	35.13	35.23	35.33	35.43	35.53
39	35.63	35.73	35.83	35.93	36.03	36.13	36.22	36.32	36.42	36.52
40	36.62	36.72	36.82	36.92	37.02	37.12	37.22	37.32	37.42	37.52

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.29. NRCS Rainfall-Runoff Table for CN = 78



Runoff for inches of rainfall—Curve no. 78

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04
1	0.06	0.09	0.12	0.15	0.19	0.23	0.28	0.33	0.38	0.43
2	0.48	0.54	0.60	0.66	0.72	0.79	0.85	0.92	0.99	1.06
3	1.13	1.20	1.27	1.35	1.42	1.50	1.57	1.65	1.73	1.81
4	1.89	1.97	2.05	2.13	2.21	2.29	2.38	2.46	2.54	2.63
5	2.71	2.80	2.88	2.97	3.05	3.14	3.23	3.32	3.40	3.49
6	3.58	3.67	3.76	3.85	3.93	4.02	4.11	4.20	4.29	4.38
7	4.48	4.57	4.66	4.75	4.84	4.93	5.02	5.11	5.21	5.30
8	5.39	5.48	5.58	5.67	5.76	5.86	5.95	6.04	6.14	6.23
9	6.32	6.42	6.51	6.60	6.70	6.79	6.89	6.98	7.08	7.17
10	7.26	7.36	7.45	7.55	7.64	7.74	7.83	7.93	8.03	8.12
11	8.22	8.31	8.41	8.50	8.60	8.69	8.79	8.89	8.98	9.08
12	9.17	9.27	9.37	9.46	9.56	9.65	9.75	9.85	9.94	10.04
13	10.14	10.23	10.33	10.43	10.52	10.62	10.72	10.81	10.91	11.01
14	11.11	11.20	11.30	11.40	11.49	11.59	11.69	11.79	11.88	11.98
15	12.08	12.17	12.27	12.37	12.47	12.56	12.66	12.76	12.86	12.95
16	13.05	13.15	13.25	13.34	13.44	13.54	13.64	13.74	13.83	13.93
17	14.03	14.13	14.22	14.32	14.42	14.52	14.62	14.71	14.81	14.91
18	15.01	15.11	15.20	15.30	15.40	15.50	15.60	15.70	15.79	15.89
19	15.99	16.09	16.19	16.28	16.38	16.48	16.58	16.68	16.78	16.87
20	16.97	17.07	17.17	17.27	17.37	17.47	17.56	17.66	17.76	17.86
21	17.96	18.06	18.16	18.25	18.35	18.45	18.55	18.65	18.75	18.85
22	18.94	19.04	19.14	19.24	19.34	19.44	19.54	19.63	19.73	19.83
23	19.93	20.03	20.13	20.23	20.33	20.42	20.52	20.62	20.72	20.82
24	20.92	21.02	21.12	21.22	21.31	21.41	21.51	21.61	21.71	21.81
25	21.91	22.01	22.11	22.20	22.30	22.40	22.50	22.60	22.70	22.80
26	22.90	23.00	23.10	23.19	23.29	23.39	23.49	23.59	23.69	23.79
27	23.89	23.99	24.09	24.19	24.28	24.38	24.48	24.58	24.68	24.78
28	24.88	24.98	25.08	25.18	25.28	25.37	25.47	25.57	25.67	25.77
29	25.87	25.97	26.07	26.17	26.27	26.37	26.47	26.56	26.66	26.76
30	26.86	26.96	27.06	27.16	27.26	27.36	27.46	27.56	27.66	27.76
31	27.86	27.95	28.05	28.15	28.25	28.35	28.45	28.55	28.65	28.75
32	28.85	28.95	29.05	29.15	29.25	29.34	29.44	29.54	29.64	29.74
33	29.84	29.94	30.04	30.14	30.24	30.34	30.44	30.54	30.64	30.74
34	30.84	30.93	31.03	31.13	31.23	31.33	31.43	31.53	31.63	31.73
35	31.83	31.93	32.03	32.13	32.23	32.33	32.43	32.53	32.62	32.72
36	32.82	32.92	33.02	33.12	33.22	33.32	33.42	33.52	33.62	33.72
37	33.82	33.92	34.02	34.12	34.22	34.32	34.42	34.52	34.61	34.71
38	34.81	34.91	35.01	35.11	35.21	35.31	35.41	35.51	35.61	35.71
39	35.81	35.91	36.01	36.11	36.21	36.31	36.41	36.51	36.61	36.70
40	36.80	36.90	37.00	37.10	37.20	37.30	37.40	37.50	37.60	37.70

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.30. NRCS Rainfall-Runoff Table for CN = 79



Runoff for inches of rainfall—Curve no. 79

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04
1	0.07	0.10	0.13	0.17	0.21	0.26	0.31	0.36	0.41	0.46
2	0.52	0.58	0.64	0.71	0.77	0.84	0.90	0.97	1.04	1.12
3	1.19	1.26	1.34	1.41	1.49	1.57	1.64	1.72	1.80	1.88
4	1.96	2.04	2.13	2.21	2.29	2.38	2.46	2.54	2.63	2.71
5	2.80	2.89	2.97	3.06	3.15	3.24	3.32	3.41	3.50	3.59
6	3.68	3.77	3.86	3.95	4.04	4.13	4.22	4.31	4.40	4.49
7	4.58	4.67	4.77	4.86	4.95	5.04	5.14	5.23	5.32	5.41
8	5.51	5.60	5.69	5.79	5.88	5.97	6.07	6.16	6.26	6.35
9	6.44	6.54	6.63	6.73	6.82	6.92	7.01	7.11	7.20	7.30
10	7.39	7.49	7.58	7.68	7.77	7.87	7.96	8.06	8.16	8.25
11	8.35	8.44	8.54	8.63	8.73	8.83	8.92	9.02	9.12	9.21
12	9.31	9.41	9.50	9.60	9.70	9.79	9.89	9.99	10.08	10.18
13	10.28	10.37	10.47	10.57	10.66	10.76	10.86	10.96	11.05	11.15
14	11.25	11.34	11.44	11.54	11.64	11.73	11.83	11.93	12.03	12.12
15	12.22	12.32	12.42	12.51	12.61	12.71	12.81	12.90	13.00	13.10
16	13.20	13.30	13.39	13.49	13.59	13.69	13.79	13.88	13.98	14.08
17	14.18	14.28	14.37	14.47	14.57	14.67	14.77	14.86	14.96	15.06
18	15.16	15.26	15.36	15.45	15.55	15.65	15.75	15.85	15.95	16.04
19	16.14	16.24	16.34	16.44	16.54	16.64	16.73	16.83	16.93	17.03
20	17.13	17.23	17.32	17.42	17.52	17.62	17.72	17.82	17.92	18.02
21	18.11	18.21	18.31	18.41	18.51	18.61	18.71	18.80	18.90	19.00
22	19.10	19.20	19.30	19.40	19.50	19.60	19.69	19.79	19.89	19.99
23	20.09	20.19	20.29	20.39	20.49	20.58	20.68	20.78	20.88	20.98
24	21.08	21.18	21.28	21.38	21.47	21.57	21.67	21.77	21.87	21.97
25	22.07	22.17	22.27	22.37	22.47	22.56	22.66	22.76	22.86	22.96
26	23.06	23.16	23.26	23.36	23.46	23.56	23.65	23.75	23.85	23.95
27	24.05	24.15	24.25	24.35	24.45	24.55	24.65	24.75	24.84	24.94
28	25.04	25.14	25.24	25.34	25.44	25.54	25.64	25.74	25.84	25.94
29	26.04	26.13	26.23	26.33	26.43	26.53	26.63	26.73	26.83	26.93
30	27.03	27.13	27.23	27.33	27.43	27.52	27.62	27.72	27.82	27.92
31	28.02	28.12	28.22	28.32	28.42	28.52	28.62	28.72	28.82	28.92
32	29.02	29.11	29.21	29.31	29.41	29.51	29.61	29.71	29.81	29.91
33	30.01	30.11	30.21	30.31	30.41	30.51	30.61	30.71	30.80	30.90
34	31.00	31.10	31.20	31.30	31.40	31.50	31.60	31.70	31.80	31.90
35	32.00	32.10	32.20	32.30	32.40	32.50	32.60	32.70	32.79	32.89
36	32.99	33.09	33.19	33.29	33.39	33.49	33.59	33.69	33.79	33.89
37	33.99	34.09	34.19	34.29	34.39	34.49	34.59	34.69	34.79	34.88
38	34.98	35.08	35.18	35.28	35.38	35.48	35.58	35.68	35.78	35.88
39	35.98	36.08	36.18	36.28	36.38	36.48	36.58	36.68	36.78	36.88
40	36.98	37.08	37.18	37.27	37.37	37.47	37.57	37.67	37.77	37.87

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.31. NRCS Rainfall-Runoff Table for CN = 80



Runoff for inches of rainfall—Curve no. 80

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06
1	0.08	0.12	0.15	0.19	0.24	0.29	0.34	0.39	0.44	0.50
2	0.56	0.62	0.69	0.75	0.82	0.89	0.96	1.03	1.10	1.18
3	1.25	1.33	1.40	1.48	1.56	1.64	1.72	1.80	1.88	1.96
4	2.04	2.12	2.21	2.29	2.38	2.46	2.55	2.63	2.72	2.81
5	2.89	2.98	3.07	3.16	3.24	3.33	3.42	3.51	3.60	3.69
6	3.78	3.87	3.96	4.05	4.14	4.24	4.33	4.42	4.51	4.60
7	4.69	4.79	4.88	4.97	5.06	5.16	5.25	5.34	5.44	5.53
8	5.63	5.72	5.81	5.91	6.00	6.10	6.19	6.28	6.38	6.47
9	6.57	6.66	6.76	6.85	6.95	7.04	7.14	7.23	7.33	7.43
10	7.52	7.62	7.71	7.81	7.90	8.00	8.10	8.19	8.29	8.38
11	8.48	8.58	8.67	8.77	8.87	8.96	9.06	9.16	9.25	9.35
12	9.45	9.54	9.64	9.74	9.83	9.93	10.03	10.13	10.22	10.32
13	10.42	10.51	10.61	10.71	10.81	10.90	11.00	11.10	11.20	11.29
14	11.39	11.49	11.59	11.68	11.78	11.88	11.98	12.07	12.17	12.27
15	12.37	12.47	12.56	12.66	12.76	12.86	12.96	13.05	13.15	13.25
16	13.35	13.45	13.54	13.64	13.74	13.84	13.94	14.03	14.13	14.23
17	14.33	14.43	14.53	14.62	14.72	14.82	14.92	15.02	15.12	15.21
18	15.31	15.41	15.51	15.61	15.71	15.80	15.90	16.00	16.10	16.20
19	16.30	16.40	16.49	16.59	16.69	16.79	16.89	16.99	17.09	17.19
20	17.28	17.38	17.48	17.58	17.68	17.78	17.88	17.98	18.07	18.17
21	18.27	18.37	18.47	18.57	18.67	18.77	18.86	18.96	19.06	19.16
22	19.26	19.36	19.46	19.56	19.66	19.76	19.85	19.95	20.05	20.15
23	20.25	20.35	20.45	20.55	20.65	20.75	20.84	20.94	21.04	21.14
24	21.24	21.34	21.44	21.54	21.64	21.74	21.83	21.93	22.03	22.13
25	22.23	22.33	22.43	22.53	22.63	22.73	22.83	22.93	23.02	23.12
26	23.22	23.32	23.42	23.52	23.62	23.72	23.82	23.92	24.02	24.12
27	24.22	24.31	24.41	24.51	24.61	24.71	24.81	24.91	25.01	25.11
28	25.21	25.31	25.41	25.51	25.61	25.70	25.80	25.90	26.00	26.10
29	26.20	26.30	26.40	26.50	26.60	26.70	26.80	26.90	27.00	27.10
30	27.20	27.29	27.39	27.49	27.59	27.69	27.79	27.89	27.99	28.09
31	28.19	28.29	28.39	28.49	28.59	28.69	28.79	28.89	28.98	29.08
32	29.18	29.28	29.38	29.48	29.58	29.68	29.78	29.88	29.98	30.08
33	30.18	30.28	30.38	30.48	30.58	30.68	30.78	30.88	30.97	31.07
34	31.17	31.27	31.37	31.47	31.57	31.67	31.77	31.87	31.97	32.07
35	32.17	32.27	32.37	32.47	32.57	32.67	32.77	32.87	32.97	33.06
36	33.16	33.26	33.36	33.46	33.56	33.66	33.76	33.86	33.96	34.06
37	34.16	34.26	34.36	34.46	34.56	34.66	34.76	34.86	34.96	35.06
38	35.16	35.26	35.36	35.46	35.55	35.65	35.75	35.85	35.95	36.05
39	36.15	36.25	36.35	36.45	36.55	36.65	36.75	36.85	36.95	37.05
40	37.15	37.25	37.35	37.45	37.55	37.65	37.75	37.85	37.95	38.05

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.32. NRCS Rainfall-Runoff Table for CN = 81



Runoff for inches of rainfall—Curve no. 81

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07
1	0.10	0.13	0.17	0.22	0.27	0.32	0.37	0.42	0.48	0.54
2	0.61	0.67	0.74	0.80	0.87	0.94	1.02	1.09	1.16	1.24
3	1.32	1.39	1.47	1.55	1.63	1.71	1.79	1.87	1.96	2.04
4	2.12	2.21	2.29	2.38	2.47	2.55	2.64	2.73	2.81	2.90
5	2.99	3.08	3.17	3.26	3.34	3.43	3.52	3.62	3.71	3.80
6	3.89	3.98	4.07	4.16	4.25	4.35	4.44	4.53	4.62	4.72
7	4.81	4.90	5.00	5.09	5.18	5.28	5.37	5.46	5.56	5.65
8	5.75	5.84	5.94	6.03	6.13	6.22	6.31	6.41	6.51	6.60
9	6.70	6.79	6.89	6.98	7.08	7.17	7.27	7.37	7.46	7.56
10	7.65	7.75	7.85	7.94	8.04	8.13	8.23	8.33	8.42	8.52
11	8.62	8.71	8.81	8.91	9.00	9.10	9.20	9.30	9.39	9.49
12	9.59	9.68	9.78	9.88	9.98	10.07	10.17	10.27	10.37	10.46
13	10.56	10.66	10.76	10.85	10.95	11.05	11.15	11.24	11.34	11.44
14	11.54	11.63	11.73	11.83	11.93	12.03	12.12	12.22	12.32	12.42
15	12.52	12.61	12.71	12.81	12.91	13.01	13.11	13.20	13.30	13.40
16	13.50	13.60	13.69	13.79	13.89	13.99	14.09	14.19	14.29	14.38
17	14.48	14.58	14.68	14.78	14.88	14.97	15.07	15.17	15.27	15.37
18	15.47	15.57	15.66	15.76	15.86	15.96	16.06	16.16	16.26	16.36
19	16.45	16.55	16.65	16.75	16.85	16.95	17.05	17.15	17.24	17.34
20	17.44	17.54	17.64	17.74	17.84	17.94	18.04	18.13	18.23	18.33
21	18.43	18.53	18.63	18.73	18.83	18.93	19.03	19.12	19.22	19.32
22	19.42	19.52	19.62	19.72	19.82	19.92	20.02	20.11	20.21	20.31
23	20.41	20.51	20.61	20.71	20.81	20.91	21.01	21.11	21.21	21.30
24	21.40	21.50	21.60	21.70	21.80	21.90	22.00	22.10	22.20	22.30
25	22.40	22.50	22.59	22.69	22.79	22.89	22.99	23.09	23.19	23.29
26	23.39	23.49	23.59	23.69	23.79	23.88	23.98	24.08	24.18	24.28
27	24.38	24.48	24.58	24.68	24.78	24.88	24.98	25.08	25.18	25.28
28	25.38	25.47	25.57	25.67	25.77	25.87	25.97	26.07	26.17	26.27
29	26.37	26.47	26.57	26.67	26.77	26.87	26.97	27.07	27.16	27.26
30	27.36	27.46	27.56	27.66	27.76	27.86	27.96	28.06	28.16	28.26
31	28.36	28.46	28.56	28.66	28.76	28.86	28.96	29.06	29.15	29.25
32	29.35	29.45	29.55	29.65	29.75	29.85	29.95	30.05	30.15	30.25
33	30.35	30.45	30.55	30.65	30.75	30.85	30.95	31.05	31.15	31.25
34	31.34	31.44	31.54	31.64	31.74	31.84	31.94	32.04	32.14	32.24
35	32.34	32.44	32.54	32.64	32.74	32.84	32.94	33.04	33.14	33.24
36	33.34	33.44	33.54	33.64	33.74	33.83	33.93	34.03	34.13	34.23
37	34.33	34.43	34.53	34.63	34.73	34.83	34.93	35.03	35.13	35.23
38	35.33	35.43	35.53	35.63	35.73	35.83	35.93	36.03	36.13	36.23
39	36.33	36.43	36.53	36.62	36.72	36.82	36.92	37.02	37.12	37.22
40	37.32	37.42	37.52	37.62	37.72	37.82	37.92	38.02	38.12	38.22

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.33. NRCS Rainfall-Runoff Table for CN = 82



Runoff for inches of rainfall—Curve no. 82

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08
1	0.11	0.15	0.20	0.24	0.29	0.34	0.40	0.46	0.52	0.58
2	0.65	0.71	0.78	0.85	0.92	1.00	1.07	1.15	1.22	1.30
3	1.38	1.46	1.54	1.62	1.70	1.78	1.86	1.95	2.03	2.12
4	2.20	2.29	2.37	2.46	2.55	2.63	2.72	2.81	2.90	2.99
5	3.08	3.17	3.26	3.35	3.44	3.53	3.62	3.71	3.80	3.89
6	3.98	4.08	4.17	4.26	4.35	4.45	4.54	4.63	4.73	4.82
7	4.91	5.01	5.10	5.19	5.29	5.38	5.48	5.57	5.67	5.76
8	5.86	5.95	6.05	6.14	6.24	6.33	6.43	6.52	6.62	6.71
9	6.81	6.91	7.00	7.10	7.19	7.29	7.39	7.48	7.58	7.68
10	7.77	7.87	7.96	8.06	8.16	8.25	8.35	8.45	8.55	8.64
11	8.74	8.84	8.93	9.03	9.13	9.23	9.32	9.42	9.52	9.61
12	9.71	9.81	9.91	10.00	10.10	10.20	10.30	10.39	10.49	10.59
13	10.69	10.79	10.88	10.98	11.08	11.18	11.28	11.37	11.47	11.57
14	11.67	11.77	11.86	11.96	12.06	12.16	12.26	12.35	12.45	12.55
15	12.65	12.75	12.85	12.94	13.04	13.14	13.24	13.34	13.44	13.53
16	13.63	13.73	13.83	13.93	14.03	14.13	14.22	14.32	14.42	14.52
17	14.62	14.72	14.82	14.91	15.01	15.11	15.21	15.31	15.41	15.51
18	15.60	15.70	15.80	15.90	16.00	16.10	16.20	16.30	16.40	16.49
19	16.59	16.69	16.79	16.89	16.99	17.09	17.19	17.29	17.38	17.48
20	17.58	17.68	17.78	17.88	17.98	18.08	18.18	18.28	18.37	18.47
21	18.57	18.67	18.77	18.87	18.97	19.07	19.17	19.27	19.37	19.46
22	19.56	19.66	19.76	19.86	19.96	20.06	20.16	20.26	20.36	20.46
23	20.56	20.65	20.75	20.85	20.95	21.05	21.15	21.25	21.35	21.45
24	21.55	21.65	21.75	21.85	21.95	22.04	22.14	22.24	22.34	22.44
25	22.54	22.64	22.74	22.84	22.94	23.04	23.14	23.24	23.34	23.43
26	23.53	23.63	23.73	23.83	23.93	24.03	24.13	24.23	24.33	24.43
27	24.53	24.63	24.73	24.83	24.93	25.03	25.12	25.22	25.32	25.42
28	25.52	25.62	25.72	25.82	25.92	26.02	26.12	26.22	26.32	26.42
29	26.52	26.62	26.72	26.82	26.92	27.01	27.11	27.21	27.31	27.41
30	27.51	27.61	27.71	27.81	27.91	28.01	28.11	28.21	28.31	28.41
31	28.51	28.61	28.71	28.81	28.91	29.01	29.11	29.20	29.30	29.40
32	29.50	29.60	29.70	29.80	29.90	30.00	30.10	30.20	30.30	30.40
33	30.50	30.60	30.70	30.80	30.90	31.00	31.10	31.20	31.30	31.40
34	31.50	31.59	31.69	31.79	31.89	31.99	32.09	32.19	32.29	32.39
35	32.49	32.59	32.69	32.79	32.89	32.99	33.09	33.19	33.29	33.39
36	33.49	33.59	33.69	33.79	33.89	33.99	34.09	34.19	34.29	34.39
37	34.48	34.58	34.68	34.78	34.88	34.98	35.08	35.18	35.28	35.38
38	35.48	35.58	35.68	35.78	35.88	35.98	36.08	36.18	36.28	36.38
39	36.48	36.58	36.68	36.78	36.88	36.98	37.08	37.18	37.28	37.38
40	37.48	37.58	37.68	37.78	37.87	37.97	38.07	38.17	38.27	38.37

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.34. NRCS Rainfall-Runoff Table for CN = 83



Runoff for inches of rainfall—Curve no. 83

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.09
1	0.13	0.17	0.22	0.27	0.32	0.38	0.44	0.50	0.56	0.63
2	0.69	0.76	0.83	0.91	0.98	1.06	1.13	1.21	1.29	1.37
3	1.45	1.53	1.61	1.69	1.77	1.86	1.94	2.03	2.11	2.20
4	2.29	2.37	2.46	2.55	2.64	2.72	2.81	2.90	2.99	3.08
5	3.17	3.26	3.35	3.45	3.54	3.63	3.72	3.81	3.90	4.00
6	4.09	4.18	4.28	4.37	4.46	4.56	4.65	4.74	4.84	4.93
7	5.03	5.12	5.22	5.31	5.40	5.50	5.59	5.69	5.79	5.88
8	5.98	6.07	6.17	6.26	6.36	6.45	6.55	6.65	6.74	6.84
9	6.93	7.03	7.13	7.22	7.32	7.42	7.51	7.61	7.71	7.80
10	7.90	8.00	8.09	8.19	8.29	8.39	8.48	8.58	8.68	8.78
11	8.87	8.97	9.07	9.16	9.26	9.36	9.46	9.56	9.65	9.75
12	9.85	9.95	10.04	10.14	10.24	10.34	10.44	10.53	10.63	10.73
13	10.83	10.93	11.02	11.12	11.22	11.32	11.42	11.51	11.61	11.71
14	11.81	11.91	12.01	12.10	12.20	12.30	12.40	12.50	12.60	12.69
15	12.79	12.89	12.99	13.09	13.19	13.29	13.38	13.48	13.58	13.68
16	13.78	13.88	13.98	14.07	14.17	14.27	14.37	14.47	14.57	14.67
17	14.77	14.86	14.96	15.06	15.16	15.26	15.36	15.46	15.56	15.66
18	15.75	15.85	15.95	16.05	16.15	16.25	16.35	16.45	16.55	16.64
19	16.74	16.84	16.94	17.04	17.14	17.24	17.34	17.44	17.54	17.64
20	17.73	17.83	17.93	18.03	18.13	18.23	18.33	18.43	18.53	18.63
21	18.73	18.82	18.92	19.02	19.12	19.22	19.32	19.42	19.52	19.62
22	19.72	19.82	19.92	20.02	20.11	20.21	20.31	20.41	20.51	20.61
23	20.71	20.81	20.91	21.01	21.11	21.21	21.31	21.41	21.51	21.60
24	21.70	21.80	21.90	22.00	22.10	22.20	22.30	22.40	22.50	22.60
25	22.70	22.80	22.90	23.00	23.10	23.19	23.29	23.39	23.49	23.59
26	23.69	23.79	23.89	23.99	24.09	24.19	24.29	24.39	24.49	24.59
27	24.69	24.79	24.89	24.99	25.08	25.18	25.28	25.38	25.48	25.58
28	25.68	25.78	25.88	25.98	26.08	26.18	26.28	26.38	26.48	26.58
29	26.68	26.78	26.88	26.98	27.08	27.17	27.27	27.37	27.47	27.57
30	27.67	27.77	27.87	27.97	28.07	28.17	28.27	28.37	28.47	28.57
31	28.67	28.77	28.87	28.97	29.07	29.17	29.27	29.37	29.47	29.57
32	29.66	29.76	29.86	29.96	30.06	30.16	30.26	30.36	30.46	30.56
33	30.66	30.76	30.86	30.96	31.06	31.16	31.26	31.36	31.46	31.56
34	31.66	31.76	31.86	31.96	32.06	32.16	32.26	32.36	32.46	32.56
35	32.65	32.75	32.85	32.95	33.05	33.15	33.25	33.35	33.45	33.55
36	33.65	33.75	33.85	33.95	34.05	34.15	34.25	34.35	34.45	34.55
37	34.65	34.75	34.85	34.95	35.05	35.15	35.25	35.35	35.45	35.55
38	35.65	35.75	35.85	35.95	36.04	36.14	36.24	36.34	36.44	36.54
39	36.64	36.74	36.84	36.94	37.04	37.14	37.24	37.34	37.44	37.54
40	37.64	37.74	37.84	37.94	38.04	38.14	38.24	38.34	38.44	38.54

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.35. NRCS Rainfall-Runoff Table for CN = 84



Runoff for inches of rainfall—Curve no. 84

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.11
1	0.15	0.20	0.25	0.30	0.36	0.42	0.48	0.54	0.61	0.68
2	0.75	0.82	0.89	0.97	1.04	1.12	1.20	1.28	1.36	1.44
3	1.52	1.60	1.68	1.77	1.85	1.94	2.03	2.11	2.20	2.29
4	2.37	2.46	2.55	2.64	2.73	2.82	2.91	3.00	3.09	3.18
5	3.27	3.37	3.46	3.55	3.64	3.73	3.83	3.92	4.01	4.11
6	4.20	4.29	4.39	4.48	4.58	4.67	4.76	4.86	4.95	5.05
7	5.14	5.24	5.33	5.43	5.52	5.62	5.72	5.81	5.91	6.00
8	6.10	6.20	6.29	6.39	6.48	6.58	6.68	6.77	6.87	6.97
9	7.06	7.16	7.26	7.35	7.45	7.55	7.64	7.74	7.84	7.94
10	8.03	8.13	8.23	8.33	8.42	8.52	8.62	8.72	8.81	8.91
11	9.01	9.11	9.20	9.30	9.40	9.50	9.60	9.69	9.79	9.89
12	9.99	10.09	10.18	10.28	10.38	10.48	10.58	10.67	10.77	10.87
13	10.97	11.07	11.17	11.26	11.36	11.46	11.56	11.66	11.76	11.85
14	11.95	12.05	12.15	12.25	12.35	12.45	12.54	12.64	12.74	12.84
15	12.94	13.04	13.14	13.23	13.33	13.43	13.53	13.63	13.73	13.83
16	13.93	14.02	14.12	14.22	14.32	14.42	14.52	14.62	14.72	14.82
17	14.91	15.01	15.11	15.21	15.31	15.41	15.51	15.61	15.71	15.81
18	15.90	16.00	16.10	16.20	16.30	16.40	16.50	16.60	16.70	16.80
19	16.90	17.00	17.09	17.19	17.29	17.39	17.49	17.59	17.69	17.79
20	17.89	17.99	18.09	18.19	18.28	18.38	18.48	18.58	18.68	18.78
21	18.88	18.98	19.08	19.18	19.28	19.38	19.48	19.58	19.67	19.77
22	19.87	19.97	20.07	20.17	20.27	20.37	20.47	20.57	20.67	20.77
23	20.87	20.97	21.07	21.17	21.26	21.36	21.46	21.56	21.66	21.76
24	21.86	21.96	22.06	22.16	22.26	22.36	22.46	22.56	22.66	22.76
25	22.86	22.96	23.06	23.15	23.25	23.35	23.45	23.55	23.65	23.75
26	23.85	23.95	24.05	24.15	24.25	24.35	24.45	24.55	24.65	24.75
27	24.85	24.95	25.05	25.15	25.24	25.34	25.44	25.54	25.64	25.74
28	25.84	25.94	26.04	26.14	26.24	26.34	26.44	26.54	26.64	26.74
29	26.84	26.94	27.04	27.14	27.24	27.34	27.44	27.54	27.64	27.73
30	27.83	27.93	28.03	28.13	28.23	28.33	28.43	28.53	28.63	28.73
31	28.83	28.93	29.03	29.13	29.23	29.33	29.43	29.53	29.63	29.73
32	29.83	29.93	30.03	30.13	30.23	30.33	30.43	30.53	30.63	30.72
33	30.82	30.92	31.02	31.12	31.22	31.32	31.42	31.52	31.62	31.72
34	31.82	31.92	32.02	32.12	32.22	32.32	32.42	32.52	32.62	32.72
35	32.82	32.92	33.02	33.12	33.22	33.32	33.42	33.52	33.62	33.72
36	33.82	33.92	34.02	34.12	34.22	34.31	34.41	34.51	34.61	34.71
37	34.81	34.91	35.01	35.11	35.21	35.31	35.41	35.51	35.61	35.71
38	35.81	35.91	36.01	36.11	36.21	36.31	36.41	36.51	36.61	36.71
39	36.81	36.91	37.01	37.11	37.21	37.31	37.41	37.51	37.61	37.71
40	37.81	37.91	38.01	38.11	38.21	38.31	38.41	38.51	38.61	38.71

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.36. NRCS Rainfall-Runoff Table for CN = 85

Curve 85											
Runoff for inches of rainfall—Curve no. 85											
Inches	-----Tenths-----										
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	
0	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.13	
1	0.17	0.22	0.28	0.33	0.39	0.45	0.52	0.58	0.65	0.72	
2	0.80	0.87	0.95	1.02	1.10	1.18	1.26	1.34	1.42	1.51	
3	1.59	1.68	1.76	1.85	1.93	2.02	2.11	2.19	2.28	2.37	
4	2.46	2.55	2.64	2.73	2.82	2.91	3.00	3.10	3.19	3.28	
5	3.37	3.46	3.56	3.65	3.74	3.84	3.93	4.02	4.12	4.21	
6	4.31	4.40	4.50	4.59	4.68	4.78	4.87	4.97	5.07	5.16	
7	5.26	5.35	5.45	5.54	5.64	5.74	5.83	5.93	6.02	6.12	
8	6.22	6.31	6.41	6.51	6.60	6.70	6.80	6.89	6.99	7.09	
9	7.19	7.28	7.38	7.48	7.57	7.67	7.77	7.87	7.96	8.06	
10	8.16	8.26	8.35	8.45	8.55	8.65	8.75	8.84	8.94	9.04	
11	9.14	9.24	9.33	9.43	9.53	9.63	9.73	9.82	9.92	10.02	
12	10.12	10.22	10.32	10.41	10.51	10.61	10.71	10.81	10.91	11.00	
13	11.10	11.20	11.30	11.40	11.50	11.60	11.69	11.79	11.89	11.99	
14	12.09	12.19	12.29	12.39	12.48	12.58	12.68	12.78	12.88	12.98	
15	13.08	13.18	13.27	13.37	13.47	13.57	13.67	13.77	13.87	13.97	
16	14.07	14.16	14.26	14.36	14.46	14.56	14.66	14.76	14.86	14.96	
17	15.06	15.16	15.25	15.35	15.45	15.55	15.65	15.75	15.85	15.95	
18	16.05	16.15	16.25	16.35	16.44	16.54	16.64	16.74	16.84	16.94	
19	17.04	17.14	17.24	17.34	17.44	17.54	17.64	17.73	17.83	17.93	
20	18.03	18.13	18.23	18.33	18.43	18.53	18.63	18.73	18.83	18.93	
21	19.03	19.13	19.23	19.32	19.42	19.52	19.62	19.72	19.82	19.92	
22	20.02	20.12	20.22	20.32	20.42	20.52	20.62	20.72	20.82	20.92	
23	21.01	21.11	21.21	21.31	21.41	21.51	21.61	21.71	21.81	21.91	
24	22.01	22.11	22.21	22.31	22.41	22.51	22.61	22.71	22.81	22.91	
25	23.01	23.10	23.20	23.30	23.40	23.50	23.60	23.70	23.80	23.90	
26	24.00	24.10	24.20	24.30	24.40	24.50	24.60	24.70	24.80	24.90	
27	25.00	25.10	25.20	25.30	25.40	25.50	25.59	25.69	25.79	25.89	
28	25.99	26.09	26.19	26.29	26.39	26.49	26.59	26.69	26.79	26.89	
29	26.99	27.09	27.19	27.29	27.39	27.49	27.59	27.69	27.79	27.89	
30	27.99	28.09	28.19	28.29	28.39	28.49	28.58	28.68	28.78	28.88	
31	28.98	29.08	29.18	29.28	29.38	29.48	29.58	29.68	29.78	29.88	
32	29.98	30.08	30.18	30.28	30.38	30.48	30.58	30.68	30.78	30.88	
33	30.98	31.08	31.18	31.28	31.38	31.48	31.58	31.68	31.78	31.88	
34	31.98	32.08	32.17	32.27	32.37	32.47	32.57	32.67	32.77	32.87	
35	32.97	33.07	33.17	33.27	33.37	33.47	33.57	33.67	33.77	33.87	
36	33.97	34.07	34.17	34.27	34.37	34.47	34.57	34.67	34.77	34.87	
37	34.97	35.07	35.17	35.27	35.37	35.47	35.57	35.67	35.77	35.87	
38	35.97	36.07	36.17	36.27	36.37	36.47	36.57	36.67	36.77	36.86	
39	36.96	37.06	37.16	37.26	37.36	37.46	37.56	37.66	37.76	37.86	
40	37.96	38.06	38.16	38.26	38.36	38.46	38.56	38.66	38.76	38.86	

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.37. NRCS Rainfall-Runoff Table for CN = 86

Curve
86

Runoff for inches of rainfall—Curve no. 86

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.11	0.15
1	0.20	0.25	0.31	0.36	0.43	0.49	0.56	0.63	0.70	0.77
2	0.85	0.92	1.00	1.08	1.16	1.24	1.32	1.41	1.49	1.58
3	1.66	1.75	1.83	1.92	2.01	2.10	2.19	2.27	2.36	2.45
4	2.54	2.64	2.73	2.82	2.91	3.00	3.09	3.19	3.28	3.37
5	3.47	3.56	3.65	3.75	3.84	3.93	4.03	4.12	4.22	4.31
6	4.41	4.50	4.60	4.69	4.79	4.88	4.98	5.08	5.17	5.27
7	5.36	5.46	5.56	5.65	5.75	5.85	5.94	6.04	6.14	6.23
8	6.33	6.43	6.52	6.62	6.72	6.82	6.91	7.01	7.11	7.20
9	7.30	7.40	7.50	7.59	7.69	7.79	7.89	7.99	8.08	8.18
10	8.28	8.38	8.47	8.57	8.67	8.77	8.87	8.97	9.06	9.16
11	9.26	9.36	9.46	9.55	9.65	9.75	9.85	9.95	10.05	10.15
12	10.24	10.34	10.44	10.54	10.64	10.74	10.84	10.93	11.03	11.13
13	11.23	11.33	11.43	11.53	11.62	11.72	11.82	11.92	12.02	12.12
14	12.22	12.32	12.42	12.51	12.61	12.71	12.81	12.91	13.01	13.11
15	13.21	13.31	13.40	13.50	13.60	13.70	13.80	13.90	14.00	14.10
16	14.20	14.30	14.40	14.49	14.59	14.69	14.79	14.89	14.99	15.09
17	15.19	15.29	15.39	15.49	15.59	15.69	15.78	15.88	15.98	16.08
18	16.18	16.28	16.38	16.48	16.58	16.68	16.78	16.88	16.98	17.08
19	17.17	17.27	17.37	17.47	17.57	17.67	17.77	17.87	17.97	18.07
20	18.17	18.27	18.37	18.47	18.57	18.67	18.77	18.86	18.96	19.06
21	19.16	19.26	19.36	19.46	19.56	19.66	19.76	19.86	19.96	20.06
22	20.16	20.26	20.36	20.46	20.56	20.66	20.76	20.85	20.95	21.05
23	21.15	21.25	21.35	21.45	21.55	21.65	21.75	21.85	21.95	22.05
24	22.15	22.25	22.35	22.45	22.55	22.65	22.75	22.85	22.95	23.05
25	23.15	23.24	23.34	23.44	23.54	23.64	23.74	23.84	23.94	24.04
26	24.14	24.24	24.34	24.44	24.54	24.64	24.74	24.84	24.94	25.04
27	25.14	25.24	25.34	25.44	25.54	25.64	25.74	25.84	25.94	26.03
28	26.13	26.23	26.33	26.43	26.53	26.63	26.73	26.83	26.93	27.03
29	27.13	27.23	27.33	27.43	27.53	27.63	27.73	27.83	27.93	28.03
30	28.13	28.23	28.33	28.43	28.53	28.63	28.73	28.83	28.93	29.03
31	29.13	29.23	29.33	29.43	29.53	29.62	29.72	29.82	29.92	30.02
32	30.12	30.22	30.32	30.42	30.52	30.62	30.72	30.82	30.92	31.02
33	31.12	31.22	31.32	31.42	31.52	31.62	31.72	31.82	31.92	32.02
34	32.12	32.22	32.32	32.42	32.52	32.62	32.72	32.82	32.92	33.02
35	33.12	33.22	33.32	33.42	33.52	33.62	33.72	33.82	33.92	34.02
36	34.12	34.22	34.31	34.41	34.51	34.61	34.71	34.81	34.91	35.01
37	35.11	35.21	35.31	35.41	35.51	35.61	35.71	35.81	35.91	36.01
38	36.11	36.21	36.31	36.41	36.51	36.61	36.71	36.81	36.91	37.01
39	37.11	37.21	37.31	37.41	37.51	37.61	37.71	37.81	37.91	38.01
40	38.11	38.21	38.31	38.41	38.51	38.61	38.71	38.81	38.91	39.01

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.38. NRCS Rainfall-Runoff Table for CN = 87



Runoff for inches of rainfall—Curve no. 87

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.13	0.17
1	0.22	0.28	0.34	0.40	0.47	0.54	0.61	0.68	0.75	0.83
2	0.91	0.99	1.07	1.15	1.23	1.31	1.40	1.48	1.57	1.65
3	1.74	1.83	1.92	2.01	2.10	2.19	2.28	2.37	2.46	2.55
4	2.64	2.73	2.82	2.92	3.01	3.10	3.20	3.29	3.38	3.48
5	3.57	3.66	3.76	3.85	3.95	4.04	4.14	4.23	4.33	4.43
6	4.52	4.62	4.71	4.81	4.90	5.00	5.10	5.19	5.29	5.39
7	5.48	5.58	5.68	5.77	5.87	5.97	6.06	6.16	6.26	6.36
8	6.45	6.55	6.65	6.75	6.84	6.94	7.04	7.14	7.23	7.33
9	7.43	7.53	7.63	7.72	7.82	7.92	8.02	8.12	8.21	8.31
10	8.41	8.51	8.61	8.71	8.80	8.90	9.00	9.10	9.20	9.30
11	9.39	9.49	9.59	9.69	9.79	9.89	9.99	10.08	10.18	10.28
12	10.38	10.48	10.58	10.68	10.78	10.87	10.97	11.07	11.17	11.27
13	11.37	11.47	11.57	11.67	11.76	11.86	11.96	12.06	12.16	12.26
14	12.36	12.46	12.56	12.66	12.75	12.85	12.95	13.05	13.15	13.25
15	13.35	13.45	13.55	13.65	13.75	13.85	13.94	14.04	14.14	14.24
16	14.34	14.44	14.54	14.64	14.74	14.84	14.94	15.04	15.14	15.23
17	15.33	15.43	15.53	15.63	15.73	15.83	15.93	16.03	16.13	16.23
18	16.33	16.43	16.53	16.63	16.73	16.82	16.92	17.02	17.12	17.22
19	17.32	17.42	17.52	17.62	17.72	17.82	17.92	18.02	18.12	18.22
20	18.32	18.42	18.52	18.62	18.71	18.81	18.91	19.01	19.11	19.21
21	19.31	19.41	19.51	19.61	19.71	19.81	19.91	20.01	20.11	20.21
22	20.31	20.41	20.51	20.61	20.71	20.81	20.91	21.00	21.10	21.20
23	21.30	21.40	21.50	21.60	21.70	21.80	21.90	22.00	22.10	22.20
24	22.30	22.40	22.50	22.60	22.70	22.80	22.90	23.00	23.10	23.20
25	23.30	23.40	23.50	23.60	23.70	23.80	23.89	23.99	24.09	24.19
26	24.29	24.39	24.49	24.59	24.69	24.79	24.89	24.99	25.09	25.19
27	25.29	25.39	25.49	25.59	25.69	25.79	25.89	25.99	26.09	26.19
28	26.29	26.39	26.49	26.59	26.69	26.79	26.89	26.99	27.09	27.19
29	27.29	27.39	27.49	27.58	27.68	27.78	27.88	27.98	28.08	28.18
30	28.28	28.38	28.48	28.58	28.68	28.78	28.88	28.98	29.08	29.18
31	29.28	29.38	29.48	29.58	29.68	29.78	29.88	29.98	30.08	30.18
32	30.28	30.38	30.48	30.58	30.68	30.78	30.88	30.98	31.08	31.18
33	31.28	31.38	31.48	31.58	31.68	31.78	31.88	31.98	32.08	32.18
34	32.28	32.37	32.47	32.57	32.67	32.77	32.87	32.97	33.07	33.17
35	33.27	33.37	33.47	33.57	33.67	33.77	33.87	33.97	34.07	34.17
36	34.27	34.37	34.47	34.57	34.67	34.77	34.87	34.97	35.07	35.17
37	35.27	35.37	35.47	35.57	35.67	35.77	35.87	35.97	36.07	36.17
38	36.27	36.37	36.47	36.57	36.67	36.77	36.87	36.97	37.07	37.17
39	37.27	37.37	37.47	37.57	37.67	37.77	37.87	37.97	38.07	38.17
40	38.27	38.37	38.47	38.57	38.67	38.77	38.87	38.96	39.06	39.16

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.39. NRCS Rainfall-Runoff Table for CN = 88



Runoff for inches of rainfall—Curve no. 88

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.10	0.15	0.20
1	0.25	0.31	0.38	0.44	0.51	0.58	0.66	0.73	0.81	0.89
2	0.97	1.05	1.13	1.21	1.30	1.38	1.47	1.56	1.64	1.73
3	1.82	1.91	2.00	2.09	2.18	2.27	2.36	2.45	2.55	2.64
4	2.73	2.82	2.92	3.01	3.11	3.20	3.29	3.39	3.48	3.58
5	3.67	3.77	3.86	3.96	4.05	4.15	4.24	4.34	4.44	4.53
6	4.63	4.73	4.82	4.92	5.02	5.11	5.21	5.31	5.40	5.50
7	5.60	5.69	5.79	5.89	5.99	6.08	6.18	6.28	6.38	6.47
8	6.57	6.67	6.77	6.87	6.96	7.06	7.16	7.26	7.36	7.45
9	7.55	7.65	7.75	7.85	7.94	8.04	8.14	8.24	8.34	8.44
10	8.53	8.63	8.73	8.83	8.93	9.03	9.13	9.22	9.32	9.42
11	9.52	9.62	9.72	9.82	9.92	10.01	10.11	10.21	10.31	10.41
12	10.51	10.61	10.71	10.81	10.91	11.00	11.10	11.20	11.30	11.40
13	11.50	11.60	11.70	11.80	11.90	11.99	12.09	12.19	12.29	12.39
14	12.49	12.59	12.69	12.79	12.89	12.99	13.09	13.19	13.28	13.38
15	13.48	13.58	13.68	13.78	13.88	13.98	14.08	14.18	14.28	14.38
16	14.48	14.58	14.67	14.77	14.87	14.97	15.07	15.17	15.27	15.37
17	15.47	15.57	15.67	15.77	15.87	15.97	16.07	16.17	16.27	16.37
18	16.46	16.56	16.66	16.76	16.86	16.96	17.06	17.16	17.26	17.36
19	17.46	17.56	17.66	17.76	17.86	17.96	18.06	18.16	18.26	18.36
20	18.46	18.56	18.65	18.75	18.85	18.95	19.05	19.15	19.25	19.35
21	19.45	19.55	19.65	19.75	19.85	19.95	20.05	20.15	20.25	20.35
22	20.45	20.55	20.65	20.75	20.85	20.95	21.05	21.15	21.25	21.35
23	21.44	21.54	21.64	21.74	21.84	21.94	22.04	22.14	22.24	22.34
24	22.44	22.54	22.64	22.74	22.84	22.94	23.04	23.14	23.24	23.34
25	23.44	23.54	23.64	23.74	23.84	23.94	24.04	24.14	24.24	24.34
26	24.44	24.54	24.64	24.74	24.84	24.94	25.03	25.13	25.23	25.33
27	25.43	25.53	25.63	25.73	25.83	25.93	26.03	26.13	26.23	26.33
28	26.43	26.53	26.63	26.73	26.83	26.93	27.03	27.13	27.23	27.33
29	27.43	27.53	27.63	27.73	27.83	27.93	28.03	28.13	28.23	28.33
30	28.43	28.53	28.63	28.73	28.83	28.93	29.03	29.13	29.23	29.33
31	29.43	29.53	29.63	29.73	29.82	29.92	30.02	30.12	30.22	30.32
32	30.42	30.52	30.62	30.72	30.82	30.92	31.02	31.12	31.22	31.32
33	31.42	31.52	31.62	31.72	31.82	31.92	32.02	32.12	32.22	32.32
34	32.42	32.52	32.62	32.72	32.82	32.92	33.02	33.12	33.22	33.32
35	33.42	33.52	33.62	33.72	33.82	33.92	34.02	34.12	34.22	34.32
36	34.42	34.52	34.62	34.72	34.82	34.92	35.02	35.12	35.22	35.32
37	35.42	35.52	35.62	35.72	35.82	35.92	36.02	36.12	36.22	36.32
38	36.42	36.52	36.62	36.71	36.81	36.91	37.01	37.11	37.21	37.31
39	37.41	37.51	37.61	37.71	37.81	37.91	38.01	38.11	38.21	38.31
40	38.41	38.51	38.61	38.71	38.81	38.91	39.01	39.11	39.21	39.31

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.40. NRCS Rainfall-Runoff Table for CN = 89

Curve
89

Runoff for inches of rainfall—Curve no. 89

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.12	0.17	0.22
1	0.28	0.35	0.41	0.48	0.55	0.63	0.71	0.78	0.86	0.94
2	1.03	1.11	1.19	1.28	1.37	1.45	1.54	1.63	1.72	1.81
3	1.90	1.99	2.08	2.17	2.26	2.35	2.45	2.54	2.63	2.73
4	2.82	2.91	3.01	3.10	3.20	3.29	3.39	3.48	3.58	3.67
5	3.77	3.86	3.96	4.06	4.15	4.25	4.35	4.44	4.54	4.64
6	4.73	4.83	4.93	5.02	5.12	5.22	5.31	5.41	5.51	5.61
7	5.70	5.80	5.90	6.00	6.10	6.19	6.29	6.39	6.49	6.58
8	6.68	6.78	6.88	6.98	7.08	7.17	7.27	7.37	7.47	7.57
9	7.67	7.76	7.86	7.96	8.06	8.16	8.26	8.36	8.45	8.55
10	8.65	8.75	8.85	8.95	9.05	9.15	9.24	9.34	9.44	9.54
11	9.64	9.74	9.84	9.94	10.04	10.14	10.23	10.33	10.43	10.53
12	10.63	10.73	10.83	10.93	11.03	11.13	11.23	11.32	11.42	11.52
13	11.62	11.72	11.82	11.92	12.02	12.12	12.22	12.32	12.42	12.52
14	12.61	12.71	12.81	12.91	13.01	13.11	13.21	13.31	13.41	13.51
15	13.61	13.71	13.81	13.91	14.01	14.11	14.20	14.30	14.40	14.50
16	14.60	14.70	14.80	14.90	15.00	15.10	15.20	15.30	15.40	15.50
17	15.60	15.70	15.80	15.90	16.00	16.10	16.19	16.29	16.39	16.49
18	16.59	16.69	16.79	16.89	16.99	17.09	17.19	17.29	17.39	17.49
19	17.59	17.69	17.79	17.89	17.99	18.09	18.19	18.29	18.39	18.49
20	18.59	18.68	18.78	18.88	18.98	19.08	19.18	19.28	19.38	19.48
21	19.58	19.68	19.78	19.88	19.98	20.08	20.18	20.28	20.38	20.48
22	20.58	20.68	20.78	20.88	20.98	21.08	21.18	21.28	21.38	21.48
23	21.58	21.68	21.78	21.88	21.98	22.07	22.17	22.27	22.37	22.47
24	22.57	22.67	22.77	22.87	22.97	23.07	23.17	23.27	23.37	23.47
25	23.57	23.67	23.77	23.87	23.97	24.07	24.17	24.27	24.37	24.47
26	24.57	24.67	24.77	24.87	24.97	25.07	25.17	25.27	25.37	25.47
27	25.57	25.67	25.77	25.87	25.97	26.07	26.17	26.27	26.37	26.47
28	26.57	26.66	26.76	26.86	26.96	27.06	27.16	27.26	27.36	27.46
29	27.56	27.66	27.76	27.86	27.96	28.06	28.16	28.26	28.36	28.46
30	28.56	28.66	28.76	28.86	28.96	29.06	29.16	29.26	29.36	29.46
31	29.56	29.66	29.76	29.86	29.96	30.06	30.16	30.26	30.36	30.46
32	30.56	30.66	30.76	30.86	30.96	31.06	31.16	31.26	31.36	31.46
33	31.56	31.66	31.76	31.86	31.96	32.06	32.16	32.26	32.36	32.46
34	32.56	32.66	32.76	32.86	32.96	33.06	33.16	33.26	33.35	33.45
35	33.55	33.65	33.75	33.85	33.95	34.05	34.15	34.25	34.35	34.45
36	34.55	34.65	34.75	34.85	34.95	35.05	35.15	35.25	35.35	35.45
37	35.55	35.65	35.75	35.85	35.95	36.05	36.15	36.25	36.35	36.45
38	36.55	36.65	36.75	36.85	36.95	37.05	37.15	37.25	37.35	37.45
39	37.55	37.65	37.75	37.85	37.95	38.05	38.15	38.25	38.35	38.45
40	38.55	38.65	38.75	38.85	38.95	39.05	39.15	39.25	39.35	39.45

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.41. NRCS Rainfall-Runoff Table for CN = 90



Runoff for inches of rainfall—Curve no. 90

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.01	0.02	0.06	0.10	0.14	0.20	0.26
1	0.32	0.39	0.46	0.53	0.61	0.68	0.76	0.84	0.93	1.01
2	1.09	1.18	1.27	1.35	1.44	1.53	1.62	1.71	1.80	1.89
3	1.98	2.08	2.17	2.26	2.36	2.45	2.54	2.64	2.73	2.83
4	2.92	3.02	3.11	3.21	3.30	3.40	3.49	3.59	3.68	3.78
5	3.88	3.97	4.07	4.17	4.26	4.36	4.46	4.56	4.65	4.75
6	4.85	4.94	5.04	5.14	5.24	5.33	5.43	5.53	5.63	5.73
7	5.82	5.92	6.02	6.12	6.22	6.31	6.41	6.51	6.61	6.71
8	6.81	6.91	7.00	7.10	7.20	7.30	7.40	7.50	7.60	7.69
9	7.79	7.89	7.99	8.09	8.19	8.29	8.39	8.48	8.58	8.68
10	8.78	8.88	8.98	9.08	9.18	9.28	9.38	9.47	9.57	9.67
11	9.77	9.87	9.97	10.07	10.17	10.27	10.37	10.47	10.57	10.66
12	10.76	10.86	10.96	11.06	11.16	11.26	11.36	11.46	11.56	11.66
13	11.76	11.86	11.96	12.05	12.15	12.25	12.35	12.45	12.55	12.65
14	12.75	12.85	12.95	13.05	13.15	13.25	13.35	13.45	13.55	13.65
15	13.75	13.85	13.94	14.04	14.14	14.24	14.34	14.44	14.54	14.64
16	14.74	14.84	14.94	15.04	15.14	15.24	15.34	15.44	15.54	15.64
17	15.74	15.84	15.94	16.04	16.14	16.24	16.33	16.43	16.53	16.63
18	16.73	16.83	16.93	17.03	17.13	17.23	17.33	17.43	17.53	17.63
19	17.73	17.83	17.93	18.03	18.13	18.23	18.33	18.43	18.53	18.63
20	18.73	18.83	18.93	19.03	19.13	19.23	19.33	19.43	19.52	19.62
21	19.72	19.82	19.92	20.02	20.12	20.22	20.32	20.42	20.52	20.62
22	20.72	20.82	20.92	21.02	21.12	21.22	21.32	21.42	21.52	21.62
23	21.72	21.82	21.92	22.02	22.12	22.22	22.32	22.42	22.52	22.62
24	22.72	22.82	22.92	23.02	23.12	23.22	23.32	23.42	23.52	23.62
25	23.72	23.82	23.92	24.02	24.11	24.21	24.31	24.41	24.51	24.61
26	24.71	24.81	24.91	25.01	25.11	25.21	25.31	25.41	25.51	25.61
27	25.71	25.81	25.91	26.01	26.11	26.21	26.31	26.41	26.51	26.61
28	26.71	26.81	26.91	27.01	27.11	27.21	27.31	27.41	27.51	27.61
29	27.71	27.81	27.91	28.01	28.11	28.21	28.31	28.41	28.51	28.61
30	28.71	28.81	28.91	29.01	29.11	29.21	29.31	29.41	29.51	29.61
31	29.71	29.81	29.91	30.01	30.11	30.21	30.31	30.41	30.51	30.61
32	30.71	30.81	30.91	31.01	31.11	31.20	31.30	31.40	31.50	31.60
33	31.70	31.80	31.90	32.00	32.10	32.20	32.30	32.40	32.50	32.60
34	32.70	32.80	32.90	33.00	33.10	33.20	33.30	33.40	33.50	33.60
35	33.70	33.80	33.90	34.00	34.10	34.20	34.30	34.40	34.50	34.60
36	34.70	34.80	34.90	35.00	35.10	35.20	35.30	35.40	35.50	35.60
37	35.70	35.80	35.90	36.00	36.10	36.20	36.30	36.40	36.50	36.60
38	36.70	36.80	36.90	37.00	37.10	37.20	37.30	37.40	37.50	37.60
39	37.70	37.80	37.90	38.00	38.10	38.20	38.30	38.40	38.50	38.60
40	38.70	38.80	38.90	39.00	39.10	39.20	39.30	39.40	39.50	39.60

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.42. NRCS Rainfall-Runoff Table for CN = 91

Curve
91

Runoff for inches of rainfall—Curve no. 91

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.17	0.23	0.29
1	0.36	0.43	0.50	0.58	0.66	0.74	0.82	0.91	0.99	1.08
2	1.16	1.25	1.34	1.43	1.52	1.61	1.70	1.79	1.89	1.98
3	2.07	2.16	2.26	2.35	2.45	2.54	2.64	2.73	2.83	2.92
4	3.02	3.11	3.21	3.31	3.40	3.50	3.59	3.69	3.79	3.89
5	3.98	4.08	4.18	4.27	4.37	4.47	4.57	4.66	4.76	4.86
6	4.96	5.06	5.15	5.25	5.35	5.45	5.55	5.64	5.74	5.84
7	5.94	6.04	6.14	6.23	6.33	6.43	6.53	6.63	6.73	6.83
8	6.92	7.02	7.12	7.22	7.32	7.42	7.52	7.62	7.72	7.81
9	7.91	8.01	8.11	8.21	8.31	8.41	8.51	8.61	8.71	8.80
10	8.90	9.00	9.10	9.20	9.30	9.40	9.50	9.60	9.70	9.80
11	9.90	10.00	10.09	10.19	10.29	10.39	10.49	10.59	10.69	10.79
12	10.89	10.99	11.09	11.19	11.29	11.39	11.49	11.59	11.69	11.78
13	11.88	11.98	12.08	12.18	12.28	12.38	12.48	12.58	12.68	12.78
14	12.88	12.98	13.08	13.18	13.28	13.38	13.48	13.58	13.68	13.78
15	13.88	13.97	14.07	14.17	14.27	14.37	14.47	14.57	14.67	14.77
16	14.87	14.97	15.07	15.17	15.27	15.37	15.47	15.57	15.67	15.77
17	15.87	15.97	16.07	16.17	16.27	16.37	16.47	16.57	16.67	16.77
18	16.87	16.96	17.06	17.16	17.26	17.36	17.46	17.56	17.66	17.76
19	17.86	17.96	18.06	18.16	18.26	18.36	18.46	18.56	18.66	18.76
20	18.86	18.96	19.06	19.16	19.26	19.36	19.46	19.56	19.66	19.76
21	19.86	19.96	20.06	20.16	20.26	20.36	20.46	20.56	20.66	20.76
22	20.86	20.96	21.06	21.16	21.26	21.36	21.46	21.55	21.65	21.75
23	21.85	21.95	22.05	22.15	22.25	22.35	22.45	22.55	22.65	22.75
24	22.85	22.95	23.05	23.15	23.25	23.35	23.45	23.55	23.65	23.75
25	23.85	23.95	24.05	24.15	24.25	24.35	24.45	24.55	24.65	24.75
26	24.85	24.95	25.05	25.15	25.25	25.35	25.45	25.55	25.65	25.75
27	25.85	25.95	26.05	26.15	26.25	26.35	26.45	26.55	26.65	26.75
28	26.85	26.95	27.05	27.15	27.25	27.35	27.45	27.55	27.65	27.75
29	27.85	27.95	28.05	28.15	28.25	28.35	28.45	28.55	28.65	28.75
30	28.84	28.94	29.04	29.14	29.24	29.34	29.44	29.54	29.64	29.74
31	29.84	29.94	30.04	30.14	30.24	30.34	30.44	30.54	30.64	30.74
32	30.84	30.94	31.04	31.14	31.24	31.34	31.44	31.54	31.64	31.74
33	31.84	31.94	32.04	32.14	32.24	32.34	32.44	32.54	32.64	32.74
34	32.84	32.94	33.04	33.14	33.24	33.34	33.44	33.54	33.64	33.74
35	33.84	33.94	34.04	34.14	34.24	34.34	34.44	34.54	34.64	34.74
36	34.84	34.94	35.04	35.14	35.24	35.34	35.44	35.54	35.64	35.74
37	35.84	35.94	36.04	36.14	36.24	36.34	36.44	36.54	36.64	36.74
38	36.84	36.94	37.04	37.14	37.24	37.34	37.44	37.54	37.64	37.74
39	37.84	37.94	38.04	38.14	38.24	38.34	38.44	38.54	38.64	38.74
40	38.84	38.94	39.04	39.14	39.24	39.34	39.44	39.54	39.64	39.74

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.43. NRCS Rainfall-Runoff Table for CN = 92

Curve
92

Runoff for inches of rainfall—Curve no. 92

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.02	0.05	0.09	0.14	0.20	0.26	0.33
1	0.40	0.48	0.56	0.64	0.72	0.80	0.89	0.97	1.06	1.15
2	1.24	1.33	1.42	1.51	1.60	1.69	1.79	1.88	1.97	2.07
3	2.16	2.26	2.35	2.45	2.54	2.64	2.73	2.83	2.92	3.02
4	3.12	3.21	3.31	3.41	3.50	3.60	3.70	3.80	3.89	3.99
5	4.09	4.19	4.28	4.38	4.48	4.58	4.68	4.77	4.87	4.97
6	5.07	5.17	5.27	5.36	5.46	5.56	5.66	5.76	5.86	5.96
7	6.05	6.15	6.25	6.35	6.45	6.55	6.65	6.75	6.85	6.94
8	7.04	7.14	7.24	7.34	7.44	7.54	7.64	7.74	7.84	7.93
9	8.03	8.13	8.23	8.33	8.43	8.53	8.63	8.73	8.83	8.93
10	9.03	9.13	9.23	9.32	9.42	9.52	9.62	9.72	9.82	9.92
11	10.02	10.12	10.22	10.32	10.42	10.52	10.62	10.72	10.82	10.92
12	11.02	11.12	11.21	11.31	11.41	11.51	11.61	11.71	11.81	11.91
13	12.01	12.11	12.21	12.31	12.41	12.51	12.61	12.71	12.81	12.91
14	13.01	13.11	13.21	13.31	13.41	13.51	13.61	13.71	13.80	13.90
15	14.00	14.10	14.20	14.30	14.40	14.50	14.60	14.70	14.80	14.90
16	15.00	15.10	15.20	15.30	15.40	15.50	15.60	15.70	15.80	15.90
17	16.00	16.10	16.20	16.30	16.40	16.50	16.60	16.70	16.80	16.90
18	17.00	17.10	17.20	17.30	17.40	17.50	17.60	17.70	17.79	17.89
19	17.99	18.09	18.19	18.29	18.39	18.49	18.59	18.69	18.79	18.89
20	18.99	19.09	19.19	19.29	19.39	19.49	19.59	19.69	19.79	19.89
21	19.99	20.09	20.19	20.29	20.39	20.49	20.59	20.69	20.79	20.89
22	20.99	21.09	21.19	21.29	21.39	21.49	21.59	21.69	21.79	21.89
23	21.99	22.09	22.19	22.29	22.39	22.49	22.59	22.69	22.79	22.89
24	22.99	23.09	23.19	23.29	23.39	23.49	23.59	23.69	23.79	23.89
25	23.99	24.09	24.19	24.29	24.39	24.48	24.58	24.68	24.78	24.88
26	24.98	25.08	25.18	25.28	25.38	25.48	25.58	25.68	25.78	25.88
27	25.98	26.08	26.18	26.28	26.38	26.48	26.58	26.68	26.78	26.88
28	26.98	27.08	27.18	27.28	27.38	27.48	27.58	27.68	27.78	27.88
29	27.98	28.08	28.18	28.28	28.38	28.48	28.58	28.68	28.78	28.88
30	28.98	29.08	29.18	29.28	29.38	29.48	29.58	29.68	29.78	29.88
31	29.98	30.08	30.18	30.28	30.38	30.48	30.58	30.68	30.78	30.88
32	30.98	31.08	31.18	31.28	31.38	31.48	31.58	31.68	31.78	31.88
33	31.98	32.08	32.18	32.28	32.38	32.48	32.58	32.68	32.78	32.88
34	32.98	33.08	33.18	33.28	33.38	33.48	33.58	33.68	33.78	33.88
35	33.98	34.08	34.18	34.28	34.38	34.48	34.58	34.68	34.78	34.88
36	34.98	35.08	35.18	35.28	35.38	35.48	35.58	35.68	35.78	35.88
37	35.98	36.08	36.18	36.28	36.38	36.48	36.58	36.68	36.78	36.88
38	36.98	37.08	37.18	37.28	37.38	37.48	37.58	37.68	37.78	37.88
39	37.98	38.08	38.17	38.27	38.37	38.47	38.57	38.67	38.77	38.87
40	38.97	39.07	39.17	39.27	39.37	39.47	39.57	39.67	39.77	39.87

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.44. NRCS Rainfall-Runoff Table for CN = 93

Curve
93

Runoff for inches of rainfall—Curve no. 93

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.00	0.02	0.06	0.11	0.17	0.23	0.30	0.37
1	0.45	0.53	0.61	0.69	0.78	0.87	0.95	1.04	1.13	1.22
2	1.31	1.41	1.50	1.59	1.69	1.78	1.87	1.97	2.06	2.16
3	2.25	2.35	2.45	2.54	2.64	2.73	2.83	2.93	3.03	3.12
4	3.22	3.32	3.41	3.51	3.61	3.71	3.81	3.90	4.00	4.10
5	4.20	4.30	4.39	4.49	4.59	4.69	4.79	4.89	4.98	5.08
6	5.18	5.28	5.38	5.48	5.58	5.68	5.78	5.87	5.97	6.07
7	6.17	6.27	6.37	6.47	6.57	6.67	6.77	6.86	6.96	7.06
8	7.16	7.26	7.36	7.46	7.56	7.66	7.76	7.86	7.96	8.06
9	8.16	8.25	8.35	8.45	8.55	8.65	8.75	8.85	8.95	9.05
10	9.15	9.25	9.35	9.45	9.55	9.65	9.75	9.85	9.95	10.05
11	10.15	10.24	10.34	10.44	10.54	10.64	10.74	10.84	10.94	11.04
12	11.14	11.24	11.34	11.44	11.54	11.64	11.74	11.84	11.94	12.04
13	12.14	12.24	12.34	12.44	12.54	12.64	12.74	12.84	12.94	13.04
14	13.14	13.23	13.33	13.43	13.53	13.63	13.73	13.83	13.93	14.03
15	14.13	14.23	14.33	14.43	14.53	14.63	14.73	14.83	14.93	15.03
16	15.13	15.23	15.33	15.43	15.53	15.63	15.73	15.83	15.93	16.03
17	16.13	16.23	16.33	16.43	16.53	16.63	16.73	16.83	16.93	17.03
18	17.13	17.23	17.33	17.43	17.53	17.63	17.73	17.83	17.93	18.03
19	18.13	18.23	18.33	18.42	18.52	18.62	18.72	18.82	18.92	19.02
20	19.12	19.22	19.32	19.42	19.52	19.62	19.72	19.82	19.92	20.02
21	20.12	20.22	20.32	20.42	20.52	20.62	20.72	20.82	20.92	21.02
22	21.12	21.22	21.32	21.42	21.52	21.62	21.72	21.82	21.92	22.02
23	22.12	22.22	22.32	22.42	22.52	22.62	22.72	22.82	22.92	23.02
24	23.12	23.22	23.32	23.42	23.52	23.62	23.72	23.82	23.92	24.02
25	24.12	24.22	24.32	24.42	24.52	24.62	24.72	24.82	24.92	25.02
26	25.12	25.22	25.32	25.42	25.52	25.62	25.72	25.82	25.92	26.02
27	26.12	26.22	26.32	26.42	26.52	26.62	26.72	26.82	26.92	27.02
28	27.12	27.22	27.32	27.42	27.52	27.62	27.72	27.82	27.92	28.02
29	28.12	28.22	28.32	28.42	28.52	28.62	28.72	28.82	28.92	29.01
30	29.11	29.21	29.31	29.41	29.51	29.61	29.71	29.81	29.91	30.01
31	30.11	30.21	30.31	30.41	30.51	30.61	30.71	30.81	30.91	31.01
32	31.11	31.21	31.31	31.41	31.51	31.61	31.71	31.81	31.91	32.01
33	32.11	32.21	32.31	32.41	32.51	32.61	32.71	32.81	32.91	33.01
34	33.11	33.21	33.31	33.41	33.51	33.61	33.71	33.81	33.91	34.01
35	34.11	34.21	34.31	34.41	34.51	34.61	34.71	34.81	34.91	35.01
36	35.11	35.21	35.31	35.41	35.51	35.61	35.71	35.81	35.91	36.01
37	36.11	36.21	36.31	36.41	36.51	36.61	36.71	36.81	36.91	37.01
38	37.11	37.21	37.31	37.41	37.51	37.61	37.71	37.81	37.91	38.01
39	38.11	38.21	38.31	38.41	38.51	38.61	38.71	38.81	38.91	39.01
40	39.11	39.21	39.31	39.41	39.51	39.61	39.71	39.81	39.91	40.01

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.45. NRCS Rainfall-Runoff Table for CN = 94

Curve
94

Runoff for inches of rainfall—Curve no. 94

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.01	0.04	0.08	0.14	0.20	0.27	0.35	0.42
1	0.50	0.59	0.67	0.76	0.85	0.94	1.03	1.12	1.21	1.30
2	1.40	1.49	1.58	1.68	1.77	1.87	1.97	2.06	2.16	2.25
3	2.35	2.45	2.54	2.64	2.74	2.84	2.93	3.03	3.13	3.23
4	3.32	3.42	3.52	3.62	3.72	3.82	3.91	4.01	4.11	4.21
5	4.31	4.41	4.51	4.60	4.70	4.80	4.90	5.00	5.10	5.20
6	5.30	5.40	5.50	5.59	5.69	5.79	5.89	5.99	6.09	6.19
7	6.29	6.39	6.49	6.59	6.69	6.79	6.88	6.98	7.08	7.18
8	7.28	7.38	7.48	7.58	7.68	7.78	7.88	7.98	8.08	8.18
9	8.28	8.38	8.48	8.58	8.68	8.78	8.87	8.97	9.07	9.17
10	9.27	9.37	9.47	9.57	9.67	9.77	9.87	9.97	10.07	10.17
11	10.27	10.37	10.47	10.57	10.67	10.77	10.87	10.97	11.07	11.17
12	11.27	11.37	11.47	11.57	11.67	11.77	11.87	11.97	12.06	12.16
13	12.26	12.36	12.46	12.56	12.66	12.76	12.86	12.96	13.06	13.16
14	13.26	13.36	13.46	13.56	13.66	13.76	13.86	13.96	14.06	14.16
15	14.26	14.36	14.46	14.56	14.66	14.76	14.86	14.96	15.06	15.16
16	15.26	15.36	15.46	15.56	15.66	15.76	15.86	15.96	16.06	16.16
17	16.26	16.36	16.46	16.56	16.66	16.76	16.86	16.96	17.06	17.16
18	17.26	17.36	17.46	17.56	17.66	17.76	17.86	17.96	18.06	18.16
19	18.26	18.36	18.46	18.55	18.65	18.75	18.85	18.95	19.05	19.15
20	19.25	19.35	19.45	19.55	19.65	19.75	19.85	19.95	20.05	20.15
21	20.25	20.35	20.45	20.55	20.65	20.75	20.85	20.95	21.05	21.15
22	21.25	21.35	21.45	21.55	21.65	21.75	21.85	21.95	22.05	22.15
23	22.25	22.35	22.45	22.55	22.65	22.75	22.85	22.95	23.05	23.15
24	23.25	23.35	23.45	23.55	23.65	23.75	23.85	23.95	24.05	24.15
25	24.25	24.35	24.45	24.55	24.65	24.75	24.85	24.95	25.05	25.15
26	25.25	25.35	25.45	25.55	25.65	25.75	25.85	25.95	26.05	26.15
27	26.25	26.35	26.45	26.55	26.65	26.75	26.85	26.95	27.05	27.15
28	27.25	27.35	27.45	27.55	27.65	27.75	27.85	27.95	28.05	28.15
29	28.25	28.35	28.45	28.55	28.65	28.75	28.85	28.95	29.05	29.15
30	29.25	29.35	29.45	29.55	29.65	29.75	29.85	29.95	30.05	30.15
31	30.25	30.35	30.45	30.55	30.65	30.75	30.85	30.95	31.05	31.15
32	31.25	31.35	31.45	31.55	31.65	31.75	31.85	31.95	32.05	32.15
33	32.25	32.35	32.45	32.55	32.65	32.75	32.85	32.95	33.05	33.15
34	33.25	33.35	33.45	33.55	33.65	33.75	33.85	33.95	34.05	34.15
35	34.25	34.35	34.45	34.55	34.65	34.75	34.85	34.95	35.05	35.15
36	35.25	35.35	35.45	35.55	35.65	35.75	35.85	35.95	36.05	36.15
37	36.25	36.35	36.45	36.55	36.65	36.75	36.85	36.95	37.05	37.14
38	37.24	37.34	37.44	37.54	37.64	37.74	37.84	37.94	38.04	38.14
39	38.24	38.34	38.44	38.54	38.64	38.74	38.84	38.94	39.04	39.14
40	39.24	39.34	39.44	39.54	39.64	39.74	39.84	39.94	40.04	40.14

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.46. NRCS Rainfall-Runoff Table for CN = 95

Curve
95

Runoff for inches of rainfall—Curve no. 95

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.01	0.05	0.11	0.17	0.24	0.32	0.40	0.48
1	0.56	0.65	0.74	0.83	0.92	1.01	1.11	1.20	1.29	1.39
2	1.48	1.58	1.67	1.77	1.87	1.96	2.06	2.16	2.25	2.35
3	2.45	2.55	2.65	2.74	2.84	2.94	3.04	3.14	3.23	3.33
4	3.43	3.53	3.63	3.73	3.83	3.93	4.02	4.12	4.22	4.32
5	4.42	4.52	4.62	4.72	4.82	4.92	5.01	5.11	5.21	5.31
6	5.41	5.51	5.61	5.71	5.81	5.91	6.01	6.11	6.21	6.31
7	6.41	6.51	6.61	6.70	6.80	6.90	7.00	7.10	7.20	7.30
8	7.40	7.50	7.60	7.70	7.80	7.90	8.00	8.10	8.20	8.30
9	8.40	8.50	8.60	8.70	8.80	8.90	9.00	9.10	9.20	9.30
10	9.40	9.50	9.59	9.69	9.79	9.89	9.99	10.09	10.19	10.29
11	10.39	10.49	10.59	10.69	10.79	10.89	10.99	11.09	11.19	11.29
12	11.39	11.49	11.59	11.69	11.79	11.89	11.99	12.09	12.19	12.29
13	12.39	12.49	12.59	12.69	12.79	12.89	12.99	13.09	13.19	13.29
14	13.39	13.49	13.59	13.69	13.79	13.89	13.99	14.09	14.19	14.29
15	14.39	14.49	14.59	14.69	14.79	14.89	14.99	15.09	15.19	15.29
16	15.39	15.49	15.59	15.69	15.79	15.89	15.99	16.08	16.18	16.28
17	16.38	16.48	16.58	16.68	16.78	16.88	16.98	17.08	17.18	17.28
18	17.38	17.48	17.58	17.68	17.78	17.88	17.98	18.08	18.18	18.28
19	18.38	18.48	18.58	18.68	18.78	18.88	18.98	19.08	19.18	19.28
20	19.38	19.48	19.58	19.68	19.78	19.88	19.98	20.08	20.18	20.28
21	20.38	20.48	20.58	20.68	20.78	20.88	20.98	21.08	21.18	21.28
22	21.38	21.48	21.58	21.68	21.78	21.88	21.98	22.08	22.18	22.28
23	22.38	22.48	22.58	22.68	22.78	22.88	22.98	23.08	23.18	23.28
24	23.38	23.48	23.58	23.68	23.78	23.88	23.98	24.08	24.18	24.28
25	24.38	24.48	24.58	24.68	24.78	24.88	24.98	25.08	25.18	25.28
26	25.38	25.48	25.58	25.68	25.78	25.88	25.98	26.08	26.18	26.28
27	26.38	26.48	26.58	26.68	26.78	26.88	26.98	27.08	27.18	27.28
28	27.38	27.48	27.58	27.68	27.78	27.88	27.98	28.08	28.18	28.28
29	28.38	28.48	28.58	28.68	28.78	28.88	28.98	29.08	29.18	29.28
30	29.38	29.48	29.58	29.68	29.78	29.88	29.98	30.08	30.18	30.28
31	30.38	30.48	30.58	30.68	30.78	30.88	30.98	31.08	31.18	31.28
32	31.38	31.48	31.58	31.68	31.78	31.88	31.98	32.08	32.18	32.28
33	32.38	32.48	32.58	32.68	32.78	32.88	32.98	33.08	33.18	33.28
34	33.38	33.48	33.58	33.68	33.78	33.88	33.98	34.08	34.18	34.28
35	34.38	34.48	34.58	34.68	34.78	34.88	34.98	35.08	35.18	35.28
36	35.38	35.48	35.58	35.68	35.78	35.88	35.98	36.08	36.18	36.28
37	36.38	36.48	36.58	36.68	36.78	36.88	36.98	37.08	37.18	37.28
38	37.38	37.48	37.58	37.68	37.78	37.88	37.98	38.08	38.18	38.28
39	38.38	38.48	38.58	38.68	38.78	38.88	38.98	39.08	39.18	39.28
40	39.38	39.48	39.58	39.68	39.78	39.88	39.98	40.08	40.18	40.28

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.47. NRCS Rainfall-Runoff Table for CN = 96



Runoff for inches of rainfall—Curve no. 96

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.03	0.07	0.14	0.21	0.29	0.37	0.45	0.54
1	0.63	0.72	0.81	0.91	1.00	1.09	1.19	1.29	1.38	1.48
2	1.57	1.67	1.77	1.87	1.96	2.06	2.16	2.26	2.36	2.45
3	2.55	2.65	2.75	2.85	2.95	3.04	3.14	3.24	3.34	3.44
4	3.54	3.64	3.74	3.84	3.94	4.04	4.13	4.23	4.33	4.43
5	4.53	4.63	4.73	4.83	4.93	5.03	5.13	5.23	5.33	5.43
6	5.53	5.63	5.73	5.83	5.93	6.03	6.12	6.22	6.32	6.42
7	6.52	6.62	6.72	6.82	6.92	7.02	7.12	7.22	7.32	7.42
8	7.52	7.62	7.72	7.82	7.92	8.02	8.12	8.22	8.32	8.42
9	8.52	8.62	8.72	8.82	8.92	9.02	9.12	9.22	9.32	9.42
10	9.52	9.62	9.72	9.82	9.92	10.02	10.12	10.22	10.32	10.42
11	10.51	10.61	10.71	10.81	10.91	11.01	11.11	11.21	11.31	11.41
12	11.51	11.61	11.71	11.81	11.91	12.01	12.11	12.21	12.31	12.41
13	12.51	12.61	12.71	12.81	12.91	13.01	13.11	13.21	13.31	13.41
14	13.51	13.61	13.71	13.81	13.91	14.01	14.11	14.21	14.31	14.41
15	14.51	14.61	14.71	14.81	14.91	15.01	15.11	15.21	15.31	15.41
16	15.51	15.61	15.71	15.81	15.91	16.01	16.11	16.21	16.31	16.41
17	16.51	16.61	16.71	16.81	16.91	17.01	17.11	17.21	17.31	17.41
18	17.51	17.61	17.71	17.81	17.91	18.01	18.11	18.21	18.31	18.41
19	18.51	18.61	18.71	18.81	18.91	19.01	19.11	19.21	19.31	19.41
20	19.51	19.61	19.71	19.81	19.91	20.01	20.11	20.21	20.31	20.41
21	20.51	20.61	20.71	20.81	20.91	21.01	21.11	21.21	21.31	21.41
22	21.51	21.61	21.71	21.81	21.91	22.01	22.11	22.21	22.31	22.41
23	22.51	22.61	22.71	22.81	22.91	23.01	23.11	23.21	23.31	23.41
24	23.51	23.61	23.71	23.81	23.91	24.01	24.11	24.21	24.31	24.41
25	24.51	24.61	24.71	24.81	24.91	25.01	25.11	25.21	25.31	25.41
26	25.51	25.61	25.71	25.81	25.91	26.01	26.11	26.21	26.31	26.41
27	26.51	26.61	26.71	26.81	26.91	27.01	27.11	27.21	27.31	27.41
28	27.51	27.61	27.71	27.81	27.91	28.01	28.11	28.21	28.31	28.41
29	28.51	28.61	28.71	28.81	28.91	29.01	29.11	29.21	29.31	29.41
30	29.51	29.61	29.71	29.81	29.91	30.01	30.11	30.21	30.31	30.41
31	30.51	30.61	30.71	30.81	30.91	31.01	31.11	31.21	31.31	31.40
32	31.50	31.60	31.70	31.80	31.90	32.00	32.10	32.20	32.30	32.40
33	32.50	32.60	32.70	32.80	32.90	33.00	33.10	33.20	33.30	33.40
34	33.50	33.60	33.70	33.80	33.90	34.00	34.10	34.20	34.30	34.40
35	34.50	34.60	34.70	34.80	34.90	35.00	35.10	35.20	35.30	35.40
36	35.50	35.60	35.70	35.80	35.90	36.00	36.10	36.20	36.30	36.40
37	36.50	36.60	36.70	36.80	36.90	37.00	37.10	37.20	37.30	37.40
38	37.50	37.60	37.70	37.80	37.90	38.00	38.10	38.20	38.30	38.40
39	38.50	38.60	38.70	38.80	38.90	39.00	39.10	39.20	39.30	39.40
40	39.50	39.60	39.70	39.80	39.90	40.00	40.10	40.20	40.30	40.40

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.48. NRCS Rainfall-Runoff Table for CN = 97

Curve
97

Runoff for inches of rainfall—Curve no. 97

Inches	Tenths									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.00	0.04	0.10	0.18	0.26	0.34	0.43	0.52	0.61
1	0.71	0.80	0.90	0.99	1.09	1.18	1.28	1.38	1.48	1.57
2	1.67	1.77	1.87	1.97	2.07	2.16	2.26	2.36	2.46	2.56
3	2.66	2.76	2.86	2.96	3.06	3.15	3.25	3.35	3.45	3.55
4	3.65	3.75	3.85	3.95	4.05	4.15	4.25	4.35	4.45	4.55
5	4.65	4.75	4.85	4.95	5.05	5.15	5.25	5.35	5.44	5.54
6	5.64	5.74	5.84	5.94	6.04	6.14	6.24	6.34	6.44	6.54
7	6.64	6.74	6.84	6.94	7.04	7.14	7.24	7.34	7.44	7.54
8	7.64	7.74	7.84	7.94	8.04	8.14	8.24	8.34	8.44	8.54
9	8.64	8.74	8.84	8.94	9.04	9.14	9.24	9.34	9.44	9.54
10	9.64	9.74	9.84	9.94	10.04	10.14	10.24	10.34	10.44	10.54
11	10.64	10.74	10.84	10.94	11.04	11.14	11.24	11.34	11.44	11.54
12	11.64	11.74	11.84	11.94	12.04	12.14	12.24	12.34	12.44	12.54
13	12.64	12.74	12.84	12.94	13.04	13.14	13.24	13.34	13.44	13.54
14	13.64	13.74	13.84	13.94	14.04	14.14	14.24	14.34	14.44	14.54
15	14.64	14.74	14.84	14.94	15.04	15.14	15.24	15.34	15.44	15.54
16	15.64	15.74	15.84	15.93	16.03	16.13	16.23	16.33	16.43	16.53
17	16.63	16.73	16.83	16.93	17.03	17.13	17.23	17.33	17.43	17.53
18	17.63	17.73	17.83	17.93	18.03	18.13	18.23	18.33	18.43	18.53
19	18.63	18.73	18.83	18.93	19.03	19.13	19.23	19.33	19.43	19.53
20	19.63	19.73	19.83	19.93	20.03	20.13	20.23	20.33	20.43	20.53
21	20.63	20.73	20.83	20.93	21.03	21.13	21.23	21.33	21.43	21.53
22	21.63	21.73	21.83	21.93	22.03	22.13	22.23	22.33	22.43	22.53
23	22.63	22.73	22.83	22.93	23.03	23.13	23.23	23.33	23.43	23.53
24	23.63	23.73	23.83	23.93	24.03	24.13	24.23	24.33	24.43	24.53
25	24.63	24.73	24.83	24.93	25.03	25.13	25.23	25.33	25.43	25.53
26	25.63	25.73	25.83	25.93	26.03	26.13	26.23	26.33	26.43	26.53
27	26.63	26.73	26.83	26.93	27.03	27.13	27.23	27.33	27.43	27.53
28	27.63	27.73	27.83	27.93	28.03	28.13	28.23	28.33	28.43	28.53
29	28.63	28.73	28.83	28.93	29.03	29.13	29.23	29.33	29.43	29.53
30	29.63	29.73	29.83	29.93	30.03	30.13	30.23	30.33	30.43	30.53
31	30.63	30.73	30.83	30.93	31.03	31.13	31.23	31.33	31.43	31.53
32	31.63	31.73	31.83	31.93	32.03	32.13	32.23	32.33	32.43	32.53
33	32.63	32.73	32.83	32.93	33.03	33.13	33.23	33.33	33.43	33.53
34	33.63	33.73	33.83	33.93	34.03	34.13	34.23	34.33	34.43	34.53
35	34.63	34.73	34.83	34.93	35.03	35.13	35.23	35.33	35.43	35.53
36	35.63	35.73	35.83	35.93	36.03	36.13	36.23	36.33	36.43	36.53
37	36.63	36.73	36.83	36.93	37.03	37.13	37.23	37.33	37.43	37.53
38	37.63	37.73	37.83	37.93	38.03	38.13	38.23	38.33	38.43	38.53
39	38.63	38.73	38.83	38.93	39.03	39.13	39.23	39.33	39.43	39.53
40	39.63	39.73	39.83	39.93	40.03	40.13	40.23	40.33	40.43	40.53

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Table 11-C.49. NRCS Rainfall-Runoff Table for CN = 98



Runoff for inches of rainfall—Curve no. 98

Inches	-----Tenths-----									
	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0	0.00	0.01	0.07	0.15	0.23	0.32	0.41	0.50	0.60	0.69
1	0.79	0.89	0.99	1.08	1.18	1.28	1.38	1.48	1.58	1.68
2	1.77	1.87	1.97	2.07	2.17	2.27	2.37	2.47	2.57	2.67
3	2.77	2.87	2.97	3.07	3.17	3.27	3.37	3.47	3.57	3.67
4	3.77	3.86	3.96	4.06	4.16	4.26	4.36	4.46	4.56	4.66
5	4.76	4.86	4.96	5.06	5.16	5.26	5.36	5.46	5.56	5.66
6	5.76	5.86	5.96	6.06	6.16	6.26	6.36	6.46	6.56	6.66
7	6.76	6.86	6.96	7.06	7.16	7.26	7.36	7.46	7.56	7.66
8	7.76	7.86	7.96	8.06	8.16	8.26	8.36	8.46	8.56	8.66
9	8.76	8.86	8.96	9.06	9.16	9.26	9.36	9.46	9.56	9.66
10	9.76	9.86	9.96	10.06	10.16	10.26	10.36	10.46	10.56	10.66
11	10.76	10.86	10.96	11.06	11.16	11.26	11.36	11.46	11.56	11.66
12	11.76	11.86	11.96	12.06	12.16	12.26	12.36	12.46	12.56	12.66
13	12.76	12.86	12.96	13.06	13.16	13.26	13.36	13.46	13.56	13.66
14	13.76	13.86	13.96	14.06	14.16	14.26	14.36	14.46	14.56	14.66
15	14.76	14.86	14.96	15.06	15.16	15.26	15.36	15.46	15.56	15.66
16	15.76	15.86	15.96	16.06	16.16	16.26	16.36	16.46	16.56	16.66
17	16.76	16.86	16.96	17.06	17.16	17.26	17.36	17.46	17.56	17.66
18	17.76	17.86	17.96	18.06	18.16	18.26	18.36	18.46	18.56	18.66
19	18.76	18.86	18.96	19.06	19.16	19.26	19.36	19.46	19.56	19.66
20	19.76	19.86	19.96	20.06	20.16	20.26	20.36	20.46	20.56	20.66
21	20.76	20.86	20.96	21.06	21.16	21.26	21.36	21.46	21.56	21.66
22	21.76	21.86	21.96	22.06	22.16	22.26	22.36	22.46	22.56	22.66
23	22.76	22.86	22.96	23.06	23.16	23.26	23.36	23.46	23.56	23.66
24	23.76	23.86	23.96	24.06	24.16	24.26	24.36	24.46	24.56	24.66
25	24.76	24.86	24.96	25.06	25.16	25.26	25.36	25.46	25.56	25.66
26	25.76	25.86	25.96	26.06	26.16	26.26	26.36	26.46	26.56	26.66
27	26.76	26.86	26.96	27.06	27.16	27.26	27.36	27.46	27.56	27.66
28	27.76	27.86	27.96	28.06	28.16	28.26	28.36	28.46	28.56	28.66
29	28.76	28.86	28.96	29.06	29.16	29.26	29.36	29.46	29.56	29.66
30	29.76	29.86	29.96	30.06	30.16	30.26	30.36	30.46	30.56	30.66
31	30.76	30.86	30.96	31.06	31.16	31.26	31.36	31.46	31.56	31.66
32	31.76	31.86	31.96	32.06	32.16	32.26	32.36	32.46	32.56	32.66
33	32.76	32.86	32.96	33.06	33.16	33.26	33.36	33.46	33.56	33.66
34	33.76	33.86	33.96	34.06	34.16	34.26	34.36	34.46	34.56	34.66
35	34.76	34.86	34.96	35.06	35.16	35.26	35.36	35.46	35.56	35.66
36	35.76	35.86	35.96	36.06	36.16	36.26	36.36	36.46	36.56	36.66
37	36.76	36.86	36.96	37.06	37.16	37.26	37.36	37.46	37.56	37.66
38	37.76	37.86	37.96	38.06	38.16	38.26	38.36	38.46	38.56	38.66
39	38.76	38.86	38.96	39.06	39.16	39.26	39.36	39.46	39.56	39.66
40	39.76	39.86	39.96	40.06	40.16	40.26	40.36	40.46	40.56	40.66

Note: Runoff value determined by equation $Q = \frac{(P - 0.2S)^2}{P + 0.8S}$

Appendix 11-D

STORMWATER COMPUTER MODELS

Table of Contents

11-D.0	INTRODUCTION	11-D-2
11-D.1	THE MODELING PROCESS	11-D-4
	11-D.1.1 Model Objectives	11-D-4
	11-D.1.2 Model Constraints	11-D-5
	11-D.1.3 Selection and Implementation	11-D-6
11-D.2	SUMMARY OF COMMONLY USED MODELS	11-D-7
	11-D.2.1 Hydrology Programs	11-D-9
	11-D.2.1.1 HEC-GeoHMS: Geospatial Hydrologic Modeling System	11-D-9
	11-D.2.1.2 HEC-HMS: Hydrologic Modeling/Flood Hydrograph System	11-D-9
	11-D.2.1.3 USDA-NRCS Technical Release 55 (TR-55)	11-D-10
	11-D.2.1.4 USDA-NRCS Technical Release 20 (TR-20)	11-D-10
	11-D.2.1.5 PondPack	11-D-10
	11-D.2.1.6 Watershed Modeling System (WMS)	11-D-11
	11-D.2.1.7 Watershed Modeling	11-D-11
	11-D.2.2 Hydraulics Programs	11-D-11
	11-D.2.2.1 HEC-GeoRAS: Geospatial River Analysis System	11-D-11
	11-D.2.2.2 HEC-RAS: River Analysis System	11-D-12
	11-D.2.2.3 WSPRO	11-D-13
	11-D.2.2.4 EPA-Storm Water Management Model (SWMM)	11-D-13
	11-D.2.2.5 FHWA HY-8 Culvert Analysis	11-D-14
	11-D.2.2.6 CulvertMaster	11-D-14
	11-D.2.2.7 FlowMaster	11-D-14
	13-E.2.3 Water Quality Programs	11-D-15
	11-D.2.3.1 Virginia Runoff Reduction Method	11-D-15
	11-D.2.3.2 Hydrologic Simulation Program FORTRAN (HSPF)	11-D-15
	11-D.2.3.3 Better Assessment Science Integrating Point and Nonpoint Sources (BASINS)	11-D-15
	11-D.2.3.4 QUAL2EU: Enhanced Stream Water Quality Model	11-D-16
	11-D.2.3.5 Water Quality Analysis Simulation Program (WASP5)	11-D-16
	11-E.2.3.6 Source Loading and Management Model (SLAMM)	11-D-16
11-D.3	REFERENCES	11-D-17

TABLES

Table 11-D.1	Stormwater Modeling Programs and Design Tools	11-D-8
--------------	---	--------

11-D.0. INTRODUCTION

In urban stormwater management there are typically three types of models used commonly: *hydrologic*, *hydraulic* and *water quality* models. There are also a number of other specialty models to simulate ancillary issues (some of which are sub-sets of the three main categories) such as sediment transport, channel stability, lake quality, dissolved oxygen and evapotranspiration. This Appendix includes information about a number of useful models, some in the public domain and available for free, and others that are proprietary, for which prices can vary dramatically. The models described in this Appendix are some of the most popular models in current use, but inclusion of their descriptions does not constitute any endorsement of their use by DEQ or the Commonwealth of Virginia.

Hydrologic Models attempt to simulate the rainfall-runoff process to tell us “how much runoff, how often.” They use rainfall information or simulations and land cover characteristics to provide runoff characteristics including peak flow rates, flood hydrographs and flow frequencies. Hydrologic models can be:

- **Deterministic** – giving one answer for a specific input set, OR
- **Stochastic** – involving random inputs giving any number of responses for a given set of parameters.
- **Single Event** – simulating one storm event.
- **Continuous** – simulating many storm events over a period of time, OR
- **Lumped** – representing a large watershed by a single set of parameters, OR
- **Distributed** – watersheds are broken into many small homogeneous subwatersheds, each of which has a complete hydrologic calculation made on it.

Hydraulic Models take a known flow amount (typically the output of a hydrologic model) and provide information about flow height, location, velocity, direction and pressure. Hydraulic models share some of the differing characteristics of hydrologic models (continuous vs. single event) and add:

- **One-dimensional** – calculating flow information in one direction (e.g. downstream) only, OR
- **Multi-dimensional** – calculating flow information in several dimensions (e.g. in and out of the channel and downstream). Two-dimensional models are particularly useful when the overall channel pattern changes and bank erosion are concerns.
- **Steady** – having a single unchanging flow velocity value at a point in the system, OR
- **Unsteady** – having flow velocities that change with time at a point in the system.
- **Uniform** – a state of steady flow when the mean velocity and cross-sectional area remain constant over distance in all sections of a reach (assuming the channel slope and energy slope are equal), OR
- **Non-uniform** – a state of dynamic flow over distance (derived by solving a more complex formulation of the energy and momentum equations).

For most problems encountered in hydraulics, a simple one-dimensional, steady model will work well. But if the volume and time distribution of flow are important (for example, in a steeper stream with storage behind a series of high culvert embankments) or the behavior of a channel over a storm hydrograph is needed, then an unsteady model is called for. If there is a need to predict with accuracy the ebb and flow of floodwater out of a channel (for example in a wide, flat floodplain where there are relief openings under a road) or bank erosion potential, then a 2-dimensional model becomes necessary. If pressure flow and the accurate computation of a hydraulic grade line are important, then an unsteady, non-uniform model with pressure flow calculating capabilities is needed.

Water Quality Models: The goal in water quality modeling is to adequately simulate the various processes and interactions of stormwater pollution. Water quality models have been developed with an ability to predict loadings of various types of stormwater pollutants.

Water quality models can become very complex if the complete cycle of buildup, wash-off and impact are determined. These models share the various features of hydrologic and hydraulic models in that it is the runoff flow that carries the pollutants. Therefore, a continuous hydrologic model with estimated pollution concentrations becomes a continuous water quality pollution model. Water quality models can reflect pollution from both point and nonpoint sources.

Water quality models tend to have applications that are targeted toward specific pollutants, source types or receiving waters. Some models involve biological processes as well as physical and chemical processes. Often great simplifications or gross assumptions are necessary to be able to model pollutant accumulations, transformations and eventual impacts. Such simplifications cannot be disregarded when interpreting model results.

Simple spreadsheet-based loading models involve an estimate of the runoff volume which, when multiplied by an event mean concentration, provide an estimate of the total pollution loading. Because of the lack of ability to calibrate such models for variable physical parameters, such simple models tend to be more accurate when they reflect a longer time period over which the pollution load is averaged. An annual pollutant load prediction may tend toward a central estimate, while any specific storm prediction may be grossly in error when compared to actual loadings because antecedent conditions vary widely from week to week. In reality, it is easy for one storm to discharge a lot of P and N that can then get masked by a lot of smaller storms. Unless each storm's loading is considered (which can also be done rather simply using spreadsheet programs), we may not be able to accurately identify the actual sources of these inputs, which must be addressed to effectively reduce stormwater pollution.

On the other hand, simulation models have the ability to adjust a number of loading parameters for calibration purposes and can simulate pollution accumulation over a long period. They can then more reliably predict loadings for any specific storm event.

Calibration data is always recommended in hydrologic or hydraulic models for an acceptably accurate answer. In water quality models the non-calibrated prediction is often off by orders of magnitude. Water quality predictions are not credible without adequate site-specific data for

calibration and verification. However, even without specifically accurate loading values, the relative effects of pollution abatement controls *can* be tested using uncalibrated models. But actual site-specific data should be incorporated whenever possible. Sampling is at a point where a small amount of localized data can be easily collected, and will significantly improve the model's results.

Computer Model Applications. Stormwater computer models can also be categorized by their use or application:

- **Screening-level models** are typically equations or spreadsheet models that give a first estimate of the magnitude of urban runoff quality or quantity. Sometimes this is the only level that is necessary to provide answers, when the answer needs to be only approximate or because there is no data to justify a more refined procedure. The user should then consider efforts to collect more data in order to utilize more sophisticated models to achieve a more robust answer.
- **Planning-level models** are used to perform “what if” analyses, comparing design alternatives or control options in a general way. They are used to establish flow frequencies, floodplain boundaries, and general pollution loading values.
- **Design-level models** are oriented toward the detailed simulation of a single storm event for the purposes of urban stormwater design. They provide a more complete description of flow or pollution values anywhere in the system of concern and allow for adjustment of various input and output variables in some detail. They can be more exact in the impact of control options, and tend to have a better ability to be calibrated to fit observed data.
- **Operational models** are used to produce actual control decisions during a storm event. They are often linked with SCADA systems. They are often developed from modified or strongly calibrated design models, or can be developed on a site-specific basis to appropriately link with the system of concern and accurately model the important physical phenomena.

11-D.1.0. THE MODELING PROCESS

The overall modeling process involves: (1) development of study or model objectives, (2) identification of resources and constraints, (3) selection and implementation of the model itself, and finally, (4) identification of the data needed to run the model.

11-D.1.1. Model Objectives

It is important to know specifically what answers are needed, to what accuracy, and in what format. Requiring a simple peak flow is far different from needing to know the timing of peaks from several different intersecting watersheds. Estimating future floodplain elevations along a reach is a fundamentally different problem than finding the probability of roadway overtopping.

A review of the problem begins the process of determining the model objectives. These objectives also establish a performance or design criteria for the model. Must the system handle the 25-year storm? Are future conditions important? Which ones? Are annual loadings of pollution adequate? Which pollutants?

Those aspects of the system to be modeled will dictate what models are appropriate for use. For example, if storm sewers are present then an open channel model can be ruled out as an appropriate model for the entire system. If a specific type of hydraulic structure is present that a standard model cannot handle, an alternate way to simulate that structure will be necessary. Model objectives also explain how the numbers generated from the model will relate to the needs of the study. For example, if a cost-benefit analysis is required, the model results must be interpreted in terms of overall life-cycle cost and not simply in terms of discharge rate.

11-D.1.2. Model Constraints

Availability of data, funds, time and user ability can potentially constrain modeling solutions. The goal of any modeling effort is to develop an approach that stays within the constraints dictated while addressing the needs of the study identified in the previous step. Data collection/availability and cost are usually the chief constraints.

Sources of existing available data should be researched. Look for data that tends to “ground truth” model outputs. Even partial data can be useful if it helps to validate the model or modeling results. After existing data sources have been identified, the need to gather additional data is assessed. Automated processes and systems such as GPS can reduce both cost and human error. A consideration of the long-term use of data and its maintenance is necessary. For example, if the model is to eventually become an operational model, the ability to maintain the data in a cost effective way becomes of paramount importance.

Accuracy and the corresponding necessary level of detail are of overriding importance. Accuracy depends on both the accuracy of the input data and the degree to which the model adequately represents the hydrologic, hydraulic or water quality processes being modeled. For example, if lumped hydrologic parameters are adequate, then the cost of the modeling effort can be reduced. However, the ability to determine information within the sub-basin represented by a single parameter is lost. Changing model needs from an average 500-acre sub-basin size to a 50-acre size can increase the cost of a model almost 10-fold. Is the additional information derived worth the additional cost?

Both risk and uncertainty affect the modeler’s ability to predict results accurately. Risk is an estimated chance of an occurrence, such as flooding. Uncertainty is the error associated with measuring or estimating key parameters or functions. Uncertainty arises due to errors in sampling, measurement, estimation and forecasting, and modeling. For hydrologic and hydraulic analysis, stage and discharge are of prime importance. Uncertainty in discharge is due to short or non-existent flood records, inaccurate rainfall-runoff modeling, and inaccuracy in known flood flow regulation where it exists. Stage uncertainty comes from errors and unknowns in roughness, geometry, etc.

Accuracy developed in one area can be impacted by rough estimates in another, negating the technological gains. For example, the gains in accuracy from very precise field surveys of cross sections can be lost if the estimates of roughness coefficients or discharge rates are very approximate.

Sensitivity analysis involves holding all parameters constant except one and assessing the change in the output variable of concern based on a certain percent change in the input variable. Those variables that are amplified in the output should be estimated with higher accuracy and with a more detailed consideration of the potential range of values and the need for conservative design. The modeler must try to assess how accurate estimates are and account for risk and uncertainty through estimating the range of potential error and choosing values that balance conservative engineering with cost consciousness. The designer typically develops a "most likely" estimate of a certain design parameter (for example, 10-year storm rainfall or Manning's roughness coefficient) and then uses sensitivity analysis to test the impact of variability in the parameter estimate on the final solution.

11-D.1.3. Selection and Implementation

Once the model objectives and constraints have been evaluated, the model (or models) is selected and the study or design is implemented. Typical steps in model implementation include validation, calibration, verification and production.

Validation involves a determination that the model is structured and coded as intended for the range of variables to be encountered in the study. Validation tests key algorithms for accuracy. For example, if a hydrologic model cannot handle short time steps or long time periods it cannot be used without modification. If a certain model begins to lose accuracy at high or low imperviousness or cannot accurately handle backwater situations, and these will be encountered in practice the model cannot be used. Often validation is a one-time effort, after which the modeler is comfortable with the model's "quirks" and knows how to deal with them. Validation often involves pushing parameters to the limit of reasonable extent to test an algorithm. For example, in a hydrologic model infiltration can be reduced to zero to test if the input and output hydrographs are equal. Or the model can be run with small rainfalls using porous soils to determine if no runoff is generated, or only runoff from directly connected impervious areas.

Calibration is the comparison of a model to field measurements, other known estimates of output (e.g. regression equations), or another model known to be accurate, and the subsequent adjustment of the model to best fit those measurements. **Verification** then tests the calibrated model against another set of data not used in the calibration. This step is not always possible due to the general shortage of data of any sort in stormwater management. Goodness of prediction is done through a simple comparison of the difference in observed and predicted peaks, pollution loads, flood elevations or volumes divided by the observed values and expressed as a percentage, or as simple ratio. Assessing the goodness of fit of a hydrograph is done by calculating the sum of the squares of the difference between observed and predicted values at discreet time steps.

Once the model is prepared for use, attention shifts to efficient **production** methods that minimize the potential for errors while maximizing efficiency. Often "production line"-type efforts are used for large modeling projects. However, constant attention must be paid to ensure the execution of correct procedures, detailed documentation of efforts and input/output data sets, and recognition of anomalies that would invalidate a particular model run.

While it may be enticing to use simple user interfaces and black box approaches that simplify the input and output processes, there is an inherent danger that the modeler will not be aware of errors or problems that these may mask in the modeling process. For example, in hydraulic modeling, shifts from super-critical flow to sub-critical flow happen at sharp break points and are reflected in a jump in water surface elevation. If these changes are not detected, a model may under-predict flow elevation. Numeric instability in mathematical algorithms may give oscillating answers that have nothing to do with reality. Therefore, it is very important to understand the governing equations and principles that form the basis of the model being used. A structured review process must be established to ensure that accurate input values are being used in order to ensure a reasonable output. Labeling of data sets should be systematic and exact.

The consideration of all that is involved in using models can seem to be daunting. However, the complexities involved do not inhibit individuals who understand models and have experience using them. Furthermore, the benefits of using models may provide worthwhile cost-efficiencies in program implementation. So the use of models should not be easily discounted just because of their complexities.

11-D.2. SUMMARY OF COMMONLY USED MODELS

Computer models can be simple, representing only a very few measured or estimated input parameters or can be very complex involving twenty times the number of input parameters. The “right” model is the one that: (1) the user thoroughly understands, (2) gives adequately accurate and clearly displayed answers to the key questions, (3) minimizes time and cost, and (4) uses readily available or collected information. Complex models used to answer simple questions are not an advantage. However, simple models that do not model key necessary physical processes are inadequate and practically useless.

There is no one engineering model or software that addresses all hydrologic, hydraulic and water quality situations. Design needs and troubleshooting for watershed and stormwater management occur on several different scales and can be either system-wide (i.e., watershed) or localized. System-wide issues can occur on both large and small drainage systems, but generally require detailed watershed models and/or design tools. The program(s) chosen to address these issues should handle both major and minor drainage systems. Localized issues also exist on both major and minor drainage systems, but unlike system-wide problems, flood and water quality solution alternatives can usually be developed quickly using simple engineering methods and design tools.

Table 11-D.-1 below lists several widely-used computer programs and modeling packages. The programs have been examined for their applicability to both system-wide and localized issues, the methodologies used for computations, and ease-of-use.

Table 11-D.1. Stormwater Modeling Programs and Design Tools

Model	Major System Modeling	Minor System Modeling	Hydrologic Features	Hydraulic Features	Water Quality Features
Hydrology Software					
HEC-GeoHMS	X		X		
HEC-HMS	X		X		
TR-55			X		
TR-20			X		
PondPack*		X	X	X	
WMS*	X		X		
Watershed Modeling*	X		X		
Hydraulic Software					
HEC-GeoRAS	X			X	
HEC-RAS	X			X	
WSPRO	X			X	
EPA SWMM	X	X	X	X	X
FHWA HY-8 Culvert Analysis		X		X	
CulvertMaster*		X		X	
FlowMaster*		X		X	
Water Quality Software					
VA Runoff Reduction Method		X	X		X
HSPF	X		X		X
BASINS	X		X	X	X
QUAL2E	X			X	X
WASP5	X			X	X
SLAMM*	X		X		X
NOTES: * Proprietary Model					

Source: Adapted from ARC (2001)

For the purposes of this table, major drainage systems are defined as those draining to larger receiving waters. These are typically FEMA-regulated streams, or lakes or reservoirs. Minor drainage systems are smaller natural and man-made systems that drain to the more major streams. Minor drainage systems can have both closed and open-channel components and can include, but are not limited to, neighborhood storm sewers, culverts, ditches, and tributaries. Following the Table, a brief description of each program's capabilities and methodologies is presented.

11-D.2.1. Hydrology Programs

11-D.2.1.1. HEC-GeoHMS: Geospatial Hydrologic Modeling System

HEC-GeoHMS is a user-friendly Windows-based geospatial hydrology toolkit developed by the U.S. Army Corps of Engineers and partners for engineers and hydrologists with limited GIS experience. The program allows users to visualize spatial information, document watershed characteristics, perform spatial analyses, delineate sub-basins and streams, construct inputs to hydrologic models, and assist with report preparation.. HEC-GeoHMS, which interfaces with the ESRI ArcGIS 9.3 software.

Hydrologic modeling has evolved to represent the sub-basin in more detail than the traditional approach, where hydrologic parameters are averaged over large watersheds. With the availability of radar rainfall and spatial data, hydrologic modeling using smaller sub-basin areas or a grid system has introduced a more detailed representation of the watershed. HEC-GeoHMS is designed to meet the needs of both modeling approaches.

HEC-GeoHMS creates background map files, basin model files, meteorologic model files, and a grid cell parameter file that can be used by HEC-HMS to develop a hydrologic model. The basin model file contains hydrologic elements and their hydrologic connectivity. The basin model file includes sub-basin areas and other hydrologic parameters that could be estimated using geospatial data. To assist with estimating hydrologic parameters, HEC-GeoHMS can generate tables containing physical characteristics of streams and watersheds. The grid cell parameter file is required in order to use the ModClark transform method, grid-based precipitation (like radar rainfall), or gridded loss methods.

HEC-GeoHMS allows the user to analyze digital elevation models (DEMs) in a number of coordinate systems and projections. It also allows users to use a more sophisticated technique to impose the stream network and watershed boundaries onto the terrain.

11-D.2.1.2. HEC-HMS: Hydrologic Modeling/Flood Hydrograph System

HEC-HMS replaces HEC-1, which is no longer used. It has more user-friendly input and output processors and graphical capabilities than HEC-1. It is considered by many in the engineering and regulatory communities to be a leading model for major drainage system applications such as Flood Insurance Studies and watershed master.

In the HEC-HMS model, the watershed is represented as an interconnected system of hydrologic (e.g., sub-basins, reservoirs, ponds) and hydraulic (e.g., channels, closed conduits, pumps) components. The model computes a runoff hydrograph for each component, combining two or more hydrographs as it moves downstream in the watershed. The model has a variety of rainfall-runoff simulation methods, including the popular USDA-NRCS (formally SCS) Curve Number methodology. The user can define rainfall events using gage or historical data, or HEC-GeoHMS can generate synthetic storms. Hydrograph generation is performed using the unit hydrograph technique. Clark, NRCS Dimensionless, and Snyder Unit Hydrographs are the available methodologies. Several common channel and storage routing techniques are available as well.

HEC-HMS is not considered a “design tool.” However, there are other hydrologic applications developed within the software that have been used with much success. Multiplan-multiflood analyses allow the user to simulate a number of flood events for different watershed situations (or plans). The dam safety option enables the user to analyze the impact of dam overtopping or structural failure on downstream areas. Flood damage analyses can be used to assess the economic impact of flood damage.

11-D.2.1.3. USDA-NRCS Technical Release 55 (TR-55)

The TR-55 model was originally a DOS-based software package used for estimating runoff hydrographs and peak discharges for small urban watersheds. There is now a MS-Windows based version (WinTR55). The model was developed by the USDA-NRCS and therefore uses NRCS hydrograph methodology to estimate runoff, derived from TR-20 (discussed next). No other methodology is available in the program. Four 24-hour regional rainfall distributions are available for use. Rainfall durations less than 24-hours cannot be simulated. Using detailed input data entered by the user, the WinTR55 model can calculate the area-weighted CN, time of concentration and travel time. Detention pond (i.e., storage) analysis is also available in the WinTR55 model, intended for initial pond sizing. Final design requires a more detailed analysis. TR-55 has become a more robust model that can provide quick estimated answers.

WinTR55 is easy-to-use. Haestad Methods, Inc., included most of the TR-55 capabilities in its PondPack program, described below.

11-D.2.1.4. USDA-NRCS Technical Release 20 (TR-20)

TR-20 was actually the pre-cursor to TR-55 and is more complex. In addition to the outputs generated by TR-55, TR-20 (which has been converted into WinTR20) will also generate storm routings and both the rising and falling curves of hydrographs at specified time intervals. Like WinTR55, WinTR20 is a more robust model now that can also provide quick estimated answers.

11-D.2.1.5. PondPack

PondPack, by Haestad Methods, Inc., is Windows-based software developed for modeling general hydrology and runoff from site development. The program analyzes pre- and post-development watershed conditions and sizes detention ponds. It also computes outlet rating-curves with consideration of tailwater effects, accounts for pond infiltration, calculates detention times and analyzes channels.

Rainfall options are unlimited. The user can model any duration or distribution, for synthetic or real storm events. Several peak discharge and hydrograph computation methods are available, including NRCS, the Rational Method and the Santa Barbara Unit Hydrograph procedure. Infiltration can be considered, and pond and channel routing options are available as well. Like TR-55, PondPack allows the user to calculate hydrologic parameters, such as the time of concentration, within the program.

PondPack has limited, but useful hydraulic features, using Manning's equation to model natural and man-made channels and pipes. A wide variety of detention pond outlet structure configurations can be modeled, including low flow culverts, weirs, riser pipes, and even user-defined structures.

11-D.2.1.6. Watershed Modeling System (WMS)

WMS was developed by the Engineer Computer Graphics Laboratory of Brigham Young University. WMS is a Windows-based user interface that provides a link between terrain models and GIS software, with industry-standard lumped parameter hydrologic models, including HEC-1, TR-55, TR-20 and others. The hydrologic models can be run from the WMS interface. The link between the spatial terrain data and the hydrologic model(s) gives the user the ability to develop hydrologic data that is typically gathered using manual methods from within the program. For example, when using NRCS methodologies, the user can delineate watersheds and sub-basins, determine areas and curve numbers, and calculate the time of concentration at the computer. Typically, these computations are done manually, and are laborious and time-consuming. WMS attempts to use digital spatial data to make these tasks more efficient.

11-D.2.1.7. Watershed Modeling

The Watershed Modeling program was developed to compute runoff and design flood control structures. The program can run inside the MicroStation CAD system. Like WMS, this feature enables the program to delineate and analyze the drainage area of interest. Area, curve number, land use and other hydrologic parameters can be computed and/or catalogued for the user, removing much of the manual calculation typically performed by the hydrologic modeler.

Watershed Modeling contains a variety of methods to calculate flood hydrographs, including NRCS, Snyder and Rational methods. Rainfall can be synthetic or user-defined, with any duration and return period. Rainfall maps for the entire U.S. are provide to help the user calculate IDF relationships. Several techniques are available for channel and storage routing. The user also has a wide variety of outlet structure options for detention pond analysis and design.

11-D.2.2. Hydraulics Programs

11-D.2.2.1. HEC-GeoRAS: Geospatial River Analysis System

HEC-GeoRAS creates a file of geometric data for import into HEC-RAS and enables viewing of exported results from RAS. The import file is created from data extracted from ArcGIS layers and from a digital terrain model (DTM). HEC-GeoRAS requires a DTM represented by a

triangulated irregular network (TIN) or a GRID. The layers and the DTM are referred to collectively as the *RAS Layers*. Geometric data are developed based on the intersection of the RAS Layers.

Prior to performing hydraulic computations in HEC-RAS, the geometric data must be imported and completed, and flow data must be entered. Once the hydraulic computations are performed, exported water surface and velocity results from HEC-RAS may be imported back to the GIS using HEC-GeoRAS for spatial analysis. GIS data is transferred between HEC-RAS and ArcGIS using a specifically formatted GIS exchange file.

11-D.2.2.2. HEC-RAS: River Analysis System

HEC-RAS is a Windows-based hydraulic model developed by the Corps of Engineers to replace the popular, DOS-based HEC-2 model. RAS has the ability to import and convert HEC-2 input files and expounds upon the capabilities of HEC-2. Since its introduction several years ago, the user-friendly HEC-RAS has become known as an excellent model for simulation of major systems (i.e., open channel flow) and has become the chief model for calculating floodplain elevations and determining floodway encroachments for Flood Insurance Studies. Like HEC-2, HEC-RAS has been accepted for FIS analysis by the FEMA. However, HEC-RAS is a much easier model to use than HEC-2 as it has an extremely useful interface that provides the immediate capability to view model input and output data in graphical, tabular, and report formats.

HEC-RAS performs one-dimensional analyses for steady, unsteady, and mixed flow water surface profiles, using the energy equation. Energy losses are calculated using Manning's equation. Contraction and expansion changes in the specific energy are considered around bridges, culverts, etc. Rapidly varied flow (e.g., hydraulic jumps) is modeled using the momentum equation. The effects of in-stream structures (e.g., bridges, culverts, weirs and floodplain obstructions) and in-stream changes (e.g., levees and channel improvements) can be simulated. The model allows the user to define the geometry of the channel or structure to the level of detail required by the application. One popular and useful feature of the HEC-RAS model is the capability to easily facilitate floodway encroachment analysis. Five encroachment methods are available to the user.

HEC-RAS4 provides the ability to conduct steady, unsteady, and mixed flow analyses. RAS4 includes sediment transport analysis with choices for the analyzing using surface or substrate bed sediments and simulating up to 5 layers within the channel bed. There are 5 choices of computation including those better suited to cohesives, non-cohesives, predominantly sand and gravel bedload, and predominantly suspended sediment transport. There is an analysis option that will allow the user to use a range of sediment transport equations within a single simulation to be sure that the different grain sizes are treated appropriately. *RAS4 also includes water quality simulations.* Linked with HEC-GeoRAS, the HEC-RAS model provides the capability to import GIS data for channel geometry and export HEC-RAS output for floodplain and floodway delineation.

11-D.2.2.3. WSPRO

WSPRO was developed by the USGS to compute water surface profiles for one-dimensional, gradually varied, steady flow. Like HEC-RAS, WSPRO can develop profiles in subcritical, critical and supercritical flow regimes. WSPRO is designated HY-7 in the Federal Highway Administration (FHWA) computer program series and its original objective was analysis and design of bridge openings and embankment configurations. Since then, the model has been expanded to model open channels and culverts.

Open channel computations use standard step-backwater techniques. Flow through bridges is simulated using an energy-balancing technique that uses a coefficient of discharge and estimates an effective flow length. Pressure flow under bridges is simulated using orifice-type flow equations developed by the FHWA. Culvert flow is simulated using FHWA techniques for inlet control and energy balance for outlet control.

WSPRO is considered a fairly easy-to-use DOS-based model applicable to water surface profile analysis for highway design, flood insurance studies, and establishing stage-discharge relationships. However, the original form of the model is not Windows-based and therefore does not have the useful editing and graphical features found in HEC-RAS, nor does it do anything that HEC-RAS doesn't do. Like HEC-RAS, a third party software developer (the Scientific Software Group) has designed SMS (Surface Water Modeling Software) to support both pre- and post-processing of WSPRO data.

11-D.2.2.4. EPA-Storm Water Management Model (SWMM)

EPA-SWMM was developed by the Environmental Protection Agency (EPA) to analyze storm water quantity and quality problems associated with runoff from urban areas. For many years EPA SWMM has been the model of choice for simulation of minor drainage systems primarily composed of closed conduits. The model can simulate both single-event and continuous events and has the capability to model both wet and dry weather flow. The basic output from SWMM consists of runoff hydrographs, pollutographs, storage volumes and flow stages and depths.

SWMM's hydraulic computations are link-node based, and are performed in separate modules, called blocks. The EXTRAN computational block solves complete dynamic flow routing equations to simulate backwater, looped pipe connections, manhole surcharging and pressure flow. SWMM is the most comprehensive model with respect to its capabilities to simulate urban storm flow, and many cities have used it successfully for storm water, sanitary, or combined sewer system modeling. Open channel flow can be simulated using the TRANSPORT block, which solves the kinematic wave equations for natural channel cross-sections.

Although represented here as a hydraulic model, SWMM has both hydrologic and water quality components. Hydrologic processes are simulated using the RUNOFF block, which computes the quantity and quality of runoff from drainage areas and routes the flow to the major sewer system lines. Pollutant transport is simulated in tandem with hydrologic and hydraulic computations, which calculate pollutant buildup and washoff from land surfaces and pollutant routing, scour and in-conduit suspension in flow conduits and channels.

EPA SWMM is a public domain, DOS-based model. For large watersheds with extensive pipe networks, input and output processing can be tedious and confusing. Because of the popularity of the model, third-party commercial enhancements to SWMM have become more common, making the model a strong choice for minor system drainage modeling. Examples of commercially enhanced versions of EPA SWMM include MIKE-SWMM, distributed by BOSS International, XPSWMM by XP-Software, and PCSWMM by Computational Hydraulics Inc (CHI). CHI also developed PCSWMM-GIS, which ties the SWMM model to a GIS platform.

11-D.2.2.5. FHWA HY-8 Culvert Analysis

HY-8 is a computerized implementation of FHWA culvert hydraulic approaches and protocols. The FHWA has been producing computerized culvert hydraulic software since the early 1960's (with the HY-1 program). HY-8 Culvert Analysis automates the design methods described in FHWA publications HDS-5, "Hydraulic Design of Highway Culverts," HEC-14, "Hydraulic Design of Energy Dissipators for Culverts and Channels," and HEC-19, "Hydrology." The FHWA released the initial DOS-based version of the HY-8 program in the early 1980's. FHWA released the original Windows version (7.0) in March 2007 and the latest phase update (7.2) in August 2009). The HY-8 program has successfully operated on all current "flavors" of the Windows operating system. The HY-8 program is available at no charge to the hydraulic and transportation communities.

11-D.2.2.6. CulvertMaster

CulvertMaster, developed by Haestad Methods, Inc., is an easy-to-use, Windows-based culvert simulation and design program. The program can analyze pressure or free surface flow conditions and subcritical, critical and supercritical flow conditions, based on drawdown and backwater. A variety of common culvert shapes and section types are available. Tailwater effects are considered and the user can enter a constant tailwater elevation, a rating curve, or specify an outlet channel section. Culvert hydraulics are solved using FHWA methodology for inlet and outlet control computations. Roadway and weir overtopping are checked in the solution of the culvert.

CulvertMaster also has a hydrologic analysis component to determine peak flow using the Rational Method or the SCS Graphical Peak Method. The user also has the option of entering a known peak flow rate. The user must enter all rainfall and runoff information (e.g., IDF data, rainfall depths, curve numbers, C coefficients, etc).

11-D.2.2.7. FlowMaster

FlowMaster, also developed by Haestad Methods, Inc., is a Windows-based hydraulic pipe and channel design program. The user enters known information on the channel section or pipe, and allows the program to solve for the unknown parameter(s), such as diameter, depth, slope, roughness, capacity, velocity, etc. Solution methods include Manning's equation, the Darcy-Weisbach formula, Hazen-Williams formula, and Kutter's Formula. The program also features calculations for weirs, orifices, gutter flow, ditch and median flow and discharge into curb, grated, and slot inlets.

11-D.2.3. Water Quality Programs

11-D.2.3.1. Virginia Runoff Reduction Method

The Virginia Runoff Reduction Method (RRM) is a compliance tool developed for DEQ by the Center for Watershed Protection. The RRM is based in a Microsoft Excel spreadsheet format. It is quick and easy to use, allowing the user to enter basic development site cover and area data to compute a runoff volume and phosphorus load from the site after development. Then the user chooses various combinations of BMPs to provide a phosphorus reduction necessary to meet the discharge load limit criteria in the Virginia Stormwater Management Regulations (9 VAC 25-870-63).

The methodology accounts for treatment trains (i.e., BMPs arranged in sequence) and generates a modified CN based on the site conditions and BMPs selected. A detailed discussion of the RRM is provided in **Chapter 12** of this Handbook.

11-D.2.3.2. Hydrologic Simulation Program FORTRAN (HSPF)

The HSPF model was developed by the EPA for the continuous or single-event simulation of runoff quantity and quality from a watershed. The original model was developed from the Stanford Watershed Model, which simulated runoff quantity only. It was expanded to include quality components, and has since become a popular model for continuous non-point source water quality simulations. Non-point source conventional and toxic organic pollutants from urban and agricultural land uses can be simulated, on pervious and impervious land surfaces and in streams and well-mixed impoundments. The various hydrologic processes are represented mathematically as flows and storages. The watershed is divided into land segments, channel reaches and reservoirs. Water, sediment and pollutants leaving a land segment move laterally to a downstream land segment, a stream or river reach, or reservoir. Infiltration is considered for pervious land segments.

HSPF model output includes time series information for water quality and quantity, flow rates, sediment loads, and nutrient and pesticide concentrations. To manage the large amounts of data associated with the model, HSPF includes a database management system. To date, HSPF is still a DOS-based model and therefore does not have the useful graphical and editing options of a Windows-based program. Input data requirements for the model are extensive and the model takes some time to learn. Users link HSPF to the BASINS model (discussed below); together they provide robust advantages. The EPA continues to expand and develop HSPF, and still recommends it for the continuous simulation of hydrology and water quality in watersheds.

11-D.2.3.3. Better Assessment Science Integrating Point and Nonpoint Sources (BASINS)

The BASINS watershed analysis system was developed by the EPA for use by regional, state and local pollution control agencies to analyze water quality on a watershed-wide basis. BASINS databases, assessment tools and models integrate directly with the ArcView GIS environment, national databases containing watershed data, and modeling programs and water quality assessment tools into one stand-alone program. The program, which has a use-friendly graphical

interface, will analyze both point and non-point sources and supports the development of total maximum daily loads (TMDLs). The assessment tools and models utilized in BASINS include TARGET, ASSESS, Data Mining, HSPF, TOXIRoute and QUAL2E.

11-D.2.3.4. QUAL2EU: Enhanced Stream Water Quality Model

QUAL2EU was developed by the EPA and intended for use as a water quality planning tool. The model actually consists of four modules:

- QUAL2E, the original water quality model;
- QUAL2EU, the water quality model with uncertainty analysis;
- A pre-processing module; and
- A post-processing module.

QUAL2EU simulates steady state or dynamic conditions in branching streams and well-mixed lakes, and can evaluate the impact of waste loads on water quality. It also can enhance a field sampling program by helping to identify the magnitude and quality characteristics of non-point waste loads. Up to 15 water quality constituents can be modeled. Dynamic simulation allows the user to study the effects of diurnal variations in water quality (primarily DO and temperature). The steady state option allows the user to perform uncertainty analyses.

QUAL2EU is a DOS-based program, and the user will require some length of time to develop a QUAL2EU model, mainly due to the complexity of the model and data requirements for a simulation. However, to ease user interaction with the model an interactive pre-processor (AQUAL2) has been developed to help the user build input data files. A post-processor (Q2PLOT) also exists to display model output in textual or graphical formats.

11-D.2.3.5. Water Quality Analysis Simulation Program (WASP5)

The WASP5 model was developed by the EPA to simulate contaminant fate in surface waters. Both chemical and toxic pollution can be simulated in one, two, or three dimensions. Problems studied using WASP5 include biochemical oxygen demand and dissolved oxygen dynamics, nutrients and eutrophication, bacterial contamination, and organic chemical and heavy metal contamination. WASP5 has an associated stand-alone hydrodynamic model, called DYNHYD5, that simulates variable tidal cycles, wind and unsteady flows. DYNHYD4 supplies flows and volumes to the water quality model. The model is DOS-based. However, WASP packages can be obtained from outside vendors that include interactive tabular and graphical pre- and post-processors.

11-D.2.3.6. Source Loading and Management Model (SLAMM)

The SLAMM model was originally developed as a planning tool to model runoff water quality changes resulting from urban runoff pollutants. The model has been expanded to include simulation of common water quality best management practices such as infiltration BMPs, wet detention ponds, porous pavement, street cleaning, catch basin cleaning and grass swales. Unlike other water quality models, SLAMM focuses on small storm hydrology and pollutant washoff,

which is a large contributor to urban stream water quality problems. SLAMM computations are based on field observations, as opposed to theoretical processes. SLAMM can be used in conjunction with more commonly used hydrologic models to predict pollutant sources and flows.

11-D.3. REFERENCES

Atlanta Regional Commission (ARC). 2001. *Georgia Stormwater Management Manual*. Prepared by AMEC, the Center for Watershed Protection, Debo and Associates, Jordan Jones and Goulding, and the Atlanta Regional Commission. Atlanta, Georgia.

Appendix 11-E

Filter and Drainage Diaphragm Design

- **USDA-NRCS Soil Mechanics Note No. 1: “Guide for Determining the Gradation of Sand and Gravel Filters,”** incorporated into the National Engineering Handbook, Part 633 Soil Engineering. This can be found on the NRCS eDirectives website; the direct link is <http://directives.sc.egov.usda.gov/viewerFS.aspx?hid=21424>
- **USDA-NRCS Soil Mechanics Note No. 3: “Soil Mechanics Considerations for Embankment Drains,”** This can be found on the NRCS eDirectives website; the direct link is <http://directives.sc.egov.usda.gov/viewerFS.aspx?hid=19994>