


STD & SPEC 3.17

**STORMWATER CONVEYANCE
CHANNEL****Definition**

A permanent, designed waterway, shaped, sized, and lined with appropriate vegetation or structural material used to safely convey stormwater runoff within or away from a developing area.

Purpose

To provide for the conveyance of concentrated surface runoff water to a receiving channel or system without damage from erosion.



Conditions Where Practice Applies

Generally applicable to man-made channels, including roadside ditches and intermittent natural channels, that are constructed or are modified to accommodate flows generated by land development. The implementation of this control should come only after a channel adequacy analysis for capacity and velocity has been performed as per methods noted in Chapter 5, Engineering Calculations. The measure should be installed and stabilized prior to the introduction of post-development flows. This practice is not generally applicable to continuous flowing natural streams. Major streams need full design considerations and calculations. Provisions for protecting the banks of such streams are described in VEGETATIVE STREAMBANK STABILIZATION, Std. & Spec. 3.22 and STRUCTURAL STREAMBANK STABILIZATION, Std. & Spec. 3.23.

Planning Considerations

The design of a channel cross-section and lining is based primarily upon the volume and velocity of flow expected in the channel. If conditions are appropriate, grass or riprap channels are preferred over concrete. While concrete channels are efficient and easy to maintain, they remove runoff so quickly that channel erosion and flooding often result downstream. Grass or riprap channels reduce this problem by more closely duplicating a natural system.

Besides the primary design considerations of capacity and velocity, a number of other important factors should be taken into account when selecting a cross-section and lining. These factors include land availability, compatibility with land use and surrounding environment, safety, maintenance requirements, outlet conditions, and soil erodibility factor. If the riprap design is chosen, filter fabric must be used to act as a separator and stabilizer between the stone and the earth.

Cross-section design:

Vee-shaped ditches are generally used where the quantity of water to be handled is relatively small, such as roadside ditches. A grass or sod lining will suffice where velocities in the ditch are low. For steeper slopes where high velocities are encountered, a riprap, concrete or bituminous concrete lining may be appropriate.

Parabolic channels are often used where the quantity of water to be handled is larger and where space is available for a wide, shallow channel with low velocity flow. Riprap should be used where higher velocities are expected and where some dissipation of energy (velocity) is desired. Combinations of grass and riprap are also useful where there is a continuous low flow in the channel.

Trapezoidal channels are often used where the quantity of water to be carried is large and conditions require that it be carried at a relatively high velocity. Trapezoidal ditches are generally lined with concrete or riprap.

Plates 3.17-1 and 3.17-2 illustrate the various types of cross-sections and channel linings.

Outlet design:

Outlet conditions for all channels must be considered. This is particularly important for the transition from a man-made lining, such as concrete and riprap, to a vegetated or non-vegetated lining. Appropriate measures must be taken to dissipate the energy of the flow to prevent scour of the receiving channel. (See OUTLET PROTECTION, Std. & Spec. 3.18).

Capacity

All channels shall be designed in a manner which satisfies MS #19 of the Virginia Erosion and Sediment Control Regulations. If channel modifications are necessary, the capacity of the channel must be sufficient to convey the 10-year frequency design storm (24-hour duration) without overtopping the banks. If pre-development flooding problems exist, the consequences of flooding are severe, or drainage systems which convey larger storms converge with the channel in question, consideration should be given to increasing the capacity beyond the 10-year frequency storm capacity.

Velocity


Channels should be designed so that the velocity of flow expected from a 2-year frequency storm shall not exceed the permissible velocity for the type of lining used.

While concrete-lined channels can usually be smaller than grass-lined channels, the increased velocity will produce more erosion and flooding downstream. Chapter 5 contains information on engineering calculations for channel design. The VDOT Drainage Manual may be referenced for additional information on channel and culvert design.


Grass-lined channels provide good protection against erosion, while they provide an aesthetic setting for conveyance of runoff. However, the velocities that grass linings can handle are much lower than those which can be withstood by riprap or concrete-lined channels. For grass linings, the type of vegetation chosen shall be appropriate for the site conditions: i.e., drainage tolerance, shade tolerance, maintenance requirements, etc. (See PERMANENT SEEDING, Std. & Spec. 3.32 and SODDING, Std. & Spec. 3.33). Where there will be a base flow in grass-lined channels, a stone center, a subsurface drain, or other suitable means to handle the base flow shall be provided. Plate 3.17-2 shows typical cross-sections for stone center channels. Refer to RIPRAP, Std. & Spec. 3.19 to choose the correct stone size and for filter fabric specifications. Permissible velocities for grass-lined channels are shown in Table 3.17-A.

TYPICAL WATERWAY CROSS-SECTIONS

COMPACTED SOIL

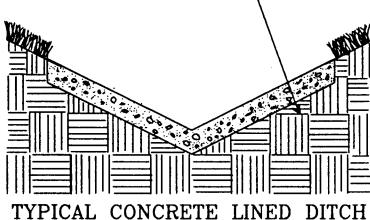


TYPICAL CONCRETE LINED DITCH




TYPICAL GRASS LINED DITCH

TYPICAL VEE CROSS-SECTIONS

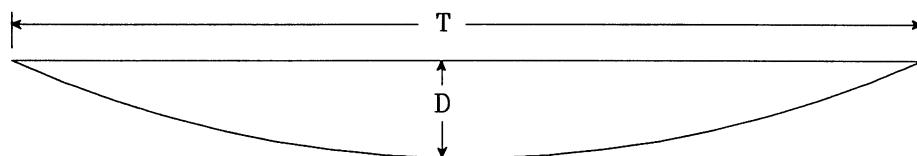

PARABOLIC WATERWAY CROSS-SECTION

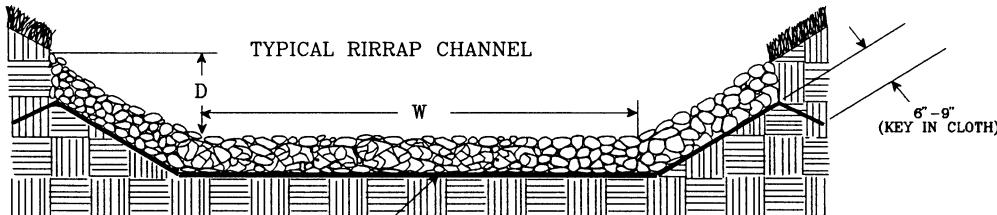


TYPICAL RIPRAP CHANNEL
FILTER CLOTH
NOTE: ALTHOUGH FILTER CLOTH IS
PREFERRED, A GRANULAR FILTER MAY BE SUBSTITUTED FOR
FILTER CLOTH. (FOR PHYSICAL REQUIREMENTS, SEE STD. &
SPEC. 3.19, RIPRAP)

TYPICAL CONCRETE CHANNEL

EXPANSION JOINT
(90' SPACING)


NOT TO SCALE

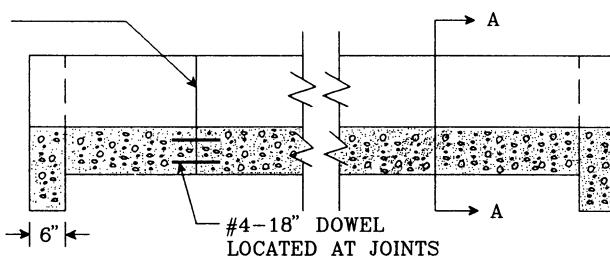

#4-18" DOWEL
LOCATED AT JOINTS

18"


6X6 WELDED WIRE FABRIC
AS REQUIRED

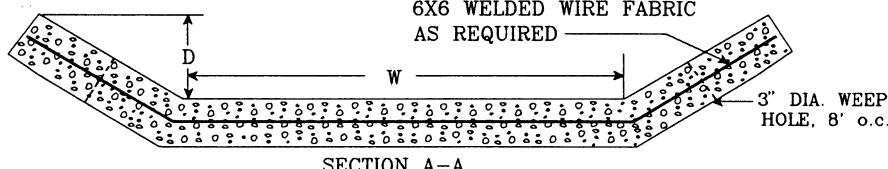

SECTION A-A


TRAPEZOIDAL WATERWAY CROSS-SECTIONS

STONE-LINED WATERWAYS

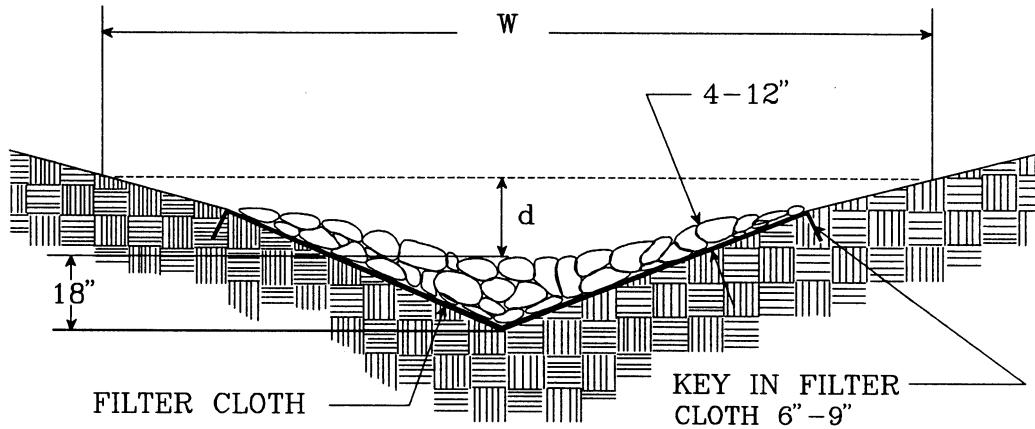

V-SHAPED WATERWAY WITH STONE CENTER DRAIN

NOTE: A GRANULAR FILTER MAY BE SUBSTITUTED FOR FILTER CLOTH.

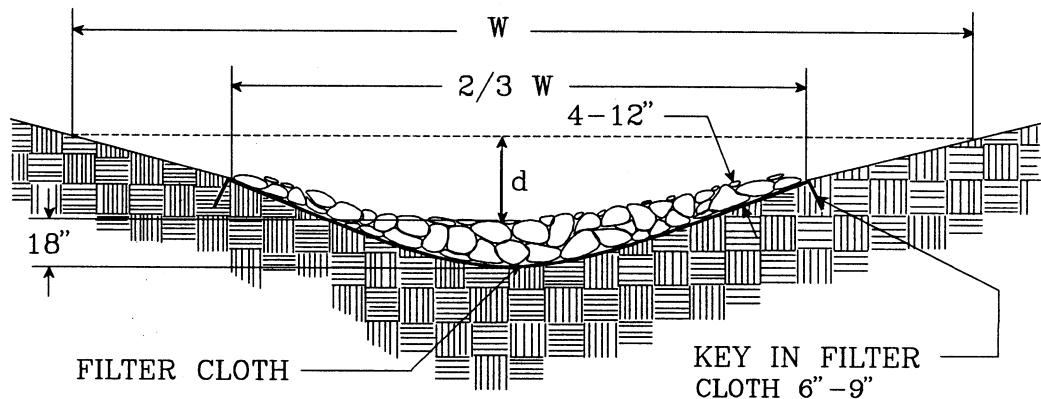

PARABOLIC WATERWAY WITH STONE CENTER DRAIN

NOTE: A GRANULAR FILTER MAY BE SUBSTITUTED FOR FILTER CLOTH.

TABLE 3.17-A
PERMISSIBLE VELOCITIES FOR GRASS-LINED CHANNELS

CHANNEL SLOPE	LINING	PERMISSIBLE VELOCITY*
0 - 5%	Bermudagrass	6 ft./second
	Reed canarygrass Tall fescue Kentucky bluegrass	5 ft./second
	Grass-legume mixture	4 ft./second
	Red fescue Redtop Sericea lespedeza Annual lespedeza Small grains (temporary)	2.5 ft./second
5 - 10%	Bermudagrass	5 ft./second
	Reed canarygrass Tall fescue Kentucky bluegrass	4 ft./second
	Grass-legume mixture	3 ft./second
Greater than 10%	Bermudagrass	4 ft./second
	Reed canarygrass Tall fescue Kentucky bluegrass	3 ft./second

* For highly erodible soils, permissible velocities should be decreased by 25%. An erodibility factor (K) greater than 0.35 would indicate a highly erodible soil. Erodibility factors (K-factors) for many Virginia soils are listed in Chapter 6.

Source: Soil and Water Conservation Engineering, Schwab, et.al.

Riprap-lined channels can be designed to withstand most flow velocities by choosing a stable stone size. The procedures for selecting a stable stone size for channels and installation is contained in Std. & Spec. 3.19, RIPRAP. All riprap must be installed with a filter fabric or gravel (granular) underlining. Transition from a riprap lining to grass and earth linings must be carefully designed to meet the allowable velocities of each type of lining.

Concrete-lined channels are not usually limited in the velocity they can carry; however, it should be kept in mind that the flow velocity at the outlet of the paved section must not exceed the permissible velocity of the receiving channel. See OUTLET PROTECTION, Std. & Spec. 3.18. Concrete channels shall be at least 4 inches thick and meet all applicable VDOT criteria found in its Road and Bridge Standards and Road and Bridge Specifications.

Depth

The design water surface elevation of a channel receiving water from diversions or other tributary channels shall be equal to or less than the design water surface elevation of the diversion or other tributary channel at the point of intersection.

The top width of parabolic and vee-shaped, grass-lined channels shall not exceed 30 feet, and the bottom width of trapezoidal, grass-lined channels shall not exceed 15 feet unless multiple or divided waterways, riprap center, or other means are provided to control meandering of low flows.

Outlet

The outlets of all channels shall be protected from erosion (see OUTLET PROTECTION, Std. & Spec. 3.18).

Calculations

1. Peak runoff shall be calculated in accordance with the guidelines contained in Chapter 5.
2. Channel dimensions for roadside ditches and median channels shall be determined in accordance with applicable design procedures outlined in the latest edition of the VDOT Drainage Manual. Helpful design charts are also included in that publication to aid in the design of concrete-lined channels for many cross-sectional shapes.
3. Channel dimensions for parabolic, grass-lined channels may be determined from the tables in Appendix 3.19-a.
4. A general "trial and error" procedure for designing channels using Manning's Equation and the Continuity Equation is contained in Chapter 5 of this handbook.
5. There are various computer programs available to assist a designer in performing these calculations.

Construction Specifications

General

1. All trees, brush, stumps, roots, obstructions and other unsuitable material shall be removed and disposed of properly.
2. The channel shall be excavated or shaped to the proper grade and cross-section.
3. Any fills shall be well compacted to prevent unequal settlement.
4. Any excess soil shall be removed and disposed of properly.

Grass-lined Channels

The method used to establish grass in the ditch or channel will depend upon the severity of the conditions encountered. The methods available for grass establishment are set forth in PERMANENT SEEDINGS, Std. & Spec. 3.32 and SODDING, Std. & Spec. 3.33.

Riprap-lined Channels

Riprap shall be installed in accordance with RIPRAP, Std. & Spec. 3.19.

Concrete-lined Channels

Concrete-lined channels must be constructed in accordance with all applicable VDOT specifications. The following items highlight those specifications:

1. The subgrade should be moist at the time the concrete is poured.
2. Traverse joints for crack control should be provided at approximately 20-foot intervals and when more than 45 minutes elapses between the times of consecutive concrete placements. All sections should be at least 6 feet long. Crack control joints may be formed by using a 1/8-inch thick removable template, by scoring or sawing to a depth of at least 3/4 inch or by an approved "leave in"-type insert.
3. Expansion joints shall be installed every 100 feet.

Maintenance

Grass-lined Channels

During the initial establishment, grass-lined channels should be repaired immediately and grass re-established if necessary. After grass has become established, the channel should be checked periodically to determine if the grass is withstanding flow velocities without

damage. If the channel is to be mowed, it should be done in a manner that will not damage the grass.

Riprap-lined Channels

Riprap-lined channels should be checked periodically to ensure that scour is not occurring beneath fabric underlining of the riprap layer. The channel should also be checked to determine that the stones are not dislodged by large flows.

Concrete-lined Channels

Concrete-lined channels should be checked periodically to ensure that there is no undermining of the channel. Particular attention should be paid to the outlet of the channel. If scour is occurring at the outlet, appropriate outlet protection shall be installed. See OUTLET PROTECTION, Std. & Spec. 3.18.

Sediment Deposition

If the channel is below a high sediment-producing area, sediment should be trapped before it enters the channel. Field experience has demonstrated that many newly constructed conveyance channels become damaged and require costly repairs as a result of improper upslope controls. If sediment is deposited in a grass-lined channel, it should be removed promptly to prevent damage to the grass. Sediment deposited in riprap and concrete-lined channels should be removed when it reduces the capacity of the channel.

APPENDIX 3.17-a

DESIGN OF PARABOLIC GRASS-LINED CHANNELS

The channel must be designed for capacity and erosion resistance. Capacity will be a minimum when the grass is long and unmowed. This condition corresponds to V_2 in Table 3.17-B. Erosion will be most likely to occur when the grass is short. This condition will correspond to V_1 in Table 3.17-B. A design based upon Table 3.17-B will result in a channel which will have adequate capacity when the vegetation in the channel is long and thick, which will remain stable when the vegetation is short or recently mowed, and which will have adequate freeboard for the design flow.

Use the following procedure to design a grass-lined parabolic channel based upon Tables 3.17-A and 3.17-B:

1. Determine the required channel capacity, Q. (Peak rate of runoff for the selected design storm).
2. Select an appropriate grass lining and note the maximum permissible velocity (V_1) from Table 3.17-A.
3. Choose the appropriate sheet of Table 3.17-B for the channel slope. Using the maximum permissible velocity (V_1) and the required flow capacity (Q), read the top width (T) and the depth (D) for the correct parabolic section.

Example Problem

Design a parabolic waterway to be lined with Kentucky 31-Tall Fescue which will carry 50 cfs on a 3% slope.

Solution:

1. $Q = 50 \text{ cfs}$ (given)
2. $V_1 = 5 \text{ ft./sec.}$ for Kentucky 31-Tall Fescue (from Table 3.17-A)
3. From sheet 9 of Table 3.17-B (for 3% slope): Read the top width (T) and depth (D) for $Q = 50 \text{ cfs}$ and $V_1 = 5.0 \text{ fps}$

$$T = 16.3 \text{ feet}$$

$$D = 1.45 \text{ feet}$$

**TABLE 3.17-B
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS**

Q cfs	V ₁ for RETARDANCE "D". Top Width (T), Depth (D) and V ₂ for RETARDANCE "D".						Grade 0.25 Percent					
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂
15												
20	11.3	3.27	1.00	11.3	3.09	1.09	11.3	2.99	1.15	12.1	3.61	1.36
25	13.2	3.09	1.01	13.2	2.99	1.13	13.2	2.94	1.18	13.4	3.49	1.42
30	15.2	3.01	1.13	15.2	2.99	1.15	15.2	2.93	1.18	14.7	3.41	1.48
35	17.3	2.99	1.15	17.3	2.94	1.18	17.3	2.92	1.19	16.1	3.38	1.50
40	19.3	2.94	1.18	19.3	2.93	1.18	19.3	2.92	1.19	16.1	3.35	1.52
45	21.4	2.93	1.18	21.4	2.92	1.19	21.4	2.92	1.19	16.1	3.35	1.52
50	23.5	2.92	1.19	23.5	2.92	1.19	23.5	2.91	1.21	17.5	3.35	1.52
55	25.5	2.89	1.21	25.5	2.89	1.21	25.5	2.88	1.21	18.8	3.30	1.56
60	27.6	2.89	1.21	27.6	2.89	1.21	27.6	2.88	1.21	20.2	3.28	1.64
65	29.7	2.89	1.21	29.7	2.89	1.21	29.7	2.87	1.21	21.6	3.27	1.58
70	31.7	2.87	1.23	31.7	2.87	1.23	31.7	2.86	1.23	21.6	3.27	1.58
75	33.8	2.87	1.23	33.8	2.87	1.23	33.8	2.86	1.23	23.0	3.26	1.58
80	38.0	2.87	1.23	38.0	2.87	1.23	38.0	2.87	1.23	23.0	3.26	1.58
90	42.1	2.85	1.24	42.1	2.85	1.24	42.1	2.85	1.24	23.5	3.25	1.60
100	46.3	2.85	1.24	46.3	2.85	1.24	46.3	2.85	1.24	24.6	3.24	1.62
110	50.4	2.84	1.25	50.4	2.84	1.25	50.4	2.84	1.25	34.1	3.20	1.64
120	54.6	2.85	1.24	54.6	2.85	1.24	54.6	2.85	1.24	36.9	3.19	1.64
140	58.7	2.84	1.25	58.7	2.84	1.25	58.7	2.84	1.25	39.7	3.19	1.65
150	62.9	2.85	1.25	62.9	2.85	1.25	62.9	2.85	1.25	42.5	3.19	1.65
160	67.0	2.84	1.25	67.0	2.84	1.25	67.0	2.84	1.25	45.3	3.18	1.65
170	71.1	2.84	1.26	71.1	2.84	1.26	71.1	2.84	1.26	48.1	3.18	1.65
180	75.3	2.84	1.25	75.3	2.84	1.25	75.3	2.84	1.25	50.9	3.18	1.66
190	79.4	2.84	1.26	79.4	2.84	1.26	79.4	2.84	1.26	53.7	3.18	1.66
200	83.5	2.84	1.26	83.5	2.84	1.26	83.5	2.84	1.26	56.5	3.18	1.66
220	91.8	2.84	1.26	91.8	2.84	1.26	91.8	2.84	1.26	62.1	3.18	1.66
240	100.0	2.83	1.26	100.0	2.83	1.26	100.0	2.83	1.26	67.6	3.17	1.67
260	108.3	2.84	1.26	108.3	2.84	1.26	108.3	2.84	1.26	73.2	3.17	1.67
280	116.6	2.84	1.26	116.6	2.84	1.26	116.6	2.84	1.26	78.8	3.17	1.67
300	124.8	2.84	1.26	124.8	2.84	1.26	124.8	2.84	1.26	84.4	3.17	1.67

Source: USDA-SCS

Sheet 1 of 14

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

v₁ for RETARDANCE "D". Top Width ("T"), Depth ("D") and *v₂* for RETARDANCE "B".

Grade 0.50 Percent

Q cfs	<i>v₁</i> = 2.0		<i>v₁</i> = 2.5		<i>v₁</i> = 3.0		<i>v₁</i> = 3.5		<i>v₁</i> = 4.0		<i>v₁</i> = 4.5		<i>v₁</i> = 5.0		<i>v₁</i> = 5.5		<i>v₁</i> = 6.0		
	T	D	<i>v₂</i>	T	D	<i>v₂</i>	T	D	<i>v₂</i>	T	D	<i>v₂</i>	T	D	<i>v₂</i>	T	D	<i>v₂</i>	
15	10.2	2.28	0.95																
20	13.3	2.18	1.02																
25	16.5	2.15	1.05	10.5	2.60	1.35													
30	19.7	2.12	1.06	12.4	2.51	1.42	9.5	2.91	1.60										
40	26.0	2.08	1.09	14.3	2.45	1.48	10.9	2.81	1.69										
45	29.2	2.08	1.10	16.3	2.44	1.49	12.3	2.74	1.76										
50	32.4	2.08	1.10	18.2	2.41	1.52	13.7	2.69	1.81										
55	35.6	2.08	1.11	20.2	2.40	1.53	15.1	2.64	1.86	11.1	3.22	2.07							
60	38.8	2.08	1.11	22.1	2.38	1.55	16.6	2.64	1.86	12.0	3.11	2.18							
65	42.0	2.08	1.11	24.1	2.38	1.55	18.0	2.61	1.90	13.0	3.07	2.23							
70	45.2	2.08	1.11	28.0	2.36	1.57	19.5	2.61	1.89	14.0	3.03	2.27							
75	48.4	2.08	1.11	29.9	2.35	1.59	22.4	2.59	1.92	15.0	3.01	2.31							
80	51.6	2.08	1.11	31.9	2.36	1.58	23.8	2.58	1.94	17.0	2.96	2.36	13.4	3.41	2.60				
90	57.9	2.07	1.12	35.8	2.35	1.59	26.7	2.56	1.96	19.1	2.95	2.37	2.64	16.5	3.31	2.77	13.3	3.77	2.96
100	64.3	2.07	1.11	39.7	2.34	1.60	29.6	2.55	1.97	21.1	2.92	2.42	16.5	3.31	2.75	14.5	3.70	3.05	
110	70.7	2.08	1.11	43.6	2.34	1.61	32.6	2.56	1.96	23.2	2.92	2.42	18.1	3.29	2.75	14.5	3.70	3.05	
120	77.0	2.07	1.12	47.5	2.33	1.61	35.5	2.56	1.97	25.2	2.89	2.45	19.6	3.24	2.81	15.7	3.64	3.12	
130	83.4	2.08	1.12	51.5	2.34	1.61	38.4	2.55	1.98	27.3	2.90	2.45	21.2	3.23	2.82	16.9	3.60	3.18	
140	89.7	2.08	1.12	55.4	2.34	1.61	41.3	2.55	1.98	29.3	2.88	2.47	22.8	3.22	2.84	18.1	3.56	3.23	
150	96.0	2.08	1.12	59.3	2.34	1.61	44.2	2.55	1.99	31.4	2.88	2.47	24.3	3.19	2.88	19.4	3.56	3.23	
160	102.3	2.08	1.12	63.2	2.34	1.61	47.1	2.54	1.99	33.5	2.89	2.47	25.9	3.19	2.88	20.6	3.53	3.27	
170	108.6	2.08	1.12	67.1	2.34	1.62	50.0	2.54	1.99	35.5	2.87	2.48	27.5	3.19	2.89	21.9	3.54	3.27	
180	114.9	2.08	1.12	70.9	2.33	1.62	52.9	2.54	1.99	37.6	2.88	2.48	29.1	3.19	2.89	23.1	3.51	3.30	
190	121.2	2.08	1.12	74.8	2.33	1.62	55.8	2.54	2.00	39.6	2.87	2.49	30.6	3.16	2.92	24.3	3.49	3.36	
200	127.4	2.08	1.13	78.7	2.33	1.62	58.7	2.54	2.00	41.7	2.87	2.49	32.2	3.16	2.93	25.6	3.50	3.33	
220	140.0	2.08	1.13	86.5	2.33	1.62	64.5	2.54	2.00	45.8	2.87	2.50	35.4	3.16	2.93	28.1	3.49	3.35	
240	152.6	2.08	1.13	94.3	2.33	1.63	70.3	2.54	2.01	49.9	2.86	2.51	38.6	3.16	2.93	30.6	3.48	3.36	
260	165.2	2.08	1.13	102.1	2.33	1.63	76.1	2.54	2.01	54.0	2.86	2.51	41.7	3.15	2.95	33.1	3.47	3.38	
280	177.7	2.08	1.13	109.8	2.33	1.63	81.9	2.54	2.01	58.2	2.87	2.50	44.9	3.15	2.95	35.6	3.46	3.39	
300	190.3	2.08	1.13	117.6	2.33	1.63	87.7	2.54	2.01	62.3	2.86	2.51	48.0	3.14	2.97	38.1	3.45	3.32	

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and *V₂* for RETARDANCE "B".

Grade 0.75 Percent

Q cfs	V ₁ = 2.0	V ₁ = 2.5	V ₁ = 3.0	V ₁ = 3.5	V ₁ = 4.0	V ₁ = 4.5	V ₁ = 5.0	V ₁ = 5.5	V ₁ = 6.0	Grade 0.75 Percent								
										T	D	V ₂	T	D	V ₂	T	D	V ₂
15	1.33	1.76	0.92	8.0	2.22	1.24												
20	18.2	1.75	0.93	10.4	2.10	1.35												
25	22.6	1.73	0.95	12.8	2.03	1.42	9.5	2.33	1.66									
30	27.1	1.73	0.95	15.3	2.02	1.44	11.2	2.25	1.76	8.9	2.56	1.94						
35	31.5	1.72	0.96	17.8	2.01	1.45	13.0	2.23	1.79	10.2	2.47	2.05						
40	36.0	1.72	0.96	20.2	1.98	1.48	16.8	2.21	1.81	11.6	2.44	2.09						
45	40.4	1.71	0.96	22.7	1.98	1.49	16.5	2.17	1.86	12.9	2.39	2.16						
50	44.9	1.72	0.96	25.2	1.98	1.49	18.3	2.16	1.87	14.3	2.38	2.18	10.6	2.82	2.47			
55	49.3	1.72	0.96	27.6	1.96	1.51	20.1	2.16	1.88	15.7	2.37	2.19	11.6	2.80	2.51			
60	53.7	1.72	0.97	30.1	1.96	1.51	21.9	2.16	1.89	17.1	2.36	2.20	12.5	2.73	2.61			
65	58.1	1.72	0.97	32.5	1.95	1.52	23.6	2.14	1.92	18.4	2.33	2.25	13.5	2.71	2.63	11.2	3.04	2.83
70	62.5	1.72	0.97	35.0	1.96	1.52	25.4	2.14	1.92	19.8	2.33	2.25	14.4	2.66	2.71	12.0	3.01	2.87
75	66.9	1.72	0.97	37.4	1.95	1.53	27.2	2.14	1.92	21.2	2.33	2.26	15.4	2.65	2.73	12.8	2.91	
80	71.2	1.71	0.97	39.9	1.95	1.53	29.0	2.14	1.92	22.5	2.31	2.29	16.4	2.65	2.74	13.5	2.92	3.01
90	80.0	1.71	0.97	44.8	1.95	1.53	31.5	2.12	1.94	25.3	2.31	2.29	18.4	2.63	2.76	15.1	2.89	3.07
100	88.8	1.72	0.98	49.7	1.95	1.54	36.1	2.13	1.94	28.1	2.31	2.29	20.4	2.62	2.78	16.7	2.86	3.11
110	97.6	1.72	0.98	54.7	1.95	1.53	43.7	2.13	1.94	30.8	2.30	2.31	22.4	2.61	2.79	18.3	2.84	3.15
120	106.3	1.72	0.98	59.6	1.95	1.54	49.5	2.12	1.95	33.6	2.30	2.31	24.4	2.61	2.81	19.9	2.82	3.13
130	115.0	1.72	0.98	64.5	1.95	1.54	46.8	2.12	1.95	36.4	2.30	2.31	26.3	2.58	2.85	21.5	2.81	3.20
140	123.7	1.72	0.98	69.4	1.95	1.54	50.3	2.12	1.96	39.1	2.29	2.33	28.3	2.58	2.85	23.1	2.80	3.22
150	132.4	1.72	0.98	74.2	1.95	1.55	53.9	2.12	1.95	41.9	2.30	2.32	30.3	2.58	2.86	24.7	2.79	3.24
160	141.1	1.72	0.98	79.1	1.95	1.55	57.4	2.12	1.96	44.6	2.29	2.33	32.3	2.58	2.86	26.3	2.78	3.26
170	149.7	1.72	0.98	84.0	1.95	1.55	60.9	2.12	1.97	47.4	2.30	2.33	34.3	2.58	2.86	28.0	2.80	3.24
180	158.3	1.72	0.98	88.8	1.95	1.55	64.5	2.12	1.96	50.1	2.29	2.34	36.3	2.58	2.86	29.6	2.79	3.25
190	166.9	1.72	0.98	93.7	1.95	1.55	68.0	2.12	1.97	52.8	2.29	2.34	38.3	2.58	2.83	32.6	2.78	3.26
200	175.5	1.72	0.98	98.5	1.95	1.55	71.5	2.12	1.97	55.6	2.29	2.34	40.2	2.57	2.89	32.8	2.77	3.27
220	192.8	1.72	0.99	108.3	1.95	1.55	78.6	2.12	1.97	61.1	2.29	2.34	44.2	2.57	2.89	36.0	2.77	3.29
240	210.1	1.72	0.99	118.0	1.95	1.56	85.6	2.12	1.98	66.6	2.29	2.35	48.2	2.57	2.89	39.2	2.76	3.31
260	227.3	1.72	0.99	127.7	1.95	1.56	92.7	2.12	1.98	72.1	2.29	2.35	52.2	2.57	2.89	42.5	2.77	3.30
280	244.5	1.72	0.99	137.4	1.95	1.56	99.7	2.12	1.98	77.6	2.29	2.35	56.2	2.57	2.89	45.7	2.76	3.31
300	261.7	1.72	0.99	147.1	1.95	1.56	106.8	2.12	1.98	83.0	2.29	2.36	60.1	2.57	2.90	48.9	2.76	3.32

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "D".

Grade 1.0 Percent

Q cfs	V ₁ = 2.0		V ₁ = 2.5		V ₁ = 3.0		V ₁ = 3.5		V ₁ = 4.0		V ₁ = 4.5		V ₁ = 5.0		V ₁ = 5.5		V ₁ = 6.0	
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂
15	15.7	1.55	0.91	9.9	1.80	1.24	8.8	2.04	1.65									
20	20.9	1.54	0.92	13.0	1.74	1.31	10.9	1.99	1.70	8.9	2.21	1.87						
25	26.0	1.53	0.93	16.2	1.73	1.32	12.9	1.94	1.78	10.5	2.14	1.98						
30	31.1	1.52	0.94	19.3	1.70	1.35	15.0	1.93	1.80	12.1	2.08	2.06	9.2	2.37	2.37			
35	36.2	1.52	0.94	22.5	1.70	1.36	17.0	1.92	1.81	13.7	2.04	2.12	10.4	2.32	2.45			
40	41.3	1.52	0.95	25.7	1.70	1.36	17.1	1.92	1.81	12.6	2.04	2.12	11.7	2.32	2.46			
45	46.4	1.52	0.95	28.8	1.69	1.37	19.2	1.91	1.82	15.4	2.04	2.12	12.9	2.28	2.52	9.9	2.61	2.86
50	51.5	1.52	0.95	32.0	1.70	1.37	21.2	1.89	1.85	17.0	2.02	2.16	14.1	2.25	2.57	10.8	2.57	2.93
55	56.5	1.51	0.95	35.1	1.69	1.38	23.3	1.89	1.86	18.7	2.02	2.16	15.3	2.23	2.61	11.7	2.54	3.00
60	61.6	1.52	0.95	38.3	1.69	1.37	25.4	1.89	1.86	20.3	2.00	2.19	15.3	2.23	2.61	11.7	2.54	3.00
65	66.6	1.52	0.96	41.4	1.69	1.38	27.5	1.89	1.86	22.0	2.01	2.19	16.6	2.24	2.60	12.7	2.55	2.98
70	71.6	1.51	0.96	44.6	1.70	1.38	29.5	1.88	1.88	23.6	1.99	2.21	17.8	2.22	2.63	13.6	2.52	3.03
75	76.6	1.51	0.96	47.7	1.69	1.38	31.6	1.88	1.88	25.3	2.00	2.21	19.0	2.21	2.66	14.5	2.50	3.08
80	81.6	1.52	0.96	50.8	1.69	1.38	33.7	1.88	1.88	26.9	1.99	2.22	20.3	2.22	2.64	15.4	2.48	3.11
90	91.7	1.52	0.96	57.1	1.69	1.39	37.8	1.88	1.89	30.2	1.98	2.24	22.8	2.21	2.65	17.3	2.47	3.13
100	101.7	1.52	0.96	63.4	1.69	1.39	42.0	1.88	1.89	33.5	1.98	2.24	25.2	2.19	2.69	19.2	2.47	3.14
110	111.7	1.52	0.97	69.6	1.69	1.39	46.1	1.87	1.90	36.8	1.98	2.25	27.7	2.19	2.70	21.0	2.44	3.20
120	121.7	1.52	0.97	75.8	1.69	1.39	50.2	1.87	1.90	40.1	1.98	2.26	30.2	2.19	2.70	22.9	2.44	3.26
130	131.6	1.51	0.97	82.1	1.69	1.39	54.4	1.87	1.90	43.4	1.97	2.26	32.7	2.19	2.70	24.8	2.44	3.30
140	141.5	1.51	0.97	88.3	1.69	1.39	58.5	1.87	1.90	46.7	1.97	2.26	35.2	2.19	2.70	26.6	2.42	3.34
150	151.4	1.52	0.97	94.5	1.69	1.40	62.6	1.87	1.91	50.0	1.98	2.26	37.6	2.18	2.72	28.5	2.42	3.33
160	161.3	1.52	0.97	100.7	1.69	1.40	66.7	1.87	1.91	53.3	1.98	2.26	40.1	2.18	2.72	30.4	2.43	3.33
170	171.1	1.52	0.97	106.8	1.69	1.40	70.8	1.87	1.91	56.5	1.97	2.28	42.6	2.19	2.72	32.2	2.41	3.26
180	180.9	1.52	0.98	113.0	1.69	1.40	74.9	1.87	1.91	59.8	1.97	2.27	45.0	2.18	2.73	34.1	2.42	3.25
190	190.6	1.52	0.98	119.1	1.69	1.40	79.0	1.87	1.91	63.1	1.98	2.27	47.5	2.18	2.73	35.9	2.41	3.27
200	200.4	1.52	0.98	125.3	1.69	1.40	83.0	1.87	1.92	66.3	1.97	2.28	49.9	2.18	2.74	37.8	2.41	3.27
220	220.1	1.52	0.98	137.6	1.69	1.41	91.2	1.87	1.92	72.9	1.97	2.28	54.9	2.18	2.74	41.5	2.41	3.28
240	239.8	1.52	0.98	150.0	1.69	1.41	99.4	1.87	1.93	79.5	1.98	2.28	59.8	2.18	2.75	45.3	2.41	3.28
260	259.4	1.52	0.98	162.3	1.69	1.41	107.6	1.87	1.93	86.0	1.97	2.28	64.8	2.18	2.74	49.0	2.41	3.29
280	279.0	1.52	0.98	174.6	1.70	1.41	115.8	1.87	1.93	92.5	1.97	2.29	69.7	2.18	2.75	52.7	2.40	3.30
300	298.5	1.52	0.98	186.9	1.70	1.41	123.9	1.87	1.93	99.1	1.98	2.29	74.6	2.18	2.75	56.4	2.40	3.30

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and *V₂* for RETARDANCE "E".

Grade 1.25 Percent									
Q	V ₁ = 2.0	V ₁ = 2.5	V ₁ = 3.0	V ₁ = 3.5	V ₁ = 4.0	V ₁ = 4.5	V ₁ = 5.0	V ₁ = 5.5	V ₁ = 6.0
cfs	T	D	V ₂	T	D	V ₂	T	D	V ₂
15	18.1	1.40	0.88	11.5	1.59	1.21	7.7	1.85	1.55
20	24.0	1.38	0.89	15.2	1.56	1.25	10.1	1.79	1.64
25	30.0	1.38	0.89	19.0	1.56	1.25	12.5	1.75	1.69
30	35.9	1.38	0.90	22.7	1.55	1.27	14.9	1.73	1.73
35	41.8	1.38	0.90	26.4	1.54	1.28	17.3	1.71	1.75
40	47.7	1.38	0.90	30.1	1.54	1.28	19.7	1.70	1.77
45	53.6	1.38	0.90	33.9	1.54	1.28	22.1	1.69	1.78
50	59.4	1.38	0.91	37.6	1.54	1.28	24.5	1.69	1.79
55	65.3	1.38	0.91	41.3	1.54	1.28	26.9	1.69	1.80
60	71.1	1.38	0.91	44.9	1.53	1.29	29.3	1.68	1.81
65	76.9	1.38	0.91	48.6	1.54	1.29	31.7	1.68	1.81
70	82.7	1.38	0.91	52.3	1.54	1.29	34.1	1.68	1.81
75	88.4	1.38	0.91	55.9	1.53	1.30	36.5	1.68	1.82
80	94.2	1.38	0.91	59.6	1.54	1.30	38.9	1.68	1.82
85	100.8	1.38	0.91	63.3	1.53	1.30	43.7	1.68	1.82
90	117.3	1.38	0.92	74.3	1.54	1.30	48.5	1.68	1.83
100	126.9	1.38	0.92	91.6	1.54	1.31	53.3	1.68	1.83
120	140.4	1.38	0.92	88.9	1.54	1.31	58.1	1.68	1.83
130	151.8	1.38	0.92	96.1	1.53	1.31	62.9	1.68	1.83
140	163.2	1.38	0.92	103.4	1.54	1.31	67.6	1.68	1.84
150	174.6	1.38	0.92	110.6	1.53	1.31	72.4	1.68	1.83
160	186.0	1.38	0.92	117.8	1.53	1.32	77.1	1.68	1.84
170	197.3	1.39	0.92	125.0	1.54	1.32	81.9	1.68	1.84
180	208.5	1.38	0.93	132.2	1.54	1.32	86.6	1.68	1.84
190	219.8	1.39	0.93	139.3	1.54	1.32	91.3	1.68	1.84
200	231.0	1.39	0.93	146.5	1.54	1.32	96.0	1.68	1.84
220	251.7	1.39	0.93	160.9	1.54	1.32	105.5	1.68	1.84
240	276.3	1.39	0.93	175.3	1.54	1.33	115.0	1.69	1.85
260	298.9	1.39	0.93	189.7	1.54	1.33	124.4	1.68	1.85
280	321.3	1.39	0.93	204.0	1.54	1.33	133.9	1.69	1.85
300	345.7	1.39	0.93	218.2	1.54	1.33	143.3	1.69	1.85

TABLE 3. 17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "B".

Grade 1.50 Percent

Q cfs	V ₁ = 2.0				V ₁ = 2.5				V ₁ = 3.0				V ₁ = 3.5				V ₁ = 4.0				V ₁ = 4.5				V ₁ = 5.0								
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂			
15	20.1	1.29	0.86	13.2	1.43	1.17	8.9	1.65	1.51	8.1	1.86	1.95	6.7	2.09	2.10	8.1	1.95	2.10	8.0	2.13	2.60	8.2	2.38	3.03	9.1	2.31	3.16						
20	26.8	1.29	0.86	17.5	1.42	1.19	11.7	1.60	1.58	9.9	1.77	2.10	9.6	1.90	2.43	9.2	1.86	2.72	10.4	2.02	2.82	9.1	2.26	3.03	10.9	2.21	3.03						
25	33.4	1.28	0.86	21.8	1.41	1.21	14.5	1.57	1.63	9.9	1.77	2.10	9.6	1.90	2.43	9.2	1.86	2.50	11.1	2.06	2.72	10.4	2.02	2.82	9.1	2.21	3.03	10.9	2.21	3.03			
30	40.0	1.28	0.87	26.2	1.42	1.20	17.4	1.57	1.63	11.8	1.75	2.15	9.6	1.90	2.43	9.2	1.86	2.50	11.1	2.06	2.72	10.4	2.02	2.82	9.1	2.21	3.03	10.9	2.21	3.03			
35	46.5	1.28	0.87	30.5	1.41	1.21	20.2	1.56	1.63	13.7	1.74	2.18	11.1	1.86	2.50	9.2	2.06	2.72	10.4	2.02	2.82	9.1	2.21	3.03	10.9	2.21	3.03						
40	53.1	1.28	0.87	34.8	1.41	1.21	23.0	1.55	1.67	15.6	1.73	2.20	12.6	1.84	2.56	11.7	2.02	2.82	9.1	2.21	3.03	10.9	2.21	3.03									
45	59.6	1.28	0.88	39.0	1.40	1.22	25.9	1.55	1.66	17.5	1.72	2.22	14.2	1.85	2.55	11.7	2.02	2.82	9.1	2.21	3.03	10.9	2.21	3.03									
50	66.1	1.28	0.88	43.3	1.41	1.22	28.7	1.55	1.67	19.4	1.71	2.24	15.7	1.83	2.58	12.9	1.99	2.89	10.0	2.26	3.27	10.9	2.22	3.27									
55	72.6	1.28	0.88	47.6	1.41	1.22	31.5	1.55	1.68	21.3	1.71	2.25	17.2	1.82	2.61	14.2	1.99	2.89	10.9	2.22	3.26	10.9	2.22	3.26									
60	79.0	1.28	0.88	51.8	1.41	1.22	34.3	1.54	1.69	23.2	1.70	2.25	18.8	1.82	2.60	15.4	1.97	2.94	11.9	2.22	3.26	10.1	2.45	3.29									
65	85.5	1.28	0.88	56.0	1.40	1.23	37.1	1.54	1.69	25.1	1.70	2.26	20.3	1.82	2.62	16.6	1.95	2.98	12.8	2.19	3.43	10.8	2.39	3.73									
70	91.9	1.28	0.88	60.3	1.41	1.22	39.9	1.54	1.69	27.0	1.70	2.26	21.8	1.81	2.64	17.9	1.96	3.06	13.8	2.20	3.42	11.6	2.38	3.76	9.8	2.62	4.03						
75	98.2	1.28	0.89	64.5	1.41	1.23	42.7	1.54	1.69	28.9	1.70	2.27	23.3	1.80	2.66	19.1	1.95	3.00	14.7	2.21	3.48	12.4	2.37	3.79	10.5	2.62	4.04						
80	104.6	1.28	0.89	68.7	1.41	1.23	45.5	1.54	1.70	30.8	1.70	2.27	24.9	1.81	2.64	20.4	1.95	3.00	15.7	2.18	3.46	13.2	2.36	3.81	11.1	2.58	4.15						
90	117.5	1.28	0.89	77.1	1.41	1.23	51.1	1.54	1.70	34.6	1.70	2.28	27.9	1.80	2.67	22.9	1.95	3.00	17.6	2.17	3.50	14.7	2.31	3.93	12.4	2.54	4.24						
100	130.3	1.28	0.89	85.6	1.41	1.23	56.7	1.54	1.70	38.3	1.69	2.30	31.0	1.80	2.66	25.4	1.94	3.02	19.5	2.16	3.53	16.3	2.30	3.96	13.7	2.51	4.32						
110	143.0	1.28	0.89	94.0	1.41	1.24	62.3	1.54	1.71	42.1	1.69	2.30	34.0	1.79	2.68	27.9	1.94	3.03	21.4	2.15	3.56	17.9	2.30	3.98	15.0	2.49	4.38						
120	155.8	1.28	0.89	102.4	1.41	1.24	67.9	1.54	1.71	45.9	1.69	2.30	37.1	1.80	2.68	30.4	1.94	3.03	23.3	2.14	3.57	19.5	2.29	3.99	16.3	2.47	4.43						
130	168.4	1.28	0.89	110.7	1.41	1.24	73.4	1.54	1.71	49.7	1.69	2.30	40.1	1.79	2.69	32.9	1.94	3.04	25.2	2.14	3.59	21.1	2.29	4.01	17.6	2.45	4.48						
140	181.0	1.28	0.90	119.1	1.41	1.24	79.0	1.54	1.71	53.4	1.69	2.31	43.2	1.80	2.68	35.3	1.93	3.07	27.1	2.14	3.60	22.7	2.29	4.02	18.9	2.44	4.51						
150	193.6	1.28	0.90	127.4	1.41	1.24	84.5	1.54	1.72	57.2	1.69	2.31	46.2	1.79	2.70	37.8	1.93	3.07	29.0	2.13	3.61	24.2	2.27	4.07	20.2	2.43	4.54						
160	206.2	1.28	0.90	135.7	1.41	1.24	90.0	1.54	1.72	60.9	1.69	2.32	49.3	1.80	2.69	40.3	1.93	3.07	30.9	2.13	3.62	25.0	2.27	4.08	21.6	2.45	4.51						
170	218.6	1.28	0.90	144.0	1.41	1.24	95.6	1.54	1.72	64.7	1.69	2.31	52.3	1.80	2.69	42.8	1.93	3.07	32.8	2.13	3.62	27.4	2.27	4.08	22.9	2.44	4.53						
180	231.1	1.28	0.90	152.2	1.41	1.25	101.0	1.54	1.72	68.4	1.69	2.32	55.3	1.80	2.70	45.3	1.93	3.07	34.7	2.13	3.63	29.0	2.27	4.08	24.2	2.43	4.56						
190	243.5	1.28	0.90	160.4	1.41	1.25	106.5	1.54	1.72	72.1	1.69	2.32	58.3	1.80	2.71	47.7	1.92	3.08	36.5	2.12	3.66	30.6	2.27	4.08	25.5	2.42	4.58						
200	255.8	1.28	0.91	168.6	1.41	1.25	112.0	1.54	1.72	75.9	1.69	2.32	61.3	1.79	2.71	50.2	1.93	3.08	38.4	2.12	3.66	32.1	2.26	4.12	26.8	2.42	4.60						
220	280.9	1.28	0.91	185.2	1.41	1.25	123.0	1.54	1.73	83.4	1.69	2.32	67.4	1.80	2.71	55.2	1.93	3.08	42.2	2.12	3.67	35.3	2.26	4.12	29.5	2.42	4.58						
240	305.8	1.28	0.91	201.7	1.41	1.25	134.1	1.54	1.73	90.9	1.69	2.32	73.5	1.80	2.71	60.1	1.92	3.09	46.0	2.12	3.67	38.5	2.26	4.12	32.1	2.41	4.62						
260	330.7	1.28	0.91	218.2	1.41	1.26	145.1	1.54	1.73	98.3	1.69	2.33	79.5	1.80	2.72	65.1	1.93	3.09	49.8	2.12	3.68	41.7	2.26	4.12	34.7	2.41	4.64						
280	355.5	1.28	0.91	234.7	1.41	1.26	156.0	1.54	1.73	105.8	1.69	2.33	85.5	1.79	2.72	70.0	1.93	3.10	53.6	2.12	3.68	44.8	2.25	4.14	37.4	2.41	4.63						
300	380.2	1.28	0.91	251.1	1.41	1.26	167.0	1.54	1.73	113.2	1.69	2.33	91.6	1.80	2.72	74.9	1.92	3.11	57.4	2.12	3.68	48.0	2.25	4.14	40.0	2.41	4.65						

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "B"

Grade 1.75 Percent

Q cfs	V ₁ = 2.0	V ₁ = 2.5	V ₁ = 3.0	V ₁ = 3.5	V ₁ = 4.0	V ₁ = 4.5	V ₁ = 5.0	V ₁ = 5.5	Grade 1.75 Percent												
									T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	
15	21.8	1.21	0.84	14.2	1.33	1.17	10.0	1.50	1.48	6.9	1.74	1.84	7.6	1.83	2.12	7.6	1.93	2.51			
20	29.0	1.20	0.85	18.9	1.33	1.18	13.2	1.46	1.53	9.0	1.66	1.98	11.1	1.75	2.27	9.0	1.88	2.62			
25	36.2	1.20	0.85	23.5	1.32	1.20	16.4	1.45	1.56	11.2	1.64	2.01	9.3	1.75	2.32	10.4	1.84	2.70	8.2	2.11	2.98
30	43.4	1.21	0.85	28.2	1.32	1.20	19.6	1.44	1.58	13.3	1.60	2.08	11.1	1.72	2.32	11.8	1.81	2.77	9.3	2.08	3.06
35	50.5	1.20	0.85	32.8	1.31	1.21	22.8	1.43	1.59	15.5	1.60	2.09	12.8	1.68	2.40	12.8	1.79	2.77	10.3	2.17	3.21
40	57.6	1.20	0.85	37.4	1.31	1.21	26.0	1.43	1.60	17.6	1.58	2.13	14.6	1.68	2.42	11.8	1.81	2.77	9.3	2.26	3.41
45	64.6	1.20	0.86	42.0	1.31	1.21	29.2	1.43	1.61	19.8	1.58	2.13	16.4	1.68	2.43	13.2	1.79	2.82	10.3	2.31	3.48
50	71.6	1.20	0.86	46.6	1.31	1.21	32.4	1.43	1.61	21.9	1.57	2.16	18.2	1.67	2.44	14.7	1.80	2.80	11.4	2.35	3.51
55	78.6	1.20	0.86	51.2	1.31	1.22	35.6	1.43	1.61	24.1	1.58	2.15	19.9	1.66	2.48	16.1	1.79	2.83	12.5	1.99	3.28
60	85.6	1.20	0.87	55.8	1.31	1.22	38.8	1.43	1.61	26.2	1.57	2.17	21.7	1.66	2.48	17.5	1.78	2.86	13.6	1.98	3.31
65	92.6	1.20	0.87	60.3	1.31	1.22	41.9	1.42	1.62	28.4	1.57	2.16	23.5	1.66	2.48	18.9	1.77	2.88	14.7	1.97	3.33
70	99.5	1.20	0.87	64.9	1.32	1.22	45.1	1.42	1.62	30.5	1.57	2.18	25.2	1.65	2.50	20.3	1.76	2.90	15.8	1.96	3.35
75	106.4	1.20	0.87	69.4	1.31	1.22	48.2	1.42	1.63	32.7	1.57	2.17	27.0	1.65	2.50	21.8	1.78	2.88	16.9	1.96	3.36
80	113.3	1.20	0.87	73.9	1.31	1.22	51.4	1.43	1.62	34.8	1.57	2.18	28.8	1.66	2.50	23.2	1.77	2.90	17.9	1.94	3.43
90	127.2	1.20	0.87	83.0	1.31	1.23	57.7	1.42	1.63	39.1	1.57	2.18	32.3	1.65	2.50	26.0	1.76	2.93	20.1	1.93	3.45
100	141.0	1.20	0.87	92.1	1.32	1.23	64.0	1.42	1.64	43.4	1.57	2.18	35.8	1.64	2.53	28.9	1.76	2.92	22.3	1.93	3.46
110	154.9	1.21	0.87	101.2	1.32	1.23	70.4	1.43	1.63	47.7	1.57	2.19	39.4	1.65	2.52	31.7	1.76	2.94	24.5	1.92	3.47
120	168.6	1.20	0.88	110.2	1.32	1.23	76.6	1.42	1.64	51.9	1.57	2.20	42.9	1.64	2.53	34.6	1.76	2.93	21.9	2.08	3.48
130	182.3	1.21	0.88	119.2	1.32	1.23	82.9	1.42	1.64	56.2	1.57	2.20	46.4	1.64	2.54	37.4	1.76	2.95	28.9	2.07	3.49
140	196.0	1.21	0.88	128.1	1.32	1.23	89.2	1.43	1.64	60.4	1.57	2.21	49.9	1.64	2.55	40.2	1.75	2.96	31.1	1.92	3.49
150	209.6	1.21	0.88	137.1	1.32	1.23	95.4	1.42	1.64	64.7	1.57	2.20	53.4	1.64	2.55	43.1	1.76	2.95	33.3	1.92	3.49
160	223.1	1.21	0.88	146.0	1.32	1.24	101.6	1.42	1.65	68.9	1.57	2.21	56.9	1.64	2.55	45.9	1.76	2.96	35.4	1.91	3.52
170	236.6	1.21	0.88	154.9	1.32	1.24	107.9	1.43	1.64	73.1	1.57	2.21	60.4	1.64	2.55	48.7	1.76	2.96	37.6	1.91	3.52
180	250.0	1.21	0.89	163.7	1.32	1.24	114.0	1.43	1.65	77.4	1.57	2.21	63.9	1.64	2.55	51.5	1.75	2.97	39.8	1.92	3.52
190	263.4	1.21	0.89	172.6	1.32	1.24	120.2	1.43	1.65	81.6	1.57	2.21	67.4	1.64	2.55	54.3	1.75	2.97	42.0	1.92	3.52
200	276.7	1.21	0.89	181.4	1.32	1.24	126.4	1.43	1.65	85.7	1.57	2.22	70.8	1.64	2.56	57.1	1.75	2.98	44.1	1.91	3.54
220	303.8	1.21	0.89	189.2	1.32	1.24	138.8	1.43	1.65	94.2	1.57	2.22	77.8	1.64	2.57	62.8	1.76	2.97	48.5	1.91	3.53
240	330.8	1.21	0.89	217.0	1.32	1.24	151.2	1.43	1.66	102.7	1.57	2.22	84.8	1.64	2.57	68.4	1.75	2.98	52.9	1.92	3.53
260	357.7	1.21	0.89	234.7	1.32	1.25	163.6	1.43	1.66	111.1	1.57	2.22	91.8	1.64	2.57	74.1	1.76	2.98	57.2	1.91	3.54
280	384.5	1.21	0.89	252.3	1.32	1.25	176.0	1.43	1.66	119.5	1.57	2.23	98.7	1.64	2.58	79.7	1.76	2.98	61.6	1.92	3.54
300	411.2	1.21	0.90	269.9	1.32	1.25	188.3	1.43	1.66	127.9	1.57	2.23	105.7	1.64	2.57	85.3	1.76	2.99	65.9	1.91	3.55

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "B".

Q cfs	Grade 2.0 Percent										V ₁ = 6.0									
	V ₁ = 2.0	V ₁ = 2.5	V ₁ = 3.0	V ₁ = 3.5	V ₁ = 4.0	V ₁ = 4.5	V ₁ = 5.0	V ₁ = 5.5	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂
15	24.7	1.14	0.79	15.0	1.25	1.18	11.0	1.40	7.8	1.56	1.81	7.5	1.71	2.29	6.3	1.91	2.44			
20	32.8	1.14	0.79	20.0	1.25	1.18	14.5	1.37	1.49	10.3	1.53	1.88	7.7	1.82	2.62	7.6	1.97	2.95		
25	41.0	1.14	0.79	24.9	1.24	1.20	18.1	1.37	1.50	12.7	1.48	1.96	9.3	1.68	2.36	8.8	1.94	3.03		
30	49.0	1.14	0.80	29.8	1.24	1.20	21.6	1.35	1.52	1.48	1.98	11.0	1.63	2.47	9.1	1.77	2.76			
35	57.1	1.14	0.80	34.7	1.24	1.21	25.1	1.35	1.54	17.7	1.47	1.99	12.8	1.62	2.50	10.5	1.73	2.86		
40	65.1	1.14	0.80	39.6	1.24	1.21	28.7	1.35	1.53	20.2	1.47	2.00	14.6	1.62	2.51	12.0	1.73	3.18	8.2	2.13
45	73.1	1.14	0.80	44.5	1.24	1.21	32.2	1.35	1.54	22.6	1.46	2.03	16.4	1.61	2.52	13.5	1.73	3.21	9.1	2.08
50	81.0	1.14	0.81	49.3	1.24	1.22	35.7	1.35	1.55	25.1	1.46	2.03	18.1	1.59	2.57	14.9	1.71	2.92	12.3	2.24
55	88.9	1.14	0.81	56.2	1.24	1.21	39.2	1.34	1.55	27.6	1.46	2.03	19.9	1.60	2.57	16.4	1.71	3.15	11.0	2.03
60	96.8	1.14	0.81	59.0	1.24	1.22	42.7	1.34	1.55	30.0	1.45	2.05	21.7	1.60	2.57	17.8	1.69	2.95	14.7	2.01
65	104.6	1.14	0.81	63.8	1.24	1.22	46.2	1.35	1.55	32.5	1.46	2.04	23.4	1.58	2.60	19.3	1.70	2.94	15.8	2.00
70	112.4	1.14	0.81	68.6	1.24	1.22	49.7	1.35	1.56	43.9	1.45	2.05	25.2	1.59	2.60	20.7	1.69	2.98	17.0	2.03
75	120.2	1.14	0.81	73.4	1.24	1.22	53.1	1.34	1.56	37.3	1.45	2.06	27.0	1.59	2.60	22.2	1.69	2.96	18.2	2.02
80	127.9	1.14	0.82	78.1	1.24	1.23	56.6	1.35	1.56	39.8	1.45	2.06	28.7	1.58	2.62	23.6	1.69	2.99	19.4	2.02
90	143.6	1.14	0.82	87.8	1.24	1.23	63.5	1.34	1.57	44.7	1.45	2.06	32.3	1.59	2.61	26.5	1.68	3.00	21.8	1.97
100	159.2	1.14	0.82	97.4	1.24	1.23	70.5	1.34	1.57	49.6	1.45	2.07	35.8	1.58	2.63	29.4	1.68	3.01	24.1	1.80
110	174.8	1.14	0.82	106.9	1.24	1.23	77.4	1.34	1.57	54.5	1.45	2.07	39.3	1.58	2.64	32.3	1.68	3.02	26.3	1.80
120	190.3	1.14	0.82	116.5	1.24	1.23	84.3	1.34	1.58	59.4	1.45	2.07	42.8	1.58	2.65	35.2	1.68	3.02	28.9	1.80
130	205.7	1.14	0.82	126.0	1.24	1.23	91.2	1.34	1.58	64.2	1.45	2.08	46.4	1.58	2.64	38.1	1.68	3.03	31.3	1.80
140	221.0	1.14	0.82	135.4	1.24	1.24	98.0	1.34	1.58	69.1	1.45	2.08	49.9	1.58	2.64	41.0	1.68	3.03	33.6	1.80
150	236.3	1.14	0.83	144.9	1.25	1.24	104.9	1.34	1.58	73.9	1.45	2.08	53.4	1.58	2.65	43.9	1.68	3.03	36.0	1.80
160	251.5	1.14	0.83	154.3	1.25	1.24	111.7	1.34	1.59	78.7	1.45	2.09	56.9	1.58	2.65	46.7	1.67	3.05	38.3	1.79
170	266.6	1.14	0.83	163.7	1.25	1.24	118.5	1.34	1.59	83.6	1.45	2.08	60.3	1.58	2.66	49.6	1.68	3.05	39.5	1.78
180	281.7	1.14	0.83	173.0	1.25	1.24	125.2	1.34	1.59	88.4	1.45	2.09	63.8	1.58	2.66	52.5	1.68	3.04	43.0	1.79
190	296.7	1.14	0.83	182.3	1.25	1.24	132.0	1.34	1.59	93.2	1.45	2.09	67.3	1.58	2.66	55.3	1.68	3.06	45.4	1.79
200	311.7	1.14	0.83	191.6	1.25	1.24	138.7	1.34	1.60	97.9	1.45	2.10	70.7	1.58	2.67	58.2	1.68	3.05	47.7	1.79
220	342.1	1.14	0.83	210.4	1.25	1.25	152.4	1.35	1.60	107.6	1.45	2.10	77.7	1.58	2.67	63.9	1.68	3.06	52.5	1.80
240	372.4	1.14	0.84	229.2	1.25	1.25	165.9	1.34	1.60	117.2	1.45	2.10	84.7	1.58	2.67	69.7	1.68	3.06	57.2	1.80
260	402.5	1.14	0.84	247.9	1.25	1.25	179.5	1.34	1.60	126.8	1.45	2.10	91.7	1.58	2.67	75.4	1.68	3.07	61.9	1.80
280	432.6	1.14	0.84	266.5	1.25	1.25	193.0	1.34	1.61	136.4	1.45	2.10	98.6	1.58	2.68	81.1	1.68	3.07	66.6	1.80
300	462.5	1.14	0.84	285.1	1.25	1.25	146.0	1.35	1.61	146.0	1.46	2.10	105.5	1.58	2.69	86.8	1.68	3.07	71.2	1.79

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top width (T), Depth (D) and V₂ for RETARDANCE "B".

Grade 3.0 Percent

Q cfs	V ₁ = 2.0		V ₁ = 2.5		V ₁ = 3.0		V ₁ = 3.5		V ₁ = 4.0		V ₁ = 4.5		V ₁ = 5.0		V ₁ = 5.5		V ₁ = 6.0	
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂
15	28.1	0.98	0.80	19.2	1.05	1.10	13.4	1.15	1.44	10.3	1.24	1.74	7.6	1.37	2.12	5.8	1.56	2.44
20	37.4	0.98	0.80	25.6	1.05	1.10	17.8	1.14	1.45	13.7	1.23	1.76	10.0	1.33	2.22	7.6	1.50	2.59
25	46.7	0.99	0.80	31.9	1.05	1.11	22.2	1.14	1.47	17.0	1.21	1.80	12.5	1.33	2.23	9.4	1.46	2.69
30	55.9	0.99	0.81	38.2	1.05	1.11	26.6	1.14	1.47	20.3	1.20	1.82	14.9	1.31	2.27	11.2	1.44	2.75
35	65.0	0.99	0.81	44.4	1.04	1.12	31.0	1.14	1.47	23.7	1.21	1.81	17.3	1.30	2.30	13.0	1.43	2.80
40	74.1	0.99	0.81	50.6	1.04	1.12	35.3	1.14	1.48	27.0	1.20	1.83	19.7	1.29	2.33	13.1	1.46	2.83
45	83.2	0.99	0.81	56.8	1.04	1.13	39.7	1.14	1.48	30.3	1.20	1.84	22.1	1.29	2.34	16.6	1.41	2.85
50	92.2	0.99	0.81	63.0	1.04	1.13	44.0	1.14	1.48	33.6	1.20	1.84	24.6	1.30	2.32	18.4	1.40	2.87
55	101.1	0.99	0.82	69.1	1.04	1.13	48.3	1.14	1.49	36.9	1.20	1.84	27.0	1.30	2.34	20.2	1.40	2.88
60	110.1	0.99	0.82	75.3	1.05	1.13	52.6	1.14	1.49	40.2	1.20	1.85	29.4	1.29	2.34	22.0	1.40	2.89
65	118.9	0.99	0.82	81.4	1.05	1.13	56.9	1.14	1.49	43.4	1.20	1.86	31.8	1.29	2.35	23.8	1.40	2.90
70	127.8	0.99	0.82	87.4	1.04	1.14	61.1	1.14	1.50	46.7	1.20	1.86	34.2	1.29	2.35	23.6	1.40	2.90
75	136.6	0.99	0.82	93.5	1.05	1.14	65.4	1.14	1.50	54.9	1.20	1.87	36.6	1.29	2.35	27.4	1.40	2.91
80	145.3	0.99	0.83	99.5	1.05	1.14	69.6	1.14	1.50	53.1	1.20	1.87	38.9	1.29	2.37	29.2	1.40	2.91
90	163.1	0.99	0.83	111.7	1.05	1.14	78.2	1.14	1.50	59.7	1.20	1.87	43.7	1.29	2.38	32.7	1.39	2.94
100	180.8	0.99	0.83	123.8	1.05	1.15	86.7	1.14	1.51	66.2	1.20	1.88	48.5	1.29	2.38	36.3	1.39	2.95
110	198.3	0.99	0.83	135.9	1.05	1.15	95.7	1.14	1.51	72.7	1.20	1.88	53.3	1.29	2.38	39.9	1.39	2.95
120	215.8	0.99	0.83	148.0	1.05	1.15	103.7	1.14	1.51	79.2	1.20	1.88	58.1	1.29	2.38	43.5	1.39	2.95
130	233.3	0.99	0.83	160.0	1.05	1.15	112.1	1.14	1.51	85.7	1.20	1.88	62.8	1.29	2.39	47.0	1.39	2.96
140	250.6	0.99	0.84	171.9	1.05	1.15	120.5	1.14	1.52	92.1	1.20	1.89	67.6	1.29	2.38	50.6	1.39	2.96
150	267.8	0.99	0.84	183.8	1.05	1.16	128.9	1.14	1.52	98.5	1.20	1.89	72.3	1.29	2.39	54.1	1.39	2.97
160	285.0	0.99	0.84	195.7	1.05	1.16	137.2	1.14	1.52	104.9	1.20	1.89	77.0	1.29	2.39	57.7	1.39	2.96
170	302.0	0.99	0.84	207.5	1.05	1.16	145.5	1.14	1.52	111.3	1.20	1.89	81.7	1.29	2.40	61.2	1.39	2.97
180	319.0	0.99	0.84	219.2	1.05	1.16	153.8	1.14	1.53	117.7	1.20	1.89	86.4	1.29	2.40	64.7	1.39	2.98
190	335.9	0.99	0.85	231.0	1.05	1.16	162.1	1.14	1.53	124.0	1.20	1.90	91.1	1.30	2.40	68.2	1.39	2.98
200	352.7	0.99	0.85	242.6	1.05	1.16	170.3	1.14	1.53	130.3	1.20	1.90	95.7	1.29	2.40	71.7	1.39	2.99
220	387.1	0.99	0.85	266.3	1.05	1.16	187.0	1.14	1.53	143.1	1.20	1.90	105.1	1.29	2.41	78.8	1.39	2.99
240	421.2	0.99	0.85	289.9	1.05	1.17	201.6	1.14	1.53	155.9	1.20	1.90	114.5	1.29	2.41	85.9	1.39	3.00
260	455.2	0.99	0.85	313.4	1.05	1.17	220.2	1.14	1.54	168.6	1.20	1.91	123.9	1.30	2.41	92.9	1.39	3.00
280	489.0	0.99	0.85	336.9	1.05	1.17	236.7	1.14	1.54	181.3	1.20	1.91	133.3	1.30	2.41	99.9	1.39	3.00
300	522.6	0.99	0.86	360.2	1.05	1.17	253.2	1.15	1.54	193.9	1.20	1.91	142.6	1.30	2.42	106.9	1.39	3.00

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and *V₂* for RETARDANCE "B".

Q cfs	Grade 4.0 Percent												<i>V₁</i> = 6.0								
	<i>V₁</i> = 2.0	<i>V₁</i> = 2.5	<i>V₁</i> = 3.0	<i>V₁</i> = 3.5	<i>V₁</i> = 4.0	<i>V₁</i> = 4.5	<i>V₁</i> = 5.0	<i>V₁</i> = 5.5	T	D	<i>V₂</i>	T	D	<i>V₂</i>	T	D	<i>V₂</i>				
cfs	T	D	<i>V₂</i>	T	D	<i>V₂</i>	T	D	<i>V₂</i>	T	D	<i>V₂</i>	T	D	<i>V₂</i>	T	D	<i>V₂</i>			
15	33.1	0.87	0.77	23.6	0.93	1.01	16.3	1.00	1.36	12.1	1.08	1.69	9.2	1.15	2.08	7.4	1.27	2.34	5.7	1.43	2.69
20	44.0	0.87	0.77	31.4	0.93	1.01	21.7	1.00	1.37	16.1	1.08	1.70	12.3	1.16	2.08	9.7	1.23	2.48	7.4	1.35	2.94
25	54.9	0.87	0.77	39.1	0.93	1.02	27.1	1.00	1.37	20.1	1.08	1.71	15.3	1.15	2.11	12.1	1.22	2.50	9.2	1.33	3.01
30	65.7	0.87	0.78	46.8	0.93	1.02	32.4	0.99	1.38	24.0	1.07	1.73	18.3	1.14	2.13	14.4	1.20	2.57	11.0	1.32	3.05
35	76.4	0.87	0.78	54.5	0.93	1.02	37.7	0.99	1.39	27.9	1.07	1.74	21.3	1.14	2.14	16.8	1.20	2.57	12.7	1.30	3.14
40	87.1	0.87	0.78	62.1	0.93	1.03	43.0	0.99	1.39	31.9	1.07	1.74	24.3	1.14	2.15	19.2	1.21	2.56	16.5	1.30	3.15
45	97.7	0.87	0.78	69.7	0.93	1.03	48.3	0.99	1.39	35.8	1.07	1.74	27.2	1.13	2.17	21.5	1.20	2.59	16.3	1.30	3.16
50	108.3	0.87	0.78	77.3	0.93	1.03	53.5	0.99	1.40	39.7	1.07	1.75	30.2	1.13	2.17	23.9	1.20	2.58	18.1	1.30	3.16
55	118.8	0.87	0.78	84.7	0.93	1.04	58.7	0.99	1.40	43.6	1.07	1.75	33.2	1.13	2.17	26.2	1.20	2.60	19.8	1.29	3.21
60	129.2	0.87	0.79	92.2	0.93	1.04	63.9	0.99	1.40	47.4	1.07	1.76	36.1	1.13	2.18	28.5	1.19	2.62	21.6	1.29	3.20
65	139.6	0.87	0.79	99.0	0.93	1.04	69.1	0.99	1.41	51.3	1.07	1.76	39.0	1.13	2.19	30.9	1.20	2.61	23.4	1.29	3.19
70	149.4	0.88	0.79	107.0	0.93	1.04	74.2	0.99	1.41	55.1	1.07	1.77	42.0	1.13	2.19	33.2	1.20	2.62	25.1	1.28	3.23
75	160.2	0.88	0.79	114.3	0.93	1.05	79.3	0.99	1.42	58.9	1.07	1.77	44.9	1.13	2.19	35.5	1.20	2.62	26.9	1.29	3.22
80	170.4	0.88	0.79	121.6	0.93	1.05	84.4	0.99	1.42	62.7	1.07	1.77	47.8	1.13	2.20	37.8	1.20	2.63	28.6	1.28	3.24
90	191.1	0.88	0.80	136.5	0.95	1.05	94.8	0.99	1.42	70.4	1.07	1.78	53.7	1.13	2.20	42.4	1.19	2.65	32.1	1.28	3.26
100	211.9	0.88	0.80	151.2	0.95	1.05	105.1	0.99	1.42	78.1	1.07	1.78	59.6	1.13	2.20	47.1	1.20	2.64	35.7	1.29	3.24
110	231.3	0.88	0.80	165.9	0.95	1.06	115.3	0.99	1.43	85.8	1.07	1.78	65.4	1.13	2.21	51.7	1.19	2.65	39.2	1.29	3.25
120	252.7	0.88	0.80	180.5	0.93	1.06	125.5	0.99	1.43	93.4	1.07	1.78	71.2	1.13	2.22	56.3	1.19	2.66	42.7	1.29	3.26
130	273.0	0.88	0.80	195.1	0.93	1.06	135.6	0.99	1.43	101.0	1.07	1.79	77.0	1.13	2.22	60.9	1.19	2.66	46.2	1.29	3.26
140	293.2	0.88	0.80	209.5	0.93	1.06	145.7	0.99	1.44	108.5	1.07	1.79	82.8	1.13	2.22	65.5	1.20	2.66	49.6	1.28	3.28
150	313.5	0.88	0.81	223.9	0.93	1.07	155.8	0.99	1.44	116.0	1.07	1.80	88.6	1.13	2.22	70.1	1.20	2.66	53.1	1.28	3.28
160	333.7	0.88	0.81	238.1	0.93	1.07	165.8	1.00	1.44	121.5	1.07	1.80	94.3	1.13	2.23	74.6	1.20	2.67	56.6	1.28	3.28
170	353.4	0.88	0.81	252.7	0.93	1.07	175.8	1.00	1.44	131.0	1.07	1.80	100.0	1.13	2.23	79.2	1.20	2.67	60.0	1.28	3.29
180	373.8	0.88	0.81	266.5	0.93	1.07	185.7	1.00	1.45	139.4	1.07	1.80	105.7	1.13	2.24	83.7	1.20	2.68	63.5	1.28	3.29
190	392.2	0.88	0.81	280.2	0.93	1.08	195.6	1.00	1.45	145.8	1.07	1.81	111.4	1.13	2.24	88.2	1.20	2.68	66.9	1.28	3.30
200	411.3	0.88	0.82	294.6	0.93	1.08	205.4	1.00	1.45	155.2	1.07	1.81	117.1	1.14	2.24	92.7	1.20	2.68	70.3	1.28	3.30
210	431.2	0.88	0.82	313.1	0.93	1.08	225.5	1.00	1.46	163.2	1.07	1.81	128.6	1.14	2.24	101.9	1.20	2.68	77.2	1.28	3.31
220	451.7	0.88	0.82	331.1	0.93	1.08	245.3	1.00	1.46	181.2	1.07	1.81	140.0	1.14	2.25	110.9	1.20	2.69	86.1	1.28	3.32
230	471.5	0.88	0.82	351.2	0.93	1.09	265.2	1.00	1.46	198.0	1.07	1.82	151.5	1.14	2.25	120.0	1.20	2.69	91.0	1.28	3.32
240	491.0	0.88	0.82	374.9	0.93	1.09	284.9	1.00	1.47	211.9	1.08	1.82	162.8	1.14	2.25	129.0	1.20	2.70	97.9	1.28	3.32
250	509.3	0.88	0.82	395.1	0.93	1.09	304.8	1.00	1.47	227.6	1.08	1.83	174.2	1.14	2.25	138.1	1.20	2.69	104.8	1.29	3.32

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

Q cfs	V ₁ for RETARDANCE "D". Top width (T), Depth (D) and V ₂ for RETARDANCE "E".												Grade 5.0 Percent											
	V ₁ = 2.0			V ₁ = 2.5			V ₁ = 3.0			V ₁ = 3.5			V ₁ = 4.0			V ₁ = 4.5			V ₁ = 5.0			V ₁ = 5.5		
T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	
15	34.8	0.80	0.79	25.2	0.86	1.02	17.7	0.92	1.36	14.3	0.96	1.61	10.6	1.04	2.00	8.4	1.12	2.34	6.7	1.23	2.67	5.4	1.36	3.00
20	46.3	0.80	0.79	33.5	0.86	1.02	23.5	0.92	1.37	19.0	0.96	1.62	14.1	1.04	2.02	11.1	1.10	2.41	8.8	1.19	2.81	7.0	1.28	3.29
25	57.7	0.80	0.80	41.7	0.86	1.03	29.3	0.92	1.38	23.7	0.96	1.63	17.5	1.03	2.06	13.8	1.09	2.46	10.9	1.17	2.90	8.7	1.26	3.37
30	69.0	0.80	0.80	49.9	0.86	1.04	35.0	0.91	1.39	28.3	0.95	1.65	21.1	1.03	2.06	16.6	1.10	2.44	19.0	1.15	2.96	10.4	1.25	3.41
35	80.3	0.80	0.80	58.1	0.86	1.04	40.8	0.91	1.39	33.0	0.95	1.65	24.4	1.02	2.06	19.3	1.09	2.46	15.2	1.16	2.94	12.1	1.24	3.45
40	91.5	0.81	0.80	66.2	0.86	1.04	46.5	0.91	1.40	37.6	0.95	1.66	27.8	1.02	2.09	22.0	1.09	2.47	17.3	1.15	2.97	13.8	1.24	3.47
45	102.6	0.81	0.81	74.2	0.86	1.05	52.2	0.91	1.40	42.2	0.95	1.66	31.3	1.03	2.08	24.7	1.09	2.48	19.4	1.15	2.99	15.4	1.22	3.55
50	113.7	0.81	0.81	82.3	0.86	1.05	57.9	0.92	1.40	46.8	0.95	1.66	34.7	1.03	2.08	27.3	1.08	2.51	21.5	1.15	3.01	17.1	1.22	3.55
55	124.7	0.81	0.81	90.2	0.86	1.05	63.5	0.91	1.41	51.4	0.96	1.66	38.0	1.02	2.08	30.0	1.08	2.51	23.7	1.15	2.98	18.8	1.22	3.55
60	135.7	0.81	0.81	98.2	0.86	1.05	69.1	0.91	1.41	56.0	0.96	1.66	41.4	1.02	2.11	32.7	1.08	2.51	25.8	1.15	3.00	20.5	1.22	3.55
65	146.5	0.81	0.81	106.1	0.86	1.05	74.7	0.92	1.41	60.5	0.96	1.67	44.8	1.02	2.10	35.3	1.08	2.53	27.9	1.15	3.00	22.1	1.22	3.59
70	157.3	0.81	0.82	113.9	0.86	1.06	80.2	0.91	1.42	65.0	0.96	1.67	48.1	1.02	2.11	38.0	1.08	2.53	30.0	1.15	3.01	23.8	1.22	3.58
75	168.1	0.81	0.82	121.7	0.86	1.06	85.8	0.92	1.42	69.5	0.96	1.67	51.4	1.02	2.12	40.6	1.08	2.54	32.0	1.15	3.04	25.4	1.21	3.62
80	178.8	0.81	0.82	129.4	0.86	1.06	91.3	0.92	1.42	74.0	0.96	1.67	54.8	1.02	2.12	43.3	1.09	2.53	34.1	1.15	3.04	27.1	1.22	3.61
90	200.5	0.81	0.82	145.2	0.86	1.06	102.4	0.92	1.43	83.0	0.96	1.68	61.5	1.02	2.12	48.6	1.08	2.54	38.3	1.15	3.05	30.4	1.21	3.63
100	222.2	0.81	0.82	160.9	0.86	1.07	112.5	0.92	1.43	92.1	0.96	1.68	68.2	1.02	2.13	53.9	1.08	2.54	42.5	1.15	3.05	33.8	1.22	3.61
110	243.7	0.81	0.82	176.5	0.86	1.07	124.6	0.92	1.43	101.0	0.96	1.69	74.8	1.02	2.14	59.2	1.09	2.55	46.7	1.15	3.05	37.1	1.22	3.63
120	265.0	0.81	0.83	192.0	0.86	1.07	135.6	0.92	1.43	110.0	0.96	1.69	81.4	1.02	2.15	64.4	1.08	2.56	50.8	1.15	3.07	40.4	1.21	3.64
130	286.3	0.81	0.83	207.5	0.86	1.08	146.6	0.92	1.43	118.9	0.96	1.69	88.1	1.02	2.14	69.7	1.09	2.56	55.0	1.15	3.06	43.7	1.21	3.65
140	307.4	0.81	0.83	222.8	0.86	1.08	157.5	0.92	1.44	127.8	0.96	1.69	94.6	1.02	2.15	74.9	1.08	2.57	59.1	1.15	3.07	47.0	1.21	3.65
150	328.4	0.81	0.83	238.1	0.87	1.08	168.3	0.92	1.44	136.7	0.96	1.70	101.2	1.02	2.15	80.1	1.08	2.57	63.2	1.15	3.08	50.2	1.21	3.67
160	349.3	0.81	0.83	253.2	0.86	1.08	179.1	0.92	1.44	145.4	0.96	1.70	107.7	1.02	2.16	85.3	1.09	2.57	67.3	1.15	3.09	53.5	1.21	3.67
170	370.0	0.81	0.84	268.3	0.87	1.09	189.9	0.92	1.45	154.1	0.96	1.70	114.2	1.02	2.16	90.4	1.08	2.58	71.4	1.15	3.09	56.8	1.21	3.67
180	390.7	0.82	0.84	283.3	0.87	1.09	200.6	0.92	1.45	162.9	0.96	1.70	120.7	1.02	2.17	95.6	1.15	2.58	75.5	1.15	3.09	60.0	1.21	3.69
190	411.2	0.82	0.84	298.2	0.87	1.09	211.2	0.92	1.45	171.5	0.96	1.71	127.1	1.02	2.17	100.7	1.18	2.59	79.6	1.15	3.09	63.3	1.21	3.68
200	431.5	0.82	0.84	313.0	0.87	1.09	221.8	0.92	1.45	180.2	0.96	1.71	133.5	1.02	2.18	105.8	1.09	2.59	83.6	1.15	3.09	66.5	1.21	3.69
220	473.3	0.82	0.84	343.4	0.87	1.10	243.4	0.92	1.46	197.8	0.97	1.71	146.6	1.02	2.18	116.2	1.09	2.60	91.9	1.15	3.10	73.1	1.22	3.69
240	514.8	0.82	0.84	313.6	0.87	1.10	264.9	0.92	1.46	215.3	0.97	1.72	159.6	1.02	2.18	126.5	1.09	2.60	100.1	1.15	3.10	79.6	1.21	3.69
250	556.1	0.82	0.85	403.6	0.87	1.10	286.3	0.92	1.46	232.7	0.97	1.72	172.6	1.03	2.19	136.8	1.09	2.61	108.2	1.15	3.11	86.1	1.21	3.71
280	597.1	0.82	0.85	433.5	0.87	1.10	307.6	0.92	1.47	250.1	0.97	1.72	185.5	1.03	2.19	147.1	1.09	2.61	116.4	1.15	3.12	92.6	1.21	3.71
300	638.0	0.82	0.85	463.1	0.87	1.11	328.7	0.92	1.47	267.4	0.97	1.73	198.4	1.03	2.19	157.3	1.09	2.61	124.5	1.15	3.12	99.1	1.22	3.71

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "B".

Grade 6.0 Percent

Q cf ^a	V ₁ = 2.0		V ₁ = 2.5		V ₁ = 3.0		V ₁ = 3.5		V ₁ = 4.0		V ₁ = 4.5		V ₁ = 5.0		V ₁ = 5.5		V ₁ = 6.0										
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂									
15	40.5	0.72	0.76	26.9	0.81	1.02	19.6	0.85	1.34	14.8	0.90	1.66	11.7	0.96	1.97	9.4	1.02	2.31	6.1	1.18	3.05	5.0	1.32	3.33			
20	53.9	0.72	0.76	35.7	0.81	1.03	26.1	0.85	1.34	19.6	0.89	1.69	15.6	0.96	1.97	12.5	1.01	2.33	10.1	1.14	3.23	6.5	1.24	3.63			
25	67.1	0.72	0.76	44.5	0.81	1.03	32.5	0.85	1.35	24.5	0.90	1.69	19.4	0.95	2.00	15.5	1.00	2.39	12.5	1.06	2.80	10.0	1.14	3.24	8.1	1.23	3.69
30	80.3	0.72	0.76	53.2	0.80	1.04	38.9	0.85	1.35	29.3	0.89	1.70	23.3	0.96	1.99	18.6	1.00	2.39	15.0	1.06	2.80	11.9	1.12	3.32	9.6	1.20	3.84
35	93.4	0.72	0.76	61.9	0.81	1.04	45.3	0.85	1.35	34.1	0.89	1.71	27.1	0.96	2.00	21.6	0.99	2.42	17.4	1.05	2.84	13.9	1.13	3.31	11.2	1.20	3.84
40	106.4	0.73	0.77	70.6	0.81	1.04	51.6	0.85	1.36	38.9	0.89	1.71	30.9	0.95	2.01	24.7	1.00	2.41	19.9	1.05	2.83	15.8	1.12	3.36	12.7	1.19	3.93
45	119.3	0.73	0.77	79.2	0.81	1.04	57.9	0.85	1.36	43.7	0.90	1.71	34.6	0.95	2.03	27.7	1.00	2.42	22.3	1.05	2.86	17.7	1.11	3.40	14.3	1.19	3.92
50	132.1	0.73	0.77	87.7	0.81	1.05	64.1	0.84	1.37	48.4	0.89	1.71	38.4	0.95	2.03	30.7	0.99	2.43	24.7	1.05	2.87	19.7	1.12	3.38	15.8	1.18	3.98
55	144.9	0.73	0.77	96.2	0.81	1.05	70.4	0.85	1.37	53.1	0.89	1.72	42.2	0.95	2.03	33.7	0.99	2.44	27.1	1.04	2.89	21.6	1.11	3.40	17.4	1.18	3.96
60	157.5	0.73	0.77	104.6	0.81	1.05	76.5	0.84	1.38	57.8	0.89	1.72	45.9	0.95	2.04	36.7	1.00	2.44	29.6	1.05	2.87	23.5	1.11	3.42	18.9	1.18	4.01
65	170.1	0.73	0.78	113.0	0.81	1.06	82.7	0.85	1.38	62.5	0.90	1.72	49.6	0.95	2.04	39.7	1.00	2.44	32.0	1.05	2.88	25.4	1.11	3.43	20.5	1.18	3.98
70	182.6	0.73	0.78	121.3	0.81	1.06	88.8	0.85	1.38	67.2	0.90	1.72	53.3	0.95	2.05	42.7	1.00	2.44	34.4	1.05	2.88	27.4	1.11	3.41	22.0	1.18	4.01
75	195.1	0.73	0.78	129.6	0.81	1.06	94.6	0.85	1.39	71.8	0.90	1.73	57.0	0.95	2.05	45.6	1.00	2.46	36.7	1.04	2.91	29.3	1.11	3.42	23.6	1.18	3.99
80	207.4	0.73	0.78	137.8	0.81	1.06	100.9	0.85	1.39	76.4	0.90	1.73	60.6	0.95	2.06	48.6	1.00	2.45	39.1	1.05	2.91	31.2	1.11	3.42	25.1	1.18	4.02
90	232.6	0.73	0.78	154.5	1.81	1.07	113.2	0.85	1.40	85.8	0.90	1.73	68.1	0.95	2.06	54.6	1.00	2.45	43.9	1.05	2.92	35.0	1.11	3.44	28.2	1.18	4.02
100	257.7	0.73	0.78	171.2	0.81	1.07	125.5	0.85	1.40	95.1	0.90	1.74	75.5	0.95	2.06	60.5	1.00	2.46	48.7	1.05	2.92	38.8	1.11	3.46	31.3	1.18	4.03
110	282.6	0.74	0.78	187.8	0.81	1.07	137.7	0.85	1.40	104.4	0.90	1.74	82.8	0.95	2.07	62.4	1.00	2.47	53.5	1.05	2.92	42.6	1.11	3.47	34.4	1.18	4.03
120	307.3	0.74	0.79	204.2	0.81	1.08	149.8	0.85	1.40	113.6	0.90	1.74	90.2	0.95	2.07	72.3	1.00	2.47	58.3	1.05	2.92	46.4	1.11	3.47	37.4	1.18	4.06
130	331.9	0.74	0.79	220.6	0.81	1.08	161.9	0.85	1.41	122.8	0.90	1.75	97.5	0.95	2.08	78.2	1.00	2.48	63.0	1.05	2.93	50.2	1.11	3.48	40.5	1.18	4.05
140	356.3	0.74	0.79	236.8	0.81	1.08	173.9	0.85	1.41	131.9	0.90	1.75	104.7	0.95	2.09	84.0	1.00	2.48	67.7	1.05	2.94	54.0	1.11	3.48	43.5	1.18	4.07
150	380.5	0.74	0.79	253.0	0.81	1.09	185.8	0.85	1.41	141.0	0.90	1.75	112.0	0.96	2.09	89.9	1.00	2.48	72.5	1.05	2.93	57.8	1.11	3.48	46.6	1.18	4.06
160	404.6	0.74	0.79	269.0	0.81	1.09	197.7	0.85	1.42	150.1	0.90	1.76	119.2	0.96	2.09	95.7	1.00	2.49	77.2	1.05	2.94	61.5	1.11	3.49	49.6	1.18	4.08
170	428.6	0.74	0.79	285.0	0.81	1.09	209.5	0.85	1.42	159.1	0.90	1.76	126.4	0.96	2.09	101.5	1.00	2.49	81.8	1.05	2.95	65.3	1.11	3.49	52.7	1.18	4.07
180	452.4	0.74	0.79	300.8	0.81	1.09	221.3	0.85	1.42	168.1	0.90	1.76	133.5	0.96	2.10	107.2	1.00	2.50	86.5	1.05	2.95	69.0	1.11	3.49	55.7	1.18	4.08
190	476.1	0.74	0.79	316.6	0.81	1.10	233.0	0.85	1.42	177.0	0.90	1.77	140.6	0.96	2.10	113.0	1.00	2.50	91.1	1.05	2.96	72.7	1.11	3.50	58.7	1.18	4.08
200	499.6	0.74	0.80	332.3	0.81	1.10	244.6	0.85	1.43	185.9	0.90	1.77	147.7	0.96	2.11	118.7	1.00	2.50	95.8	1.05	2.96	76.4	1.11	3.51	61.7	1.18	4.09
220	547.7	0.74	0.80	364.5	0.81	1.10	268.4	0.85	1.43	204.1	0.91	1.77	162.1	0.96	2.11	130.3	1.00	2.51	105.2	1.05	2.96	83.9	1.11	3.51	67.8	1.18	4.09
240	595.6	0.74	0.80	396.5	0.81	1.11	292.1	0.85	1.43	222.1	0.91	1.78	176.5	0.96	2.11	141.9	1.00	2.51	114.5	1.05	2.97	91.4	1.11	3.52	73.8	1.18	4.11
260	643.2	0.74	0.80	428.3	0.81	1.11	315.7	0.85	1.43	240.1	0.91	1.78	190.7	0.96	2.12	153.4	1.00	2.52	123.9	1.05	2.97	98.9	1.11	3.52	79.9	1.18	4.10
280	690.5	0.75	0.81	459.9	0.81	1.11	339.1	0.85	1.44	258.0	0.91	1.78	205.0	0.96	2.12	164.9	1.00	2.52	133.2	1.05	2.97	106.3	1.11	3.53	85.9	1.18	4.11
300	737.5	0.75	0.81	491.4	0.81	1.11	362.4	0.85	1.44	275.8	0.91	1.78	219.1	0.96	2.13	176.3	1.00	2.52	142.4	1.05	2.98	113.7	1.11	3.53	91.9	1.18	4.12

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "D". Top Width (T), Depth (D) and V₂ for RETARDANCE "B".

Grade 8.0 Percent

Q cfs	V ₁ = 2.0		V ₁ = 2.5		V ₁ = 3.0		V ₁ = 3.5		V ₁ = 4.0		V ₁ = 4.5		V ₁ = 5.0		V ₁ = 5.5		V ₁ = 6.0										
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂									
15	43.1	0.64	0.80	31.6	0.71	0.98	22.2	0.76	1.31	18.0	0.79	1.56	13.7	0.84	1.92	11.0	0.89	2.26	9.2	0.95	2.54	7.4	0.99	3.00	6.2	1.09	3.26
20	57.3	0.64	0.80	42.0	0.71	0.99	29.5	0.76	1.32	24.0	0.79	1.56	18.2	0.84	1.94	14.7	0.89	2.25	12.2	0.93	2.59	9.8	0.98	3.08	8.1	1.04	3.49
25	71.4	0.65	0.80	52.3	0.71	0.99	36.7	0.76	1.33	29.9	0.79	1.57	22.7	0.84	1.95	18.3	0.89	2.28	15.2	0.93	2.62	12.2	0.97	3.12	10.1	1.04	3.53
30	85.4	0.65	0.80	62.6	0.71	0.99	43.9	0.76	1.33	35.8	0.79	1.57	27.2	0.84	1.95	21.9	0.89	2.29	18.1	0.92	2.67	14.6	0.97	3.15	12.1	1.03	3.55
35	99.3	0.65	0.80	72.8	0.72	0.99	51.1	0.76	1.34	41.6	0.79	1.58	31.7	0.84	1.95	25.5	0.89	2.30	21.1	0.92	2.67	17.0	0.96	3.16	14.0	1.02	3.64
40	113.1	0.65	0.81	82.9	0.72	1.00	58.2	0.76	1.34	47.4	0.79	1.59	36.1	0.84	1.96	29.0	0.88	2.32	24.1	0.92	2.67	19.4	0.96	3.17	16.0	1.02	3.63
45	126.8	0.65	0.81	93.0	0.72	1.00	65.3	0.76	1.34	53.2	0.79	1.59	40.5	0.84	1.97	32.6	0.88	2.32	27.0	0.92	2.69	21.8	0.97	3.17	18.0	1.02	3.62
50	140.4	0.65	0.81	102.9	0.72	1.01	72.3	0.76	1.35	59.0	0.79	1.59	44.9	0.84	1.97	36.1	0.88	2.33	30.0	0.92	2.68	24.2	0.97	3.17	19.9	1.02	3.67
55	153.9	0.65	0.81	112.8	0.72	1.01	79.3	0.76	1.35	64.7	0.79	1.60	49.3	0.84	1.97	39.6	0.88	2.34	32.9	0.92	2.70	26.5	0.96	3.20	21.9	1.02	3.65
60	167.3	0.65	0.81	122.7	0.72	1.01	86.2	0.76	1.36	70.4	0.79	1.60	53.7	0.84	1.97	43.1	0.88	2.34	35.8	0.92	2.70	28.9	0.97	3.19	23.8	1.02	3.69
65	180.6	0.65	0.82	132.4	0.72	1.01	93.1	0.76	1.36	76.0	0.79	1.61	58.0	0.84	1.98	46.6	0.88	2.35	38.7	0.92	2.71	31.3	0.97	3.18	25.7	1.01	3.71
70	193.9	0.65	0.82	142.2	0.72	1.01	100.0	0.76	1.37	81.7	0.79	1.61	62.3	0.84	1.98	50.1	0.88	2.35	41.6	0.92	2.71	33.6	0.97	3.20	27.7	1.02	3.69
75	207.0	0.65	0.82	151.8	0.72	1.02	106.8	0.76	1.37	87.2	0.79	1.62	66.6	0.84	1.99	53.5	0.88	2.36	44.5	0.92	2.72	35.9	0.96	3.22	29.6	1.02	3.71
80	220.1	0.66	0.82	161.4	0.72	1.02	113.6	0.76	1.37	92.8	0.79	1.62	70.9	0.84	1.99	56.9	0.88	2.37	47.3	0.92	2.73	38.2	0.96	3.23	31.5	1.01	3.72
90	246.8	0.66	0.82	180.9	0.72	1.02	127.4	0.76	1.38	104.1	0.79	1.62	79.5	0.84	2.00	63.9	0.88	2.37	53.1	0.92	2.74	42.9	0.96	3.23	35.4	1.02	3.72
100	273.3	0.66	0.82	200.3	0.72	1.03	141.1	0.76	1.38	115.4	0.79	1.62	88.1	0.84	2.00	70.8	0.88	2.38	58.9	0.92	2.74	47.6	0.97	3.24	39.2	1.01	3.75
110	299.6	0.66	0.83	219.6	0.72	1.03	154.8	0.76	1.38	126.5	0.79	1.63	96.7	0.84	2.01	77.0	0.88	2.38	64.7	0.92	2.74	53.3	0.97	3.23	43.1	1.02	3.74
120	325.7	0.66	0.83	238.8	0.72	1.03	168.4	0.76	1.39	137.7	0.79	1.63	105.3	0.84	2.01	84.6	0.88	2.39	70.4	0.92	2.75	56.9	0.97	3.25	46.9	1.01	3.75
130	351.7	0.66	0.83	257.9	0.72	1.04	181.9	0.76	1.39	148.7	0.79	1.64	113.8	0.84	2.01	91.4	0.88	2.40	76.1	0.92	2.75	61.6	0.97	3.24	50.7	1.01	3.76
140	377.5	0.66	0.83	276.8	0.72	1.04	195.3	0.76	1.39	159.7	0.79	1.64	122.2	0.84	2.02	98.2	0.88	2.40	81.8	0.92	2.76	66.2	0.97	3.25	54.5	1.01	3.77
150	403.1	0.66	0.83	295.6	0.72	1.04	208.6	0.76	1.40	170.7	0.80	1.64	130.6	0.84	2.02	105.0	0.88	2.40	87.4	0.92	2.77	70.8	0.97	3.25	58.3	1.01	3.78
160	428.5	0.66	0.83	314.2	0.72	1.04	221.9	0.76	1.40	181.5	0.79	1.65	139.0	0.85	2.02	111.7	0.88	2.41	93.1	0.92	2.77	75.3	0.97	3.27	62.1	1.01	3.78
170	453.8	0.66	0.84	332.8	0.72	1.05	235.1	0.76	1.40	192.4	0.80	1.65	147.3	0.85	2.03	118.4	0.88	2.42	98.7	0.92	2.77	79.9	0.97	3.27	65.9	1.02	3.78
180	478.9	0.66	0.84	351.2	0.72	1.05	248.2	0.76	1.41	203.1	0.80	1.65	155.6	0.85	2.03	125.1	0.88	2.42	104.3	0.93	2.78	84.4	0.97	3.28	69.6	1.02	3.79
190	503.9	0.66	0.84	369.5	0.72	1.05	261.2	0.77	1.41	213.8	0.80	1.66	163.9	0.85	2.03	131.8	0.89	2.42	109.8	0.93	2.79	89.0	0.97	3.27	73.4	1.02	3.79
200	528.5	0.67	0.84	387.7	0.73	1.05	274.1	0.77	1.42	224.4	0.80	1.66	172.1	0.85	2.04	138.4	0.89	2.43	115.3	0.92	2.79	93.5	0.97	3.28	77.1	1.02	3.80
220	579.5	0.67	0.84	425.1	0.73	1.06	300.7	0.77	1.42	246.2	0.80	1.66	188.8	0.85	2.04	151.8	0.88	2.44	126.6	0.93	2.80	102.6	0.97	3.29	84.7	1.02	3.80
240	630.1	0.67	0.84	462.2	0.73	1.06	327.0	0.77	1.42	267.9	0.80	1.67	205.5	0.85	2.05	165.2	0.89	2.44	137.8	0.93	2.80	111.8	0.97	3.29	92.2	1.02	3.81
260	680.4	0.67	0.85	499.1	0.73	1.06	353.3	0.77	1.43	289.4	0.80	1.67	222.1	0.85	2.05	178.6	0.89	2.45	149.0	0.93	2.80	120.8	0.97	3.30	99.7	1.02	3.82
280	730.4	0.67	0.85	535.6	0.73	1.07	379.3	0.77	1.43	310.8	0.80	1.68	238.6	0.85	2.05	191.9	0.89	2.45	160.1	0.93	2.81	129.9	0.97	3.30	107.2	1.02	3.82
300	780.0	0.67	0.85	572.1	0.73	1.07	405.2	0.77	1.44	332.1	0.80	1.68	255.0	0.85	2.06	205.1	0.89	2.46	171.2	0.93	2.81	138.9	0.97	3.31	114.7	1.02	3.82

TABLE 3.17-B (Continued)
DESIGN TABLES FOR PARABOLIC GRASS-LINED CHANNELS

V₁ for RETARDANCE "T". Top Width (T), Depth (D) and V₂ for RETARDANCE "B".

Grade 10.0 Percent

Q cfs	V ₁ = 2.0		V ₁ = 2.5		V ₁ = 3.0		V ₁ = 3.5		V ₁ = 4.0		V ₁ = 4.5		V ₁ = 5.0		V ₁ = 5.5		V ₁ = 6.0				
	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂	T	D	V ₂			
15	51.4	0.56	0.77	38.3	0.63	0.92	27.2	0.69	1.18	19.6	0.73	1.56	15.7	0.76	1.86	12.6	0.81	2.18	8.7	0.90	2.83
20	68.2	0.55	0.78	50.9	0.63	0.92	36.2	0.69	1.18	26.1	0.73	1.56	20.9	0.76	1.87	16.8	0.81	2.18	11.5	0.88	2.91
25	85.0	0.56	0.78	63.4	0.63	0.92	45.1	0.69	1.19	32.5	0.73	1.57	26.1	0.76	1.87	20.9	0.80	2.20	17.5	0.84	2.52
30	101.6	0.56	0.78	75.8	0.63	0.92	53.9	0.69	1.20	38.8	0.72	1.58	31.2	0.76	1.88	25.0	0.80	2.22	24.3	0.83	2.55
35	118.1	0.56	0.78	88.1	0.63	0.93	62.7	0.69	1.20	45.2	0.73	1.58	36.3	0.76	1.88	29.1	0.80	2.22	27.7	0.83	2.57
40	134.4	0.56	0.79	100.3	0.64	0.93	71.3	0.69	1.21	51.5	0.73	1.59	41.3	0.76	1.90	33.2	0.80	2.22	27.7	0.87	3.00
45	150.7	0.56	0.79	112.5	0.64	0.93	80.0	0.69	1.21	57.7	0.72	1.60	46.4	0.76	1.90	37.2	0.80	2.24	31.1	0.83	2.58
50	166.8	0.56	0.79	124.5	0.64	0.93	88.5	0.69	1.21	63.9	0.72	1.60	51.3	0.76	1.91	41.3	0.80	2.23	34.5	0.83	2.58
55	182.8	0.56	0.79	136.4	0.64	0.93	97.1	0.69	1.21	70.1	0.73	1.60	56.3	0.76	1.92	45.3	0.80	2.24	37.8	0.83	2.60
60	198.6	0.56	0.79	148.2	0.64	0.94	105.5	0.69	1.22	76.2	0.72	1.61	61.2	0.76	1.92	49.3	0.80	2.25	41.1	0.83	2.61
65	214.3	0.57	0.79	160.0	0.64	0.94	113.9	0.69	1.22	82.3	0.73	1.62	66.2	0.76	1.92	53.2	0.80	2.26	44.4	0.83	2.62
70	229.9	0.57	0.79	171.6	0.64	0.94	122.2	0.69	1.23	88.4	0.73	1.62	71.0	0.76	1.93	57.2	0.80	2.26	47.7	0.83	2.63
75	245.4	0.57	0.79	183.2	0.64	0.94	130.5	0.69	1.23	94.4	0.73	1.62	75.9	0.76	1.94	61.1	0.80	2.27	51.0	0.83	2.63
80	260.7	0.57	0.79	194.6	0.64	0.95	138.6	0.69	1.24	100.3	0.73	1.63	80.7	0.76	1.94	65.0	0.80	2.27	54.3	0.83	2.63
90	292.1	0.57	0.79	218.1	0.64	0.95	155.4	0.69	1.24	112.5	0.73	1.64	90.5	0.76	1.95	73.0	0.81	2.27	60.9	0.84	2.64
100	323.3	0.57	0.79	241.6	0.64	0.95	172.1	0.69	1.24	124.6	0.73	1.64	100.3	0.76	1.95	80.9	0.81	2.28	67.5	0.83	2.65
110	354.3	0.57	0.79	264.6	0.64	0.96	188.6	0.69	1.25	136.7	0.73	1.64	110.0	0.76	1.96	88.7	0.81	2.29	74.1	0.83	2.65
120	385.0	0.57	0.79	287.6	0.64	0.96	205.0	0.69	1.25	148.7	0.73	1.65	119.6	0.76	1.97	96.5	0.81	2.29	80.6	0.83	2.66
130	415.5	0.57	0.79	310.3	0.65	0.96	221.3	0.69	1.26	160.6	0.73	1.65	129.3	0.76	1.97	104.3	0.81	2.30	87.1	0.83	2.67
140	445.7	0.57	0.79	333.0	0.65	0.96	237.5	0.69	1.26	172.5	0.73	1.65	138.8	0.76	1.97	112.1	0.81	2.30	93.5	0.83	2.68
150	475.7	0.58	0.81	355.4	0.65	0.97	253.6	0.69	1.26	184.2	0.73	1.66	148.4	0.76	1.97	119.8	0.81	2.30	100.0	0.83	2.68
160	505.5	0.58	0.81	377.7	0.65	0.97	269.5	0.69	1.27	195.9	0.73	1.66	157.8	0.76	1.98	127.4	0.81	2.31	106.4	0.83	2.69
170	535.0	0.58	0.81	399.7	0.65	0.97	285.3	0.69	1.27	207.6	0.73	1.66	167.2	0.76	1.98	135.0	0.81	2.32	112.8	0.83	2.69
180	564.3	0.58	0.81	421.7	0.65	0.97	301.0	0.70	1.28	219.1	0.73	1.67	176.6	0.76	1.99	142.6	0.81	2.32	119.1	0.83	2.70
190	593.4	0.58	0.82	443.4	0.65	0.98	316.6	0.70	1.28	230.6	0.73	1.67	185.9	0.76	1.99	150.1	0.81	2.33	125.4	0.83	2.71
200	622.2	0.58	0.82	465.0	0.65	0.98	332.1	0.70	1.28	242.1	0.73	1.68	195.2	0.76	1.99	157.6	0.81	2.33	131.7	0.83	2.71
220	681.9	0.58	0.82	509.6	0.65	0.98	364.1	0.70	1.29	265.5	0.73	1.68	214.1	0.76	2.00	173.0	0.81	2.33	144.6	0.83	2.71
240	741.1	0.58	0.82	553.8	0.65	0.99	395.9	0.70	1.29	288.8	0.73	1.68	233.0	0.76	2.00	188.2	0.81	2.34	157.4	0.84	2.72
260	799.9	0.58	0.82	597.7	0.65	0.99	427.4	0.70	1.29	312.0	0.73	1.69	251.7	0.77	2.01	203.4	0.81	2.34	170.1	0.84	2.72
280	858.2	0.58	0.83	641.3	0.65	0.99	458.7	0.70	1.30	335.0	0.73	1.69	270.4	0.77	2.01	218.5	0.81	2.35	187.7	0.84	2.73
300	916.0	0.59	0.83	684.6	0.65	0.99	489.8	0.70	1.30	357.9	0.73	1.69	289.0	0.77	2.01	233.5	0.81	2.35	195.4	0.84	2.73

Source: USDA-SCS

Sheet 14 of 14